FLEISHER'S Yarns

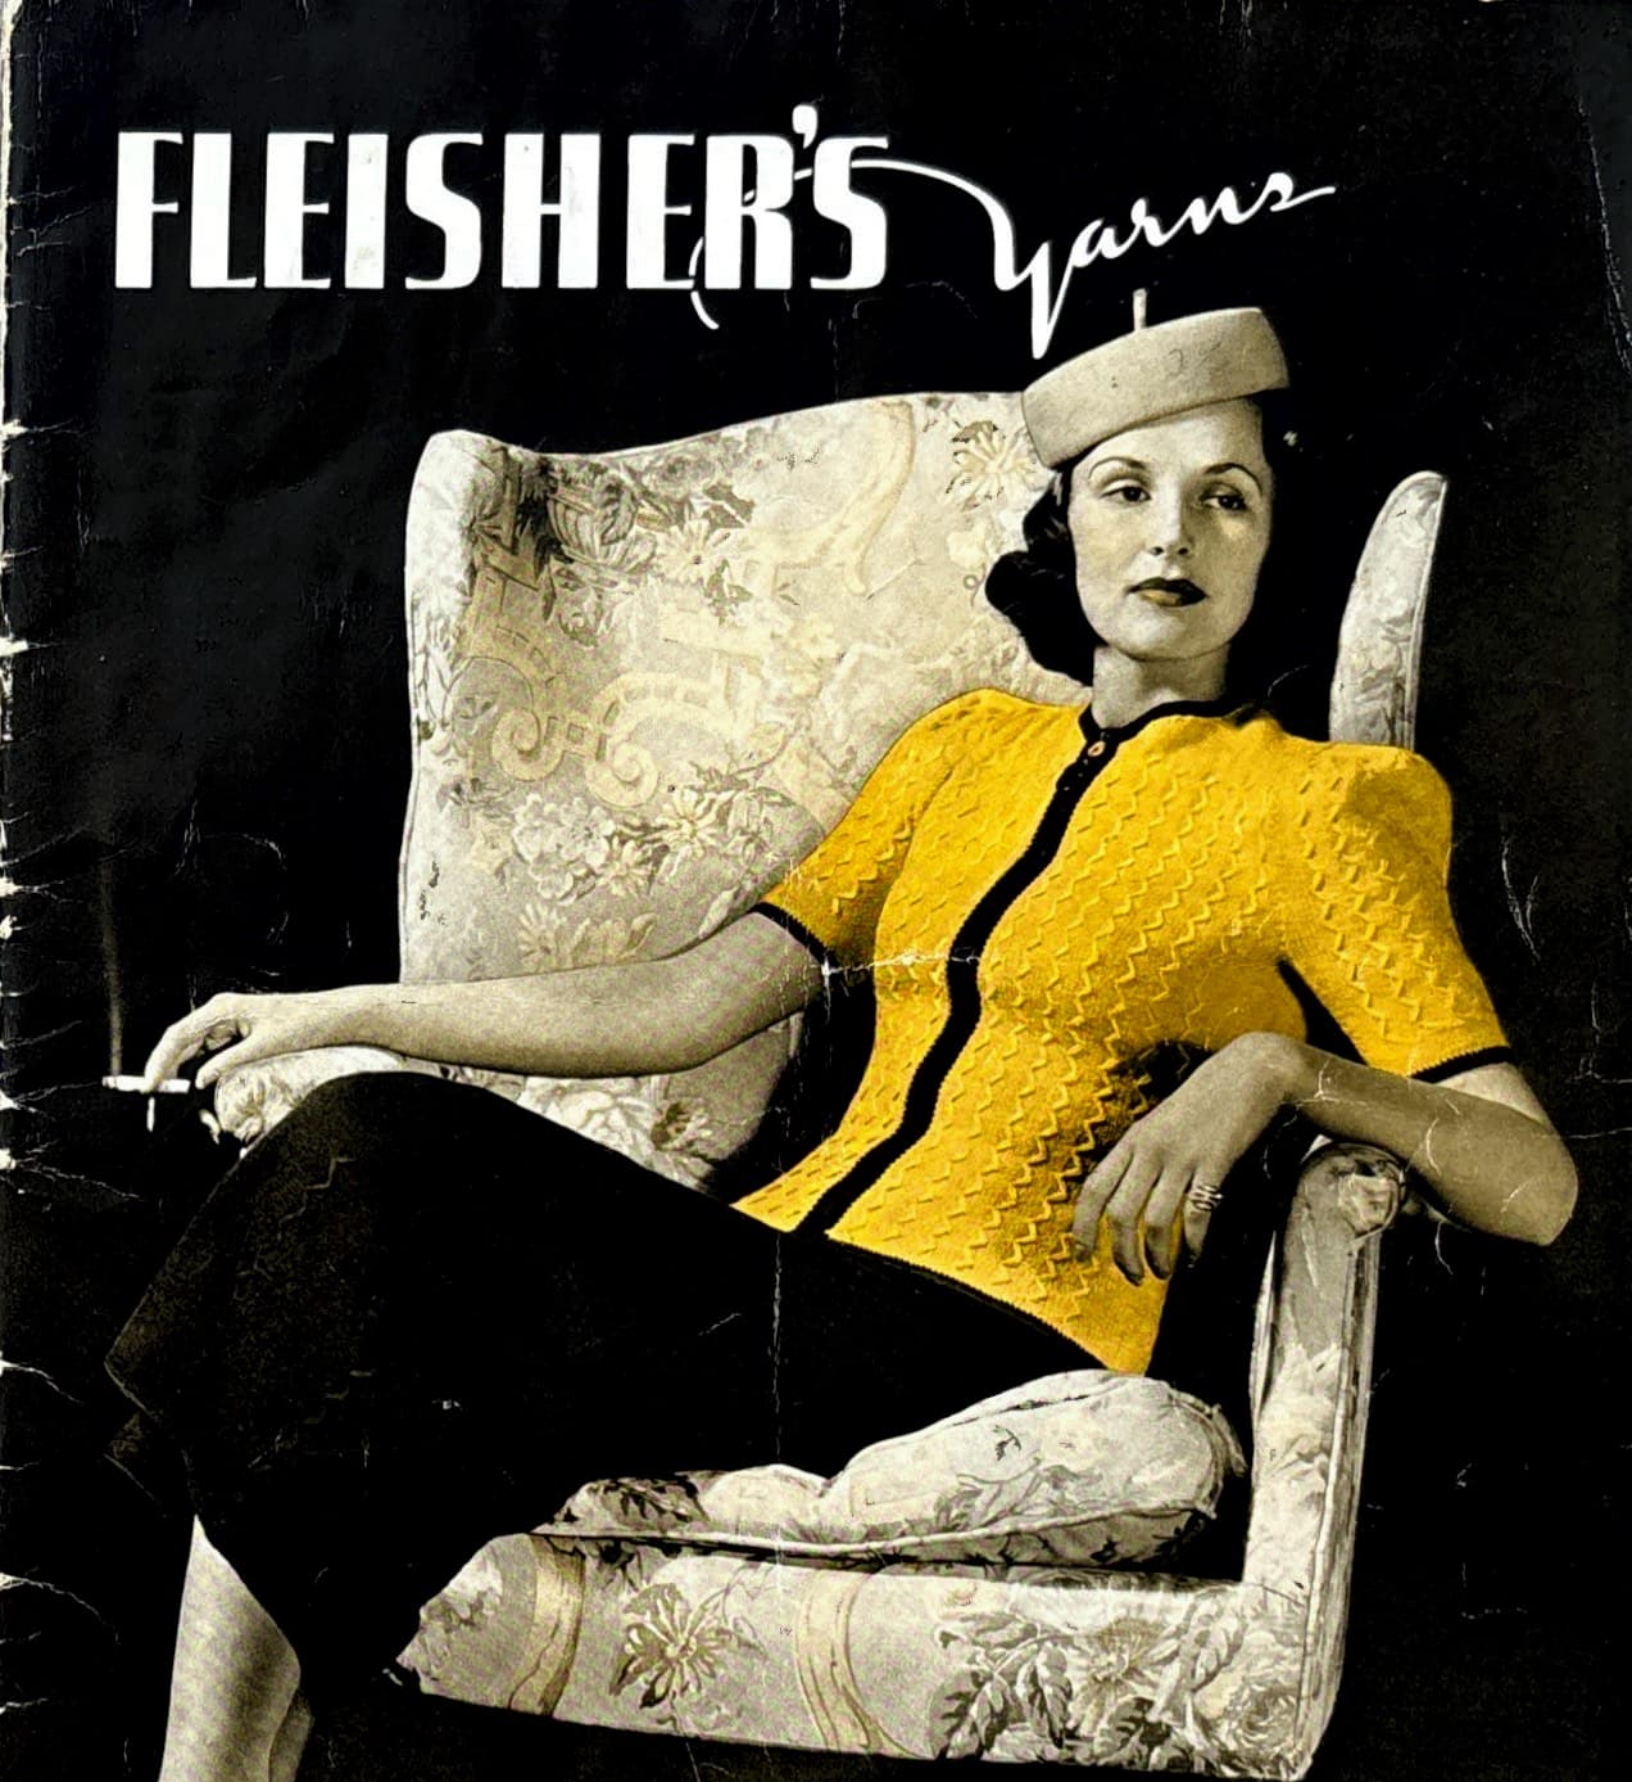

No. 2635
Directions on Page 40

T. EATON CO. LONDON
8.5
35

NEW HAND KNIT STYLES • VOL. 50 ¢ (IN U.S.A)

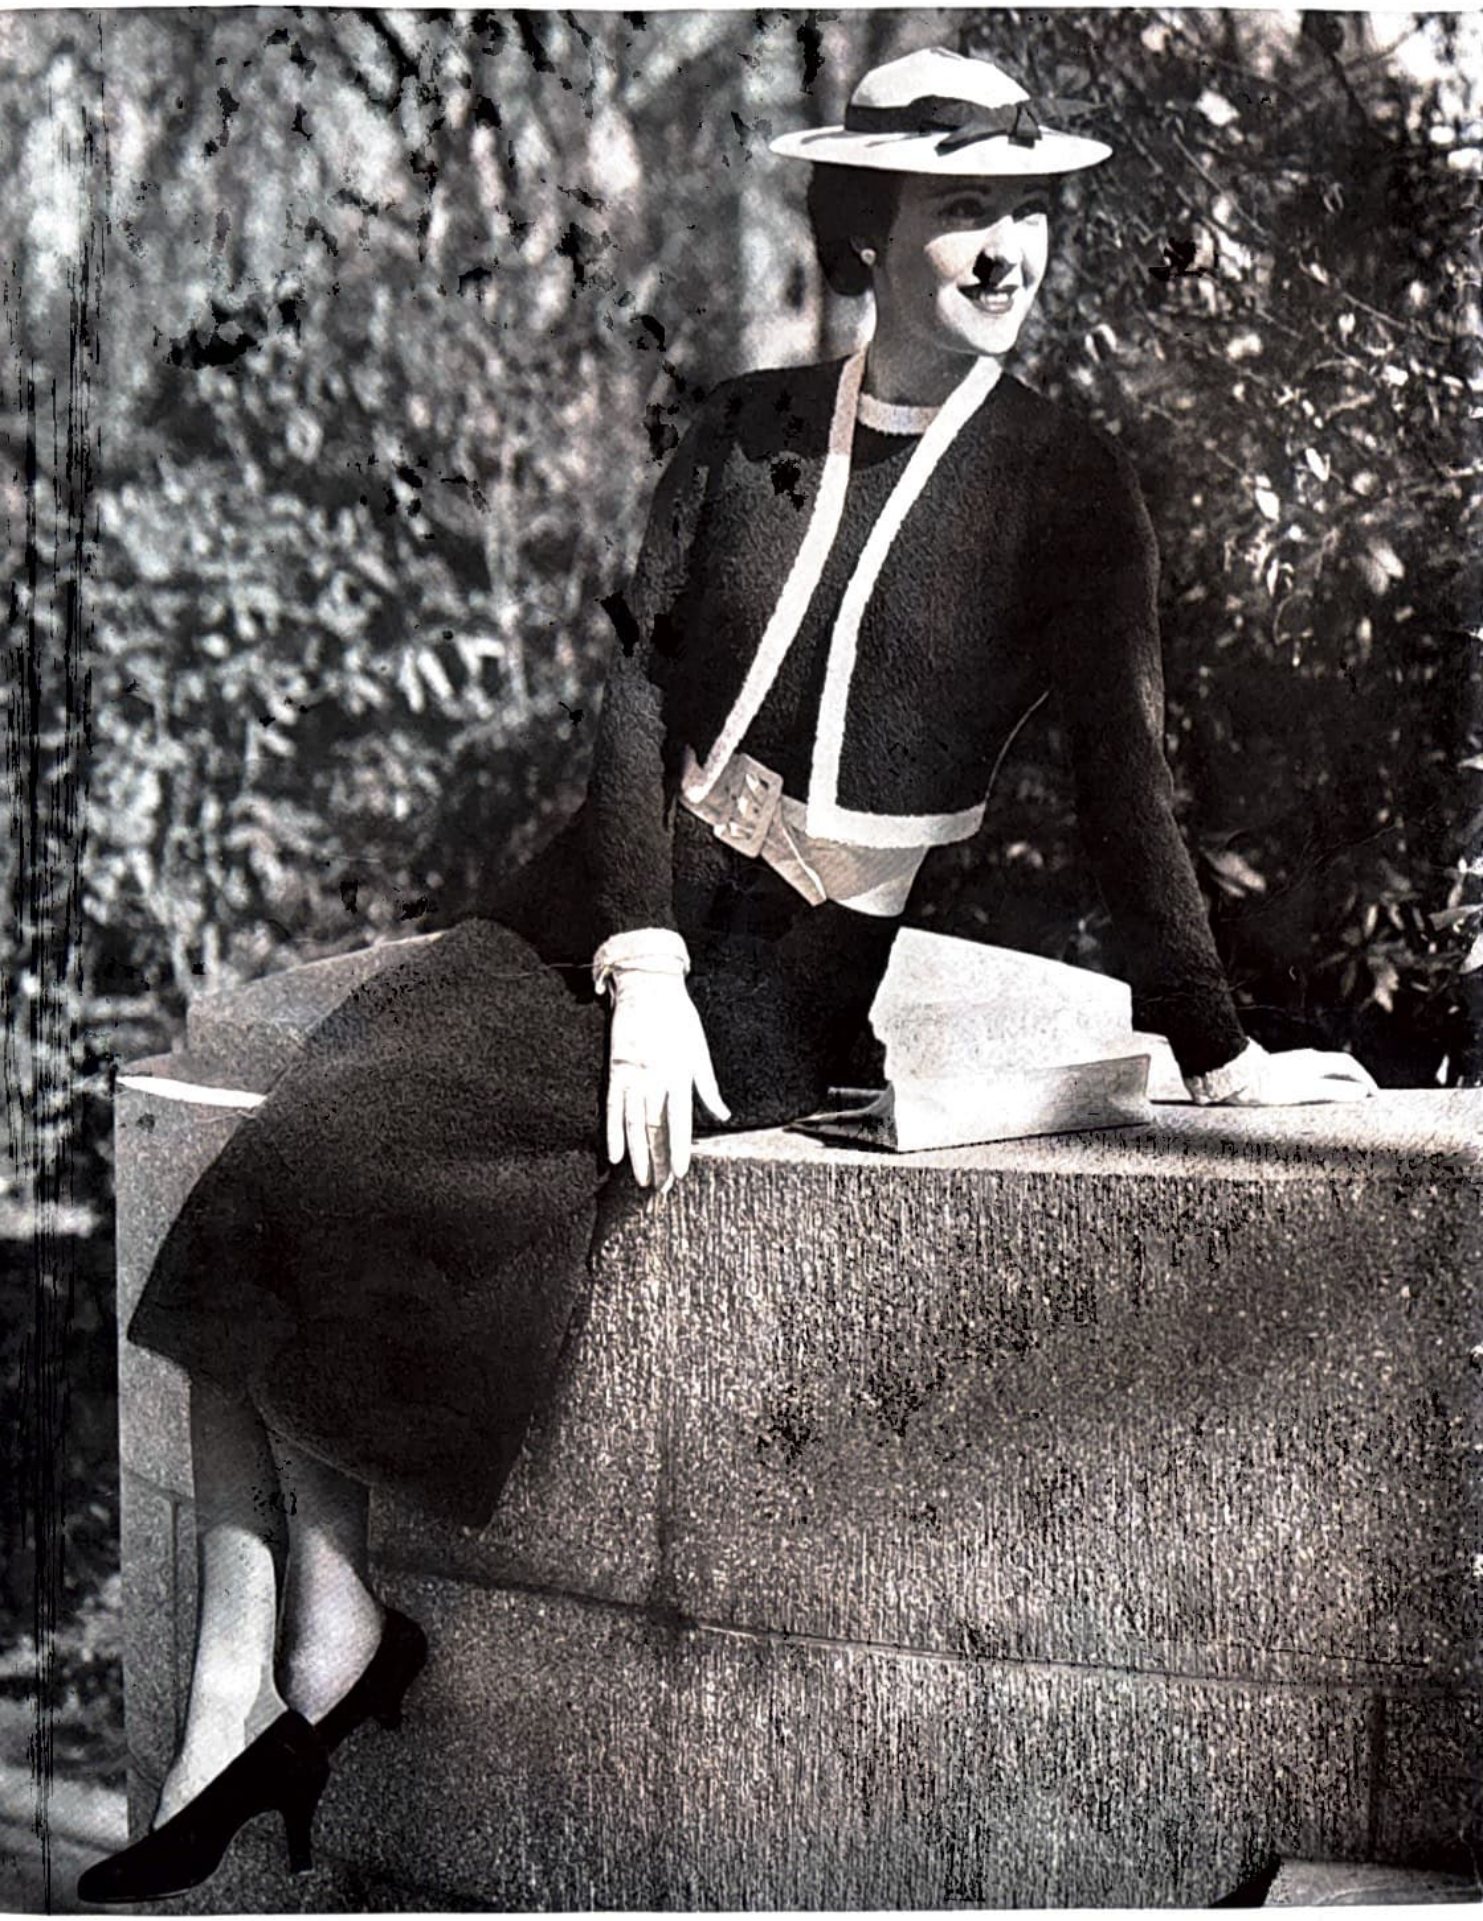

"Bolero" No. 2640

☆

Copyright 1938, in U.S.A. and Canada, Fleisher Yarns, Inc.

"BOLERO"

A SMART TWO-PIECE ENSEMBLE FOR ALL OCCASIONS

☆

No. 2640

Size 16

YARNS—Fleisher's Krinky Crepe†, 30 balls Main Color (Dress 20 balls, Bolero 10 balls), 3 balls Contrasting Color (Borders).

NEEDLES—1 Fleisher's "Comfy-Grip" Sure-Fit 27-inch Circular Steel, Art. 896, Size 2.
1 Fleisher's Steel Crochet Hook, Art. 300, Size 2.

TRIMMINGS—9 Buttons 5/8 inch diameter.
Crushable Leather Belt 3 inches wide.

IMPORTANT—Check your gauge first, see page 46.

WAIST MEASUREMENTS FOR FINISHED GARMENT

Bust 35½ inches.
Width across front at underarm 18½ inches.
Width of each back at underarm 9 inches including lap.
Length from lower edge to underarm 8 inches.
Sleeves—Width at underarm 12½ inches.
Length from lower edge to underarm 1¼ inch.

GAUGE: 7 sts = 1 inch 11 rows = 1 inch

Entire waist is worked back and forth on circular needle in stockinette st (p 1 row, k 1 row).

FRONT—With main color cast on 101 sts for lower edge. P 1 row. K 1 row, increasing 1 st in every 6th st 15 times, k to end (116 sts).

Increase 1 st each side every inch 7 times (130 sts). Work even until 8 inches from lower edge, ending with a p row.

Armholes—Bind off 7 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every p row 7 times (102 sts, 1½ inches above underarm).

Pockets—Next row begin slanted pocket opening on left side of front as follows: K 9, increase 1 st in next st, k 1, turn; slip remaining 91 sts to a strand of yarn. P 1 row.

Next row—K 10, increase 1 st in next st, k 1. P 1 row. Continue in this way, increasing 1 st in 2nd st from end of every k row until there are 23 sts on needle, ending with a k row. Break off and slip sts to a strand of yarn. Beginning with st next to left pocket, slip 80 sts from thread to needle, leaving remaining 11 sts on strand of yarn. Join yarn at inside edge of left pocket, k 2 tog, k 76, k 2 tog. P 1 row.

Decrease 1 st each side every k row 11 times more, ending with a k row (56 sts). Break off and slip sts to same strand of yarn as sts of left pocket. Slip remaining 11 sts to needle. Join yarn at inside edge, increase 1 st in first st, k to end of row. Repeat increase at beginning of every k row 11 times, ending with a k row (23 sts), turn. P 23 sts, slip 79 sts from thread to left end of needle and p across these sts (102 sts). Work even until 4 inches above underarm, ending with p row.

Neck Shaping and Shoulders—K 30 sts, slip remaining 72 sts to a strand of yarn. Work even on 30 sts until 5 inches above underarm, ending with p row.

Next row—K 13, k 2 tog twice, k 13 (dart).

Repeat dart decreases every 6th row 3 times more, always having 1 st less before and after decreases (22 sts).

Work even until 7 inches above underarm. Bind off all sts. Leaving the 42 center sts on thread, slip 30 sts to needle, finish to correspond to first side.

Pocket Linings—Join yarn in end of first increased row of right pocket, working from right side, pick up and k 21 sts across increased edge. P 1 row.

* K 1 row, increasing 1 st at beginning and decreasing 1 st at end of row. P 1 row. Repeat from * twice. Bind off. Join yarn at end of last increased row of left pocket. Pick up and k 21 sts across increased edge of opening. Work to correspond to right side, decreasing at beginning and increasing at end of k rows.

LEFT BACK—With main color cast on 47 sts for lower edge. P 1 row. K 1 row, increasing 1 st in every 5th st 8 times, k to end (55 sts).

Keeping back edge even increase 1 st at underarm edge (end of k rows) every inch 7 times (62 sts). Work even until same length as front to underarm.

Shape armhole as on front, binding off at beginning of a p row (48 sts). Work even until 6 inches above underarm, ending with a k row.

Next row—P 22 sts, turn, slip remaining 26 sts to a strand of yarn for back of neck. Work even on 22 sts until 6½ inches above underarm. Bind off.

RIGHT BACK—Cast on 47 sts. Work to correspond to left back, shaping underarm edge at *beginning* of k rows and beginning first buttonhole on 20th row as follows: K to within 6 sts of end of row, bind off next 4 sts, k to end. On the following row cast on 4 sts over the bound-off sts. Repeat buttonhole on every 17th and 18th row 7 times. There should be about ¾ inch above last buttonhole before slipping sts to a strand of yarn for back of neck. Finish to correspond to left back.

SLEEVES—With contrasting color cast on 84 sts for border. Work stockinette st for 1 inch, ending with a k row.

Next row k, increasing 1 st in every 20th st 4 times (88 sts). Last row will form a ridge on right side for hem line. Beginning with a k row, work stockinette st for 1 inch. Break off. With main color work 3 rows. Bind off 7 sts at beginning of each of next 2 rows. Decrease 1 st each side every 2nd row 21 times. Work 1 row even. Decrease 2 sts each side of next row. Bind off remaining 28 sts. Make other sleeve in same way.

NECK BORDER—Sew shoulder seams. With right side toward you, slip 26 sts of left back neck edge to needle, pick up 20 sts on side neck edge, slip 42 sts of front neck edge to needle, pick up 20 sts on right neck edge, slip 26 sts of right back to needle (134 sts), join contrasting color. P 1 row.

Next row—K 25, k 3 tog, k 16, k 3 tog, k 40, k 3 tog, k 16, k 3 tog, k 25 (126 sts). Continue stockinette st, decreasing 2 sts at each of the 4 corners every 2nd row 4 times more, making a buttonhole on right back in 5th and 6th row of border (94 sts). K a row on wrong side for hem line, decreasing as follows: * K 10, k 2 tog, k 13, k 2 tog, k 13, k 2 tog, repeat from * once, k 10 (88 sts). Next row, increase 2

(*continued on page* 30)

"TERRACE"

CHIC FOR AFTERNOON DATES OR SHOPPING IN TOWN

☆

No. 2634

Size 16

YARNS—Fleisher's Cassimere Sport Yarn†, 11 balls.
NEEDLES—1 Fleisher's "Comfy-Grip" Sure-Fit 27-inch Circular Steel, Art. 896, Size 3.
1 Fleisher's Steel Crochet Hook, Art. 300, Size 2.
TRIMMINGS—Leather Belt 3 inches wide.
IMPORTANT—Check your gauge first, see page 46.

WAIST

MEASUREMENTS FOR FINISHED GARMENT
Bust 34½ inches.
Width across back at underarm 16½ inches.
Width across back at shoulders 12½ inches.
Length from lower edge to underarm 8 inches.
Sleeves—Width below underarm 12½ inches.
Length from lower edge to underarm 18 inches.

GAUGE:

7 sts = 1 inch 9 rows = 1 inch

The entire waist is worked back and forth on circular needle.

BACK—Cast on 105 sts for lower edge. Work even in stockinette st (p 1 row, k 1 row) for 1½ inches.
Increase 1 st each side of next row and repeat increases every 1½ inches 4 times more (115 sts).
Work even until 8 inches from lower edge.

Armholes—Bind off 7 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 7 times (87 sts). Work even until 5 inches above underarm, ending with a k row.

Yoke—**First row**—P 43, k 1, p 43.
2nd and all even numbered rows—K all sts.
3rd row—P 41, k 5, p 41.
5th row—P 39, k 9, p 39.
7th row—P 37, k 13, p 37.
9th row—P 35, k 17, p 35.
Work next 6 rows in garter st (k every row).

Shoulders—Continuing garter st, bind off 7 sts at beginning of each of next 6 rows (21 sts for each shoulder). Bind off remaining 45 sts for back of neck.

POCKET LININGS—Cast on 26 sts for lower edge. Work stockinette st for 2½ inches, ending with a k row. Break yarn and slip these sts to a strand of yarn. Make another pocket lining in same way.

FRONT—Cast on 3 sts for beginning of 1 panel.
First row (wrong side)—Increase 1 st in first st, p 1 and mark for center st, increase 1 st in last st (5 sts).
2nd row—Increase 1 st in each of 2 sts, k center st, increase 1 st in each of 2 sts (9 sts).
3rd row—Increase 1 st in first st, p to within 1 st of end, increase 1 st in last st (11 sts).
4th row—Increase 1 st in first st, k to within 1 st of center st, increase 1 st in next st, k center st, increase 1 st in next st, k to within 1 st of end, increase 1 st in last st (15 sts).
Repeat last two rows until there are 33 sts on needle, ending on right side. Break yarn, slip these sts to a strand of yarn.
Make another panel piece in same way and slip to a separate strand of yarn.
Cast on 21 sts, * with wrong side toward you slip the 33 sts of 1 panel piece to left hand end of needle, p across these sts *, cast on 25 sts on right end of needle, repeat between *'s once, cast on 21 sts at end of row (133 sts).
First row—K 21, * slip, k and pass (always slip st as if to k), k 13, increase 1 st in next st, k center st of panel, increase 1 st in next st, k 13, k 2 tog *, k 25, repeat between *'s once, k 21 (133 sts).
2nd row—Purl.
Repeat these 2 rows until 1½ inches from cast-on sts (lower edge). Continuing to work panels as before, increase 1 st each side of next row and repeat increases every 1½ inches 4 times more, having 1 st more before first and after 2nd panel after each successive increase row (143 sts).
Work even until 8 inches from lower edge, ending with a p row (measure at center front).

Armholes—Continuing panels bind off 12 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every k row twice (115 sts).
Next row—P 12, k 33, p 25, k 33, p 12.
Next row—K 2 tog, k 10, * work panel pattern over next 33 sts *, k 25, repeat between *'s once, k 10, k 2 tog (113 sts).
Next row—P 11, k 33, p 25, k 33, p 11.
Continue to decrease 1 st each side every 2nd row 4 times more, working panels as in last 2 rows to form garter st border (105 sts). On next row worked from right side, k 7, * bind off next 33 sts for pocket opening *, k until 25 sts from bind-off, repeat between *'s once, k to end.
Next row—P 7, * slip sts of 1 pocket lining to left hand end of needle with k side of lining to wrong side of front, p across these sts *, p 25, repeat between *'s once, p 7 (91 sts). Discontinue panels and work even in stockinette st (k 1 row, p 1 row) until 5 inches above underarm, ending with a k row.

Yoke—**First row (wrong side)**—P 45, k 1, p 45.
2nd row—K all sts.
Continue yoke, working 4 sts more in garter st (as on back) every 2nd row 4 times more (17 sts in garter st). Work 6 rows in garter st.

Shoulders—Shape as on back. Bind off remaining 49 sts for front of neck.

SLEEVES—Cast on 49 sts for lower edge. Work 12 rows in garter st (6 ridges).
13th row (wrong side)—P 16, k 17, p 16.
14th row—K all sts.
15th row—P 18, k 13, p 18.
Continue in this way, working 4 sts less in garter st every 2nd row 3 times more (1 st in garter st). Working all sts in stockinette st (k 1 row, p 1 row), increase 1 st each side of next row and repeat increases every 8th row 10 times, every 4th row 8 times (87 sts).
Work even until 18 inches from lower edge.
Bind off 10 sts at beginning of each of next 2 rows. Decrease 1 st each side every 2nd row 20 times, then 1 st each side of next 2 rows. Bind off remaining 23 sts for top of sleeve.
Make other sleeve in same way.

(*continued on page* 31)

"Terrace"
No. 2634

☆

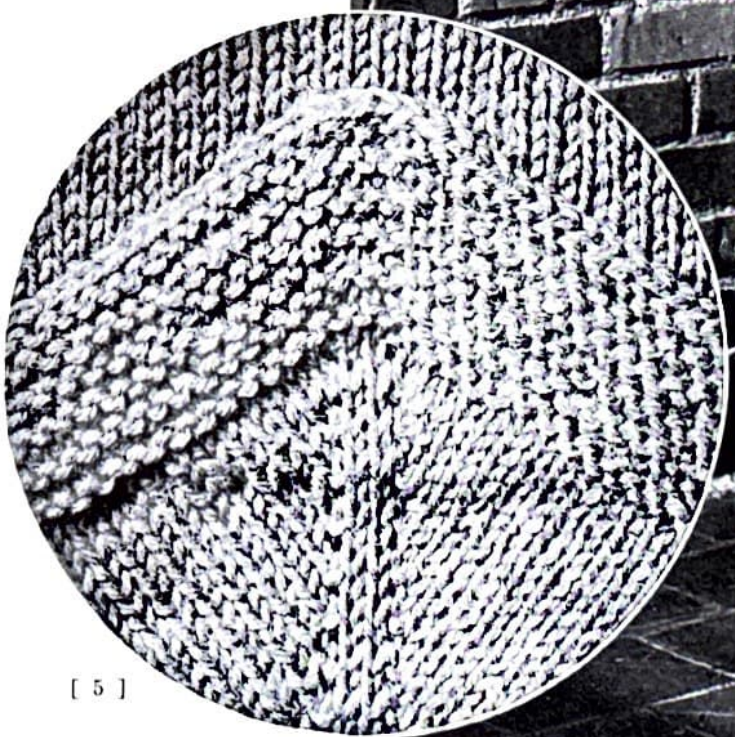

"Country Club"
No. 2631

☆

"COUNTRY CLUB"

HIGH FASHION FOR DRESSY OCCASIONS

☆

No. 2631

Size 16

YARNS—Fleisher's Angel Crepe†, 20 balls (Blouse 8 balls, Skirt 12 balls).
NEEDLES—1 Fleisher's "Comfy-Grip" Sure-Fit 27-inch Circular Steel, Art. 896, Size 2.
1 Fleisher's Steel Crochet Hook, Art. 300, Size 2.
TRIMMINGS—Talon Slide Fastener Style 106, 8 inches long.
Leather Belt ½ inch wide.
IMPORTANT—Check your gauge first, see page 46.

BLOUSE

MEASUREMENTS FOR FINISHED GARMENT

Bust 35 inches.
Width across back at underarm 16 inches.
Width across back at shoulders 13 inches.
Length from lower edge of border to underarm 14¼ inches.
Sleeves—Width at underarm 13½ inches.
Length from lower edge to underarm 4 inches.
Length from lower edge to top 9¼ inches.

GAUGE: 17 sts = 2 inches 11 rows = 1 inch

Entire blouse is worked back and forth on circular needle.

BACK—Cast on 124 sts for lower edge. Work stockinette st (p 1 row, k 1 row) for 2 inches, ending with a p row.

Decrease 1 st each side of next row and repeat decreases every 6th row 7 times more (108 sts at waistline). Work 7 rows even.

Begin 2 darts. **First increase row**—K 36, * cast on 1 st (make a loop on right hand end of needle), k 1 (seam st), cast on 1 st *, k 34, repeat between *'s once, k 36 (112 sts). Work 7 rows even.

2nd increase row—K 37, * cast on 1 st, k 1, cast on 1 st *, k 36, repeat between *'s once, k 37 (116 sts). Continue in this way, increasing 4 sts every 8th row 5 times more (by casting on 1 st at each side of the 2 seam sts), having 2 sts more between darts and 1 st more each side after each increase row (136 sts). Work even until 14 inches from lower edge.

Armholes—Bind off 7 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 6 times (110 sts). Work even until 6 inches above underarm.

Shoulders—Bind off 4 sts at beginning of each of next 18 rows (36 sts for each shoulder). Bind off remaining 38 sts for back of neck.

FRONT—Cast on 132 sts for lower edge. Work same as back up to completion of decreases at waistline (116 sts).

Diagonal Openwork Pattern—**First and all odd numbered rows**—Purl.

2nd row—K 2, * k 2 tog, over, k 18, k 2 tog, over, increase 1 st in next st *, k 66 (stockinette st triangle at center), † increase 1 st in next st, over, k 2 tog, k 18, over, k 2 tog †, k 2 (118 sts).

4th row—K 4, repeat between *'s of 2nd row once, k 64, repeat between †'s of 2nd row once, k 4 (120 sts).

6th row—K 6, repeat between *'s as before, k 62, repeat between †'s as before, k 6 (122 sts).

8th row—K 8, repeat between *'s, k 60, repeat between †'s, k 8 (124 sts).

10th row—K 10, repeat between *'s, k 58, repeat between †'s, k 10 (126 sts).

12th row—K 12, repeat between *'s, k 56, repeat between †'s, k 12 (128 sts).

14th row—K 14, repeat between *'s, k 54, repeat between †'s, k 14 (130 sts).

16th row—K 16, repeat between *'s, k 52, repeat between †'s, k 16 (132 sts).

18th row—K 18, repeat between *'s, k 50, repeat between †'s, k 18 (134 sts).

20th row—* K 2 tog, over, k 18, k 2 tog, over, k 18, k 2 tog, over, increase 1 st in next *, k 48, † increase 1 st in next st, over, k 2 tog, k 18, over, k 2 tog, k 18, over, k 2 tog † (136 sts).

22nd row—K 2, repeat between *'s of 20th row once, k 46, repeat between †'s of 20th row once, k 2 (138 sts). Continue diagonal openwork stripes, increasing 1 st at each side of stockinette st triangle every k row 12 times more and starting a new openwork stripe at each side when enough sts have been added; there will be 2 sts less in center triangle, 2 sts more at each side in each successive k row and always 18 sts between openwork stripes. This completes increases at center.

47th row—Purl (162 sts).

48th row—K 8, k 2 tog, over, * k 18, k 2 tog, over, repeat from * twice, k 22, over, k 2 tog, † k 18, over, k 2 tog, repeat from † twice, k 8.

50th row—K 10, k 2 tog, over, * k 18, k 2 tog, over, repeat from * twice, † k 18, over, k 2 tog, repeat from † 3 times, k 10. Continue diagonal stripes for 8 rows more, having 4 sts less in center triangle and 2 sts more at each side after each successive k row (2 sts in triangle). This completes 2 center stripes. On next row worked from wrong side, p 81 for right side, slip remaining 81 sts on holder for left side.

2nd row—K 19, over, k 2 tog, * k 18, over, k 2 tog *, repeat between *'s twice.

4th row—K 17, over, k 2 tog, repeat between *'s of 2nd row 3 times, k 2. Continue the 4 diagonal stripes until 14 inches from lower edge, ending at underarm edge (*do not* start a new openwork stripe).

Armhole and Neck Shaping—Bind off 11 sts at beginning of next row for underarm. Continuing stripes and keeping center edge even, decrease 1 st at armhole edge every 2nd row 10 times (60 sts). Work even until 8 inches from center front opening, working stockinette st when openwork stripes have been worked off. Bind off 2 sts at center edge every 2nd row, keeping armhole edge even until 6½ inches above underarm.

Shoulder—Bind off 4 sts at armhole edge every 2nd row 9 times, continuing to bind off at neck edge as before until 24 sts in all have been bound off, then work neck edge even. Fasten off. Take up sts of left side. Join yarn at center edge and work to correspond to right side.

(*continued on page* 32)

"Sophisticate"
No. 2632

☆

"SOPHISTICATE"

SO NEW WITH ITS MOLDED BODICE EFFECT

☆

No. 2632

Size 16

YARNS—Fleisher's Magic Flake†, 17 balls.
Fleisher's Angel Crepe†, 2 balls.
NEEDLES—1 Fleisher's "Comfy-Grip" Sure-Fit 27-inch Circular Steel, Art. 896, Size 2.
1 Fleisher's Steel Crochet Hook, Art. 300, Size 2.
TRIMMINGS—Talon Slide Fastener Style 106, 6 inches long.
IMPORTANT—Check your gauge first, see page 46.

SKIRT

MEASUREMENTS FOR FINISHED GARMENT

Width at lower edge 46 inches around.
Hipline (7 inches below Waistline) 37 inches.
Waistline 29 inches.
Length 30 inches.

GAUGE: 17 sts = 2 inches 11 rounds = 1 inch

With Magic Flake cast on 390 sts for lower edge. Join, taking care sts do not twist on needle. K until skirt measures 5 inches. Mark end of round as an aid in counting.

First decrease round—* K 24, k 2 tog; repeat from * around (15 decreases, 375 sts). K until 10 inches.

2nd decrease round—* K 23, k 2 tog; repeat from * around (360 sts). Continue to decrease 15 sts in a round every 5 inches twice more, having 1 st less between decreases in each successive decrease round and counting previous decrease round in part worked even (330 sts). Work until 23 inches from lower edge, or to within 7 inches of desired finished length. Decrease 15 sts as before (315 sts at hipline). Continue to decrease 15 sts every 1½ inches twice; every inch twice (255 sts). Work until 29 inches.

10th decrease round—* K 23, k 2 tog; repeat from * 9 times, finish round (245 sts). K until 30 inches from lower edge.

Next round—Bind off 121 sts, k to end of round.

Bodice—Work back and forth in stockinette st (p 1 row, k 1 row) on remaining 124 sts, binding off 8 sts at beginning of each of next 2 rows, then 4 sts at beginning of each of next 8 rows. Decrease 1 st each side every row until all sts are decreased. Fasten off.

Crochet Band—Working from right side, join Angel Crepe at beginning of bodice shaping on left side.

First row—1 s c in each of 26 sts, * 2 s c in next st, 1 s c in each of 6 sts; repeat from * to point of bodice, 3 s c in point, finish other shaped edge to correspond. Ch 1, turn at end of every row.

2nd row—Decrease 1 st each side by working 11th and 12th st from each end as 1 s c; work 3 s c in point.

3rd row—Work 15th and 16th st from each end as 1 s c; 3 s c in point.

4th row—Work 19th and 20th st from each end as 1 s c; 3 s c in point.

5th row—Work 9th and 10th st from each end as 1 s c; 3 s c in point. Fasten off.

Using Magic Flake and working from right side, work 2 rows s c on lower edge of skirt, keeping work flat.

WAIST

MEASUREMENTS FOR FINISHED GARMENT

Bust 36 inches including Slide Fastener.
Width across back 1 inch below sleeve 16½ inches.
Width across each front 1 inch below sleeve 9½ inches.
Length from lower edge of back to sleeve 8 inches.
Sleeves—Width at lower edge 11 inches.
Length 3½ inches.

GAUGE: 17 sts = 2 inches 13 rows = 1 inch

BACK—With Magic Flake cast on 124 sts for lower edge. P 1 row (right side). K 1 row, increasing 1 st in every 24th st 5 times (129 sts). P 1 row, k 1 row for 4 rows. Begin pattern. K 1 row, p 1 row for 5 rows. Repeat last 5 rows for waist, forming 5 ridges on right side, then 5 ridges on wrong side. Work until 12 rows from lower edge.

Next row increase 1 st each side. Repeat increases every inch 5 times (141 sts). Work even until 96 rows from lower edge.

Sleeve Shaping—Increase 1 st each side every 2nd row 5 times (106 rows from lower edge, 151 sts). Cast on 24 sts at beginning of each of next 2 rows (199 sts). Work 5½ inches even (72 rows).

Shoulder Shaping—Bind off 16 sts at beginning of each of 2 rows; 10 sts at beginning of each of 6 rows; 5 sts at beginning of each of 14 rows. Bind off remaining 37 sts for back of neck.

LEFT FRONT—With Magic Flake cast on 74 sts for lower edge. Work short rows as follows:

First row (right side)—K 5 sts, turn. **2nd row**—Slip 1 st, p to end.

3rd row—K 10 sts, turn. **4th row**—Like 2nd row.

5th row—K 15 sts, turn. **6th row**—Slip 1 st, k to end.

7th row—P 20 sts, turn. **8th row**—Like 6th row.

9th row—P 25 sts, turn. **10th row**—Like 6th row.

Working across all sts, * k 1 row, p 1 row, k 1 row, p 1 row.

Next row increase 1 st in first st (underarm edge), k to end. K 1 row, p 1 row for 5 rows. Repeat from * (last 10 rows) 7 times (82 sts). Work 10 rows even. There should be 4 more rows on underarm edge of front than on back up to sleeve shaping, ending at underarm edge.

Sleeve Shaping—Increase 1 st at underarm edge every 2nd row 5 times (110 rows from lower edge). Cast on 24 sts at underarm edge (111 sts). Work even until same number of rows as on back sleeve. Shape shoulder as on back. Bind off remaining 30 sts for neck edge.

RIGHT FRONT—Cast on 74 sts. **First row** (wrong side)—P 5, turn. **2nd row**—Slip 1, k to end.

3rd row—P 10 sts, turn. **4th row**—Like 2nd row.

5th row—P 15 sts, turn. **6th row**—Slip 1 st, p to end.

7th row—K 20 sts, turn. **8th row**—Like 6th row.

9th row—K 25 sts, turn. **10th row**—Like 6th row.

Working all sts, p 1 row, k 1 row for 4 rows.

Next row increase 1 st in first st (underarm edge), p

(*continued on page* 32)

"Connoisseur"
No. 2639

☆

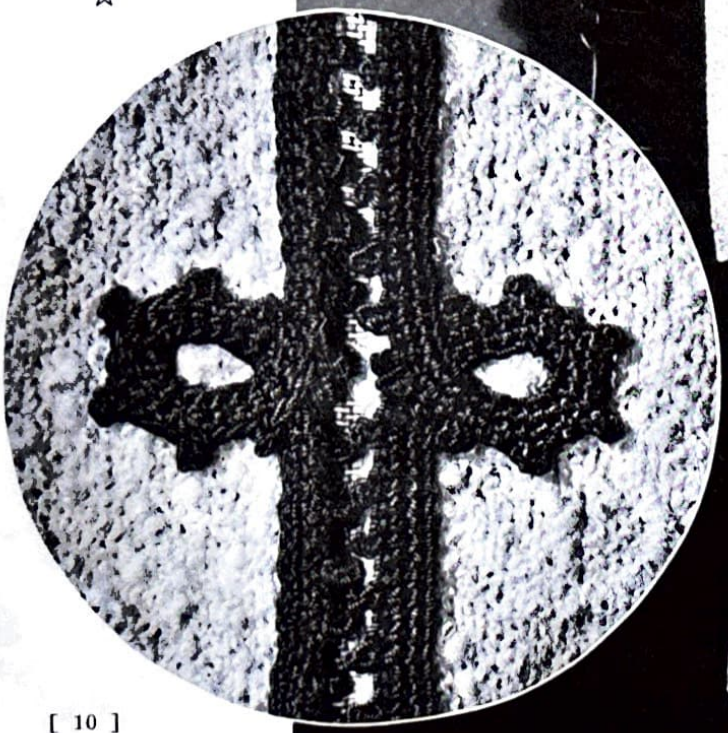

"CONNOISSEUR"

DESIGNED TO PLEASE THE "KNOWING KNITTER"

☆

No. 2639

Size 16

YARNS—Fleisher's Krinky Crepe†, 25 balls (Jacket 11 balls, Skirt 14 balls).
Bucilla Floraltone Wondersheen, 1 skein Contrasting Color (Braid).
NEEDLES—1 Fleisher's "Comfy-Grip" Sure-Fit 27-inch Circular Steel, Art. 896, Size 2.
Fleisher's Steel Crochet Hooks, Art. 300, 1 each Sizes 2 and 4.
TRIMMINGS—Talon Slide Fastener Style 101, 14 inches long.
1 yd. Grosgrain Ribbon 1½ inches wide (Shoulder Pads).
IMPORTANT—Check your gauge first, see page 46.

JACKET

MEASUREMENTS FOR FINISHED GARMENT
Bust 35 inches.
Width across back at underarm 16 inches.
Width across back at shoulders 13 inches.
Length from lower edge to underarm 13½ inches.
Sleeves—Width below underarm 13 inches.
Length from lower edge to underarm 18 inches.

GAUGE: 7 sts = 1 inch 11 rows = 1 inch

Entire jacket is worked back and forth on circular needle, with Krinky Crepe in stockinette st (p 1 row, k 1 row).

BACK—Cast on 105 sts for lower edge. Work 36 rows, ending with a k row.
Decrease 1 st each side of next row and repeat decreases every 6th row 3 times more (97 sts). Work even until 5½ inches from lower edge, ending with a p row.
Waistline decrease row—K 17, * k 2 tog, k 14, repeat from * across row (92 sts).
Increase 1 st each side every 6th row 10 times (112 sts). Work even until 13½ inches from lower edge.
Armholes—Bind off 5 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 5 times (92 sts). Work even until 6 inches above underarm.
Shoulders—Bind off 4 sts at beginning of each of next 14 rows, then 3 sts at beginning of each of next 2 rows (31 sts for each shoulder). Bind off remaining 30 sts for back of neck.

RIGHT FRONT—Cast on 50 sts for lower edge. Work 3 rows, ending with a p row.
4th row—Increase 1 st in first st (rounded corner of front edge), k across row (51 sts). Repeat these 4 rows 8 times more (59 sts). Decrease 1 st at beginning of next row (underarm edge) and repeat decrease at underarm edge every 6th row 3 times more, keeping front edge even (55 sts).
Work even until 5½ inches from lower edge, ending with a p row.
Waistline decrease row—K 11, * k 2 tog, k 9, repeat from * across row (51 sts). Work 5 rows even.
Increase row—K 10, increase 1 st in next st, * k 7, increase 1 st in next st, repeat from * across row (57 sts).
Keeping front edge even, increase 1 st at underarm edge every 6th row 9 times (66 sts). Work even until same length as back to underarm, ending at underarm edge.
Armhole and Neck Shaping—Bind off 9 sts at beginning of next row for underarm. Keeping front edge even, decrease 1 st at armhole edge every 2nd row 8 times (49 sts). Work even until 3¾ inches above underarm, ending at front edge.
Decrease 1 st at beginning of next row and repeat decrease at neck edge every 2nd row, keeping armhole edge even until 6½ inches above underarm.
Shoulder—Bind off 4 sts from armhole edge every 2nd row 7 times, then 3 sts once, continuing to decrease at neck edge as before until there are 18 decreases in all, then work neck edge even. Fasten off.

LEFT FRONT—Cast on 50 sts for lower edge. Work 3 rows, ending with a p row.
4th row—K across row increasing 1 st in last st (front edge). Repeat these 4 rows 8 times more (59 sts).
Work to correspond to right front up to 5th row above waistline decrease, ending with a p row.
Increase row—* Increase 1 st in first st, k 7, repeat from * 5 times, ending last repeat k 10 (57 sts).
Finish to correspond to right front, shaping armhole at *beginning* and neck at *end* of k rows.

SLEEVES—Cast on 49 sts for lower edge. Work even for 2½ inches, ending with a p row.
Increase 1 st each side of next row and repeat increases every 8th row 20 times more (91 sts). Work even until 18 inches from lower edge.
Bind off 7 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 17 times; then every 4th row 4 times. Bind off 2 sts at beginning of each of next 4 rows. Bind off remaining 27 sts for top of sleeve.
Make other sleeve in same way.

FINISHING—Sew seams. Sew sleeves to armholes with sleeve seam at center underarm, pleating extra fullness into a 1½ inch box pleat at top of sleeve, with center of pleat at shoulder seam. Join Krinky Crepe on back neck edge at right shoulder seam. With size 2 hook and working from right side, work 1 s c in each st on back neck edge, 30 s c on front neck edge, 3 s c at corner, 1 s c in every 2nd row of left front to lower edge, work s c on lower edge, keeping work flat, continue s c on right front and neck edge to correspond. Fasten off.
With size 2 hook and working from right side, work a row of s c on lower edge of each sleeve. Fasten off.
Steam, see directions page 47.
Sew slide fastener to front edges from beginning of neck shaping to last increase of rounded corners.

PICOT BRAID—With size 4 hook and Floraltone, ch 16 inches for cuff. Work 1 s c in 2nd st from hook and in each st on chain. Ch 1, turn.
Next row (right side)—* Work 1 s c in each of 3 sts, ch 3 for picot, 1 slip st in top of last s c before ch 3, repeat from * to end of row. Fasten off. Make a

(*continued on page* 33)

"SPECTATOR"

ANGORA FOR YOUR SPORTSWEAR IS SMARTEST

☆

No. 2643

Size 16

YARNS—Fleisher's Sport Angora, 15 balls Color A (Blouse 4 balls, Skirt 11 balls), 3 balls each Colors B and C.
Dress made in one color, 19 balls (Blouse 8 balls, Skirt 11 balls).
Dress made in two colors, 17 balls Color A (Blouse 6 balls, Skirt 11 balls); 3 balls Color B (for contrasting yoke).

NEEDLES—1 Fleisher's "Comfy-Grip" Sure-Fit 27-inch Circular Steel, Art. 896, Size 2.
1 pair Fleisher's 14-inch Steel, Art. 499, Size 1.
1 Fleisher's Steel Crochet Hook, Art. 300, Size 1.

TRIMMINGS—Talon Slide Fastener Style 101, 18 inches long.

IMPORTANT—Check your gauge first, see page 46.

BLOUSE

MEASUREMENTS FOR FINISHED GARMENT

Bust 35 inches.
Width across back at underarm 16½ inches.
Length from lower edge to underarm 11¼ inches.
Length from lower edge to back of neck 20 inches.
Sleeves—Width below underarm 12¾ inches.
Length from lower edge to underarm 5¾ inches.

GAUGE (circular needle):
17 sts = 2 inches 11 rows = 1 inch
Blouse is worked back and forth.

YOKE—Using circular needle and color B, cast on 58 sts loosely for neck edge. P 1 row.
2nd row—Increase 1 st in first st (k in front, then back of st), k 1 (left front), * increase 1 st in next st, k 1 (seam st), increase 1 st in next st, k 4 (sleeve), increase 1 st in next st, k 1 (seam st), increase 1 st in next st *, k 34 (back), repeat between *'s once, k 1 (right front), increase 1 st in last st (68 sts).
3rd row—Purl.
4th row—Increase 1 st in first st, k 3, * increase 1 st in next st, k 1, increase 1 st in next st, k 6, increase 1 st in next st, k 1, increase 1 st in next st *, k 36, repeat between *'s once, k 3, increase 1 st in last st (78 sts).
Continue in this way to increase 10 sts every k row 9 times more (increasing 1 st each side of the 4 seam sts and 1 st at beginning and end of row); having 2 sts more in each front, each sleeve and in back after each k row (168 sts). Cast on 13 sts at end of last row, p across all sts, cast on 13 sts (194 sts).
Next row—K, increasing 1 st each side of seam sts as before, *do not increase at front edges* (202 sts).
Continue increasing 8 sts every 2nd row, keeping front edges even until there are 77 rows in all from back of neck (410 sts). Break B; join color A.
Continue yoke as before until there are 18 rows of A, ending with a p row (482 sts). This completes yoke. Leave yarn at left front edge for working body.
Slip 75 sts of left front (including seam st), 100 sts of left sleeve and 132 sts of back (including 1 seam st at each side) on separate strands of yarn, leave next 100 sts on needle for right sleeve and slip remaining 75 sts of right front on a strand of yarn.

RIGHT SLEEVE—Join another ball of A at back of sleeve, cast on 4 sts for underarm; k across row, cast on 4 sts (108 sts).
Continue stockinette st (p 1 row, k 1 row) until 4¾ inches below underarm, ending with a p row (entire A stripe should measure 6½ inches).
Decrease row—* K 1, k 2 tog, repeat from * across row (72 sts). Break A; join color C. Change to straight needles and p 1 row.
Cuff—K 2, p 2 and repeat across row. Repeat this row until cuff measures 1 inch (ribbing). Bind off, knitting the k sts and purling the p sts. Sew sleeve seam.

LEFT SLEEVE—Take up 100 sts from strand of yarn and work to correspond to right sleeve.

BODY—Take up 75 sts of left front on circular needle, using A, k these sts; * pick up and k 8 sts on underarm sts of sleeve *; take up 132 sts of back on left hand end of needle and k these sts; repeat between *'s once; take up and k the 75 sts of right front (298 sts). Work stockinette st for 4¾ inches, ending with a p row (entire A stripe should measure 6½ inches).
Decrease row—K 19, * k 2 tog, k 4, repeat from * 43 times, k 15 (254 sts).
Break A; join C. P 1 row.
Work ribbing as on cuff for 2 inches.
Change to straight needles and work until ribbing measures 4 inches from last row of A.
Change back to circular needle and work until ribbing measures 6½ inches from last row of A. Bind off as before.

COLLAR—Using straight needles and color B, cast on 170 sts for neck edge.
First row (right side)—* K 2, p 2, repeat from *, ending row k 2.
2nd row—* P 2, k 2, repeat from *, ending row p 2. Repeat these 2 rows until collar measures 1½ inches. Change to circular needle and continue ribbing until collar measures 3 inches from neck edge. Bind off as before.

FINISHING—Join B on left side of collar at neck edge. Working from right side, work 1 s c in every 2nd row on end of collar. Fasten off. Work s c on other end of collar to correspond.
Join B on left front at neck edge. Working from right side, work 1 s c in every 2nd row of B on front edge; break B, join A and work 1 s c in every 2nd row of A; break A, join C and work 1 s c in every 2nd row of C to lower edge. Fasten off. Join C at lower right front edge and work s c to correspond to left front edge. With right side of collar to wrong side of blouse and ends of collar at front edges, sew neck edge of collar to neck edge of blouse, holding neck edge in to 14½ inches.
Steam lightly, see directions page 47.
Sew slide fastener to front edges of blouse from lower edge to neck edge, with stripes of colors matching.

(*continued on page* 33)

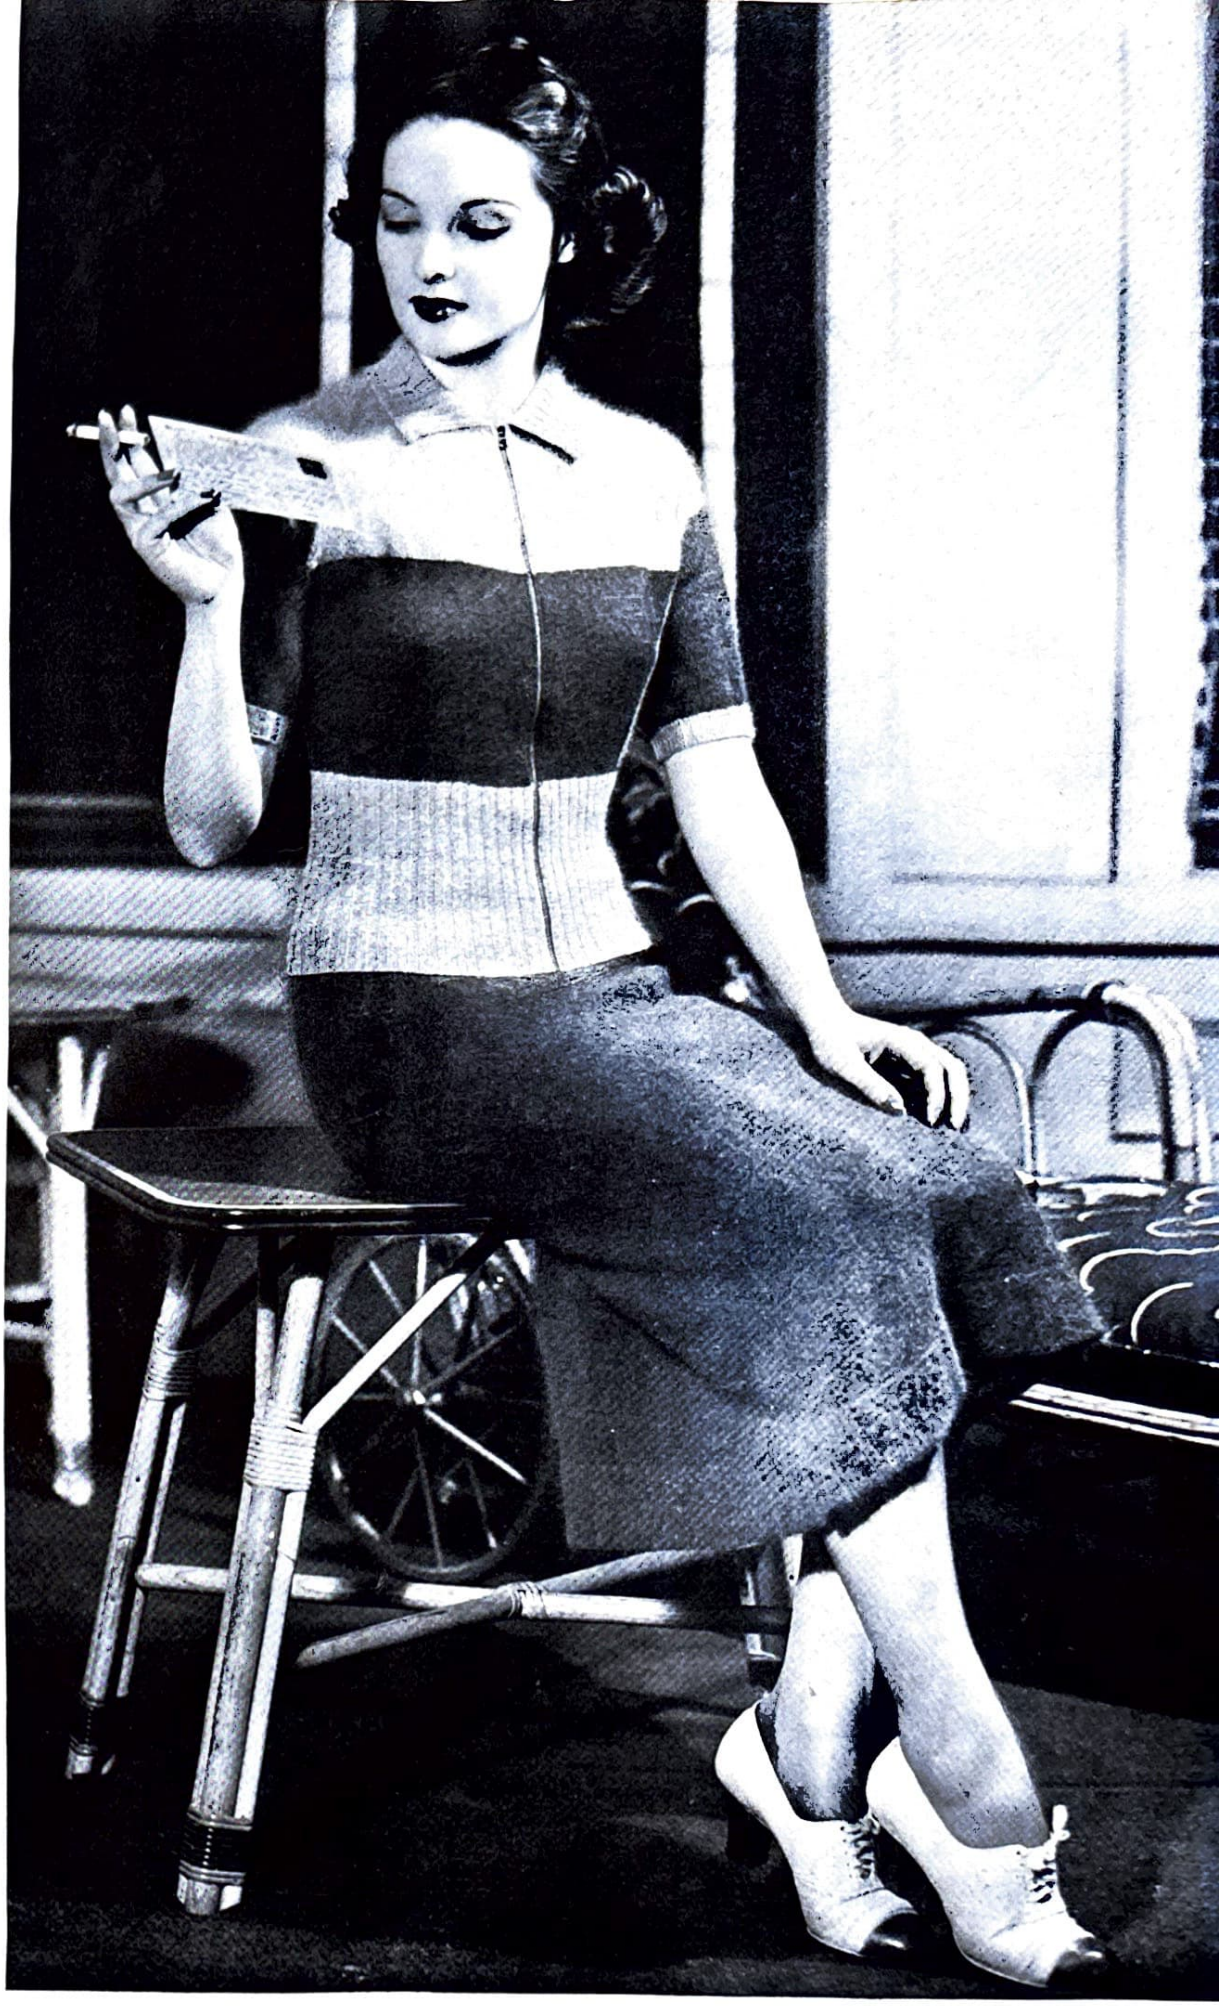

"Spectator"
No. 2643

☆

"Cruiser
No. 2633

☆

"CRUISER"

EXACTLY THE "RIGHT" FROCK FOR LAND OR SEA

☆

No. 2633

Size 16

YARNS—Fleisher's Magic Flake†, 18 balls (Blouse 7 balls, Skirt 11 balls).
Fleisher's Angel Crepe†, 2 balls (Trimming).
NEEDLES—1 Fleisher's "Comfy-Grip" Sure-Fit 27-inch Circular Steel, Art. 896, Size 2.
1 Fleisher's Steel Crochet Hook, Art. 300, Size 2.
TRIMMINGS—7 Buttons 5/8 inch diameter.
IMPORTANT—Check your gauge first, see page 46.

BLOUSE

MEASUREMENTS FOR FINISHED GARMENT
Bust 35 inches.
Width across back at underarm (including button band) 16 inches.
Width across back at shoulders (including button band) 13 inches.
Length from lower edge to underarm 14½ inches.
Sleeves—Width below underarm 13 inches.
Length from lower edge of band to underarm 4½ inches.

GAUGE: 17 sts = 2 inches 11 rows = 1 inch

Entire Blouse is worked back and forth on circular needle. Front and backs are started at shoulders and worked down to lower edge in order to make box pleats at waistline.

LEFT HALF OF BACK—Using Magic Flake, cast on 21 sts for neck edge.
First row—P, casting on 5 sts at end of row for shoulder shaping (26 sts).
2nd row (right side)—K across row, increasing 1 st in last st (27 sts). Repeat these 2 rows 4 times more (51 sts).
Armhole—Continuing stockinette st (p 1 row, k 1 row) work even until 5¾ inches from neck edge, ending with a p row at armhole edge. Increase 1 st at beginning of next row (a k row) and repeat increase at armhole edge every 2nd row 6 times more, keeping center back edge even (58 sts). P 1 row after 7th increase and cast on 6 sts at end of row for underarm (64 sts). Work even until 4½ inches from underarm, ending with a p row. Begin box pleat.
First row—Starting at underarm edge k 25, p 17 for box pleat, k 22.
2nd row—P 22, k 17, p 25. Repeat these 2 rows until pleat measures 3 inches, ending on right side.
Next row—P 22, bind off 17 sts of pleat, p to end.
Next row—K across 47 sts. Work even in stockinette st for 9 rows more.
Increase row—K 7, * cast on 1 st by making a loop on right hand end of needle, k 11; repeat from * across row, ending last repeat k 7 (51 sts).
Keeping center back edge even increase 1 st at underarm edge every 6th row 6 times (57 sts). Work even until 14½ inches from underarm, ending with a p row. Bind off.

RIGHT HALF OF BACK—Cast on 21 sts for neck edge.
First row—K, casting on 5 sts at end of row for shoulder shaping (26 sts).
2nd row—P across row, increasing 1 st in last st (27 sts).
Repeat these 2 rows 4 times. Continue to correspond to left half of back increasing for armhole edge at *end* of k rows. When 4½ inches from underarm, ending with a p row work as follows:
First row of box pleat—Starting at center back edge, k 22, p 17, k 25. Finish to correspond to left half of back.

FRONT—Using Magic Flake cast on 5 sts for left shoulder edge.
First row—Purl.
2nd row (right side)—K, casting on 5 sts at end of row for shoulder shaping (10 sts).
3rd row—Purl. Repeat last 2 rows 3 times more (25 sts).
10th row—Knit.
11th row—P, casting on 2 sts at end of row for neck shaping (27 sts). Repeat last 2 rows 13 times more (53 sts). K 1 row.
Break yarn and slip sts on holder.
Cast on 5 sts for right shoulder.
First row—Knit.
2nd row—P, casting on 5 sts at end of row (10 sts).
3rd row—Knit. Repeat last 2 rows 3 times more (25 sts).
10th row—Purl.
11th row—K, casting on 2 sts at end of row for neck shaping (27 sts). Repeat last 2 rows 13 times more (53 sts). P 1 row.
Next row—K across 53 sts, cast on 14 sts for front neck edge; take up 53 sts of left side on left hand end of needle and working from right (k) side, join and k across these sts (120 sts). Work even in stockinette st until 2 inches from neck edge at center (5½ inches from beginning of shoulder), ending with a p row. Increase 1 st at each side of next row and repeat increases every 2nd row 9 times more. Cast on 10 sts at end of each of next 2 rows for underarm (160 sts). Work even until 4½ inches from underarm, ending with a p row. Begin box pleats.
First row—K 34, p 17 for pleat, k 58, p 17 for pleat, k 34.
2nd row—P 34, k 17, p 58, k 17, p 34. Repeat these 2 rows until pleats measure 3 inches, ending on right side.
Next row—P 34, bind off 17 sts, p until 58 sts from bind-off, bind off 17 sts, p to end.
Next row—K across 126 sts. Work stockinette st even for 9 rows more.
Increase row—K 10, * cast on 1 st, k 15; repeat from * across row, ending last repeat k 11 (134 sts). Increase 1 st each side every 6th row 6 times (146 sts). Work even until 14½ inches from underarm, ending with a p row. Bind off.

SLEEVES—Using Magic Flake cast on 80 sts for lower edge. Work stockinette st (p 1 row, k 1 row) for 9 rows.
Increase row—K 2, * cast on 1 st, k 6; repeat from * across row (93 sts). P 1 row. Increase 1 st each side of next row and repeat increases every 4th row 5 times more; then every 2nd row 3 times (111 sts).
Bind off 8 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row (a

(continued on page 34)

"SORORITY"

A FLATTERING FITTED MODEL OF EXTREME CHIC

☆

No. 2636

Size 16

YARNS—Fleisher's Cheviot Zephyr†, 8 balls (Blouse 3 balls, Skirt 5 balls).

NEEDLES—1 Fleisher's "Comfy-Grip" Sure-Fit 27-inch Circular Steel, Art. 896, Size 2.
1 Fleisher's Steel Crochet Hook, Art. 300, Size 3.

IMPORTANT—Check your gauge first, see page 46.

BLOUSE

MEASUREMENTS FOR BLOCKED GARMENT

Bust 35 inches.
Width across back at underarm 16¼ inches.
Width across back at shoulders 12½ inches.
Length from lower edge to underarm 12 inches.
Sleeves—Width at underarm 13½ inches.
Length from lower edge to underarm 4¾ inches.

GAUGE (after blocking):
Stockinette St—8 sts = 1 inch 11 rows = 1 inch
1 Pattern (21 sts) = 2¼ inches

Pattern stripe is a multiple of 21 sts, the number of p sts between patterns is increased and decreased for shaping.

Entire blouse is worked back and forth on circular needle.

BACK—Cast on 129 sts for lower edge.

Pattern—First row (right side)—P 2, * p 3, k 2 tog, k 3, increase 1 st in next st (k in front, then back of st), k 2, increase 1 st in next st, k 4, slip, k and pass (always slip as to k), p 8, repeat from *, ending last repeat p 5 (21 sts in each of the five pattern stripes; the 5 p sts at end of repeat is reverse stockinette st stripe between pattern stripes).

2nd row—K 5, * p 15, k 11; repeat from *, ending last repeat k 5.

3rd row—P 2, * p 2, k 2 tog, k 3, increase 1 st in next st, k 4, increase 1 st in next st, k 4, slip, k and pass, p 7; repeat from *, ending last repeat p 4.

4th row—K 4, * p 17, k 9; repeat from *, ending last repeat k 4.

5th row—P 2, * p 1, k 2 tog, k 3, increase 1 st in next st, k 6, increase 1 st in next st, k 4, slip, k and pass, p 6; repeat from *, ending last repeat p 3.

6th row—K 3, * p 19, k 7; repeat from *, ending last repeat k 3.

7th row—P 2, * k 2 tog, k 3, increase 1 st in next st, k 8, increase 1 st in next st, k 4, slip, k and pass, p 5; repeat from *, ending last repeat p 2.

8th row—K 2, * p 21, k 5; repeat from *, ending last repeat k 2. These 8 rows complete pattern and are repeated for entire blouse. Work even until 1 inch from lower edge, ending with 3rd pattern row.

First decrease (4th pattern) row—K 2 tog, k 2, * p 17, k 4, k 2 tog, k 3; repeat from *, ending last repeat k 2, k 2 tog (123 sts). Work even with 1 st less at each side and in each reverse stockinette st stripe until 2½ inches from lower edge, ending with 3rd pattern row.

2nd decrease row—K 2 tog, k 1, * p 17, k 2, k 2 tog twice, k 2; repeat from *, ending last repeat k 1, k 2 tog (113 sts). Work even with 1 st less at each side and 2 sts less in each reverse stockinette st stripe until 5½ inches, ending with 3rd pattern row.

First increase row—Increase 1 st in first st, k 1, * p 17, k 2, increase 1 st in each of next 2 sts, k 2; repeat from *, ending last repeat k 1, increase in last st (123 sts).

Work even until 6¾ inches, ending with 3rd pattern row.

2nd increase row—Increase in first st, k 2, * p 17, k 3, increase in each of next 2 sts, k 3, repeat from *, ending last repeat k 2, increase in last st (133 sts).

Work even until 7½ inches from lower edge, ending with 3rd pattern row.

3rd increase row—K 4, * p 17, k 5, increase in next st, k 4, repeat from *, ending p 17, k 4 (137 sts).

Continue pattern (with 7 sts in stripes between patterns), increasing 1 st each side every inch 4 times (145 sts). Work even until 12 inches from lower edge, ending with 4th pattern row.

Armholes—Bind off 7 sts at beginning of next row for right underarm, k until 12 sts on right end of needle, increase in next st, continue pattern to end. Bind off 7 sts at beginning of next row for left underarm, continue pattern to end (131 sts).

3rd row—K 2 tog twice, k 9, increase in next st, continue pattern to within 14 sts of end, k 10, k 2 tog twice (127 sts).

4th row—Follow pattern (knitting the k sts and purling the p sts).

5th row—K 2 tog twice, k 4, increase 1 st in next st, continue pattern to within 9 sts of end, k 5, k 2 tog twice (123 sts).

6th row—Follow pattern.

7th row—K 2 tog twice, k 3, increase in next st, continue pattern to within 8 sts of end, k 4, k 2 tog twice (119 sts).

8th row—Follow pattern.

9th row—K 2 tog twice, k 2, increase in next st, continue pattern to within 7 sts of end, k 3, k 2 tog twice (115 sts).

10th row—Follow pattern.

11th row—K 2 tog twice, k 1, increase in next st, continue pattern to within 6 sts of end, k 2, k 2 tog twice (111 sts).

12th row—Follow pattern.

Next row—Increase 1 st in first st, k 4, slip, k and pass, p 13, continue pattern, ending row k last st. Beginning and ending rows with center of pattern, work even until 6½ inches above underarm, ending with 4th pattern row.

Shoulders—Bind off 5 sts (working the 2 center sts together) at beginning of each of next 8 rows, 4 sts at beginning of each of 4 rows (28 bound-off sts for each shoulder, 4 sts decreased in binding off).

Bind off remaining 55 sts for back of neck.

POCKET LININGS—Cast on 22 sts for lower edge.

First row (right side)—P 3, k 16, p 3.

2nd row—K 3, p 16, k 3.

Repeat these 2 rows until 17 rows from lower edge.

Next row—K 3, p 1, * increase 1 st in next st, p 2; repeat from * 4 times, k 3 (27 sts). Slip sts to a strand of yarn. Make 3 more linings in same way.

(*continued on page* 35)

"Sorority"
No. 2636

☆

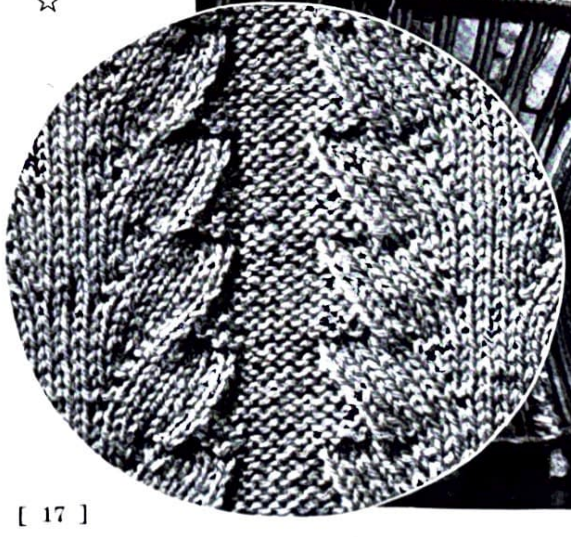

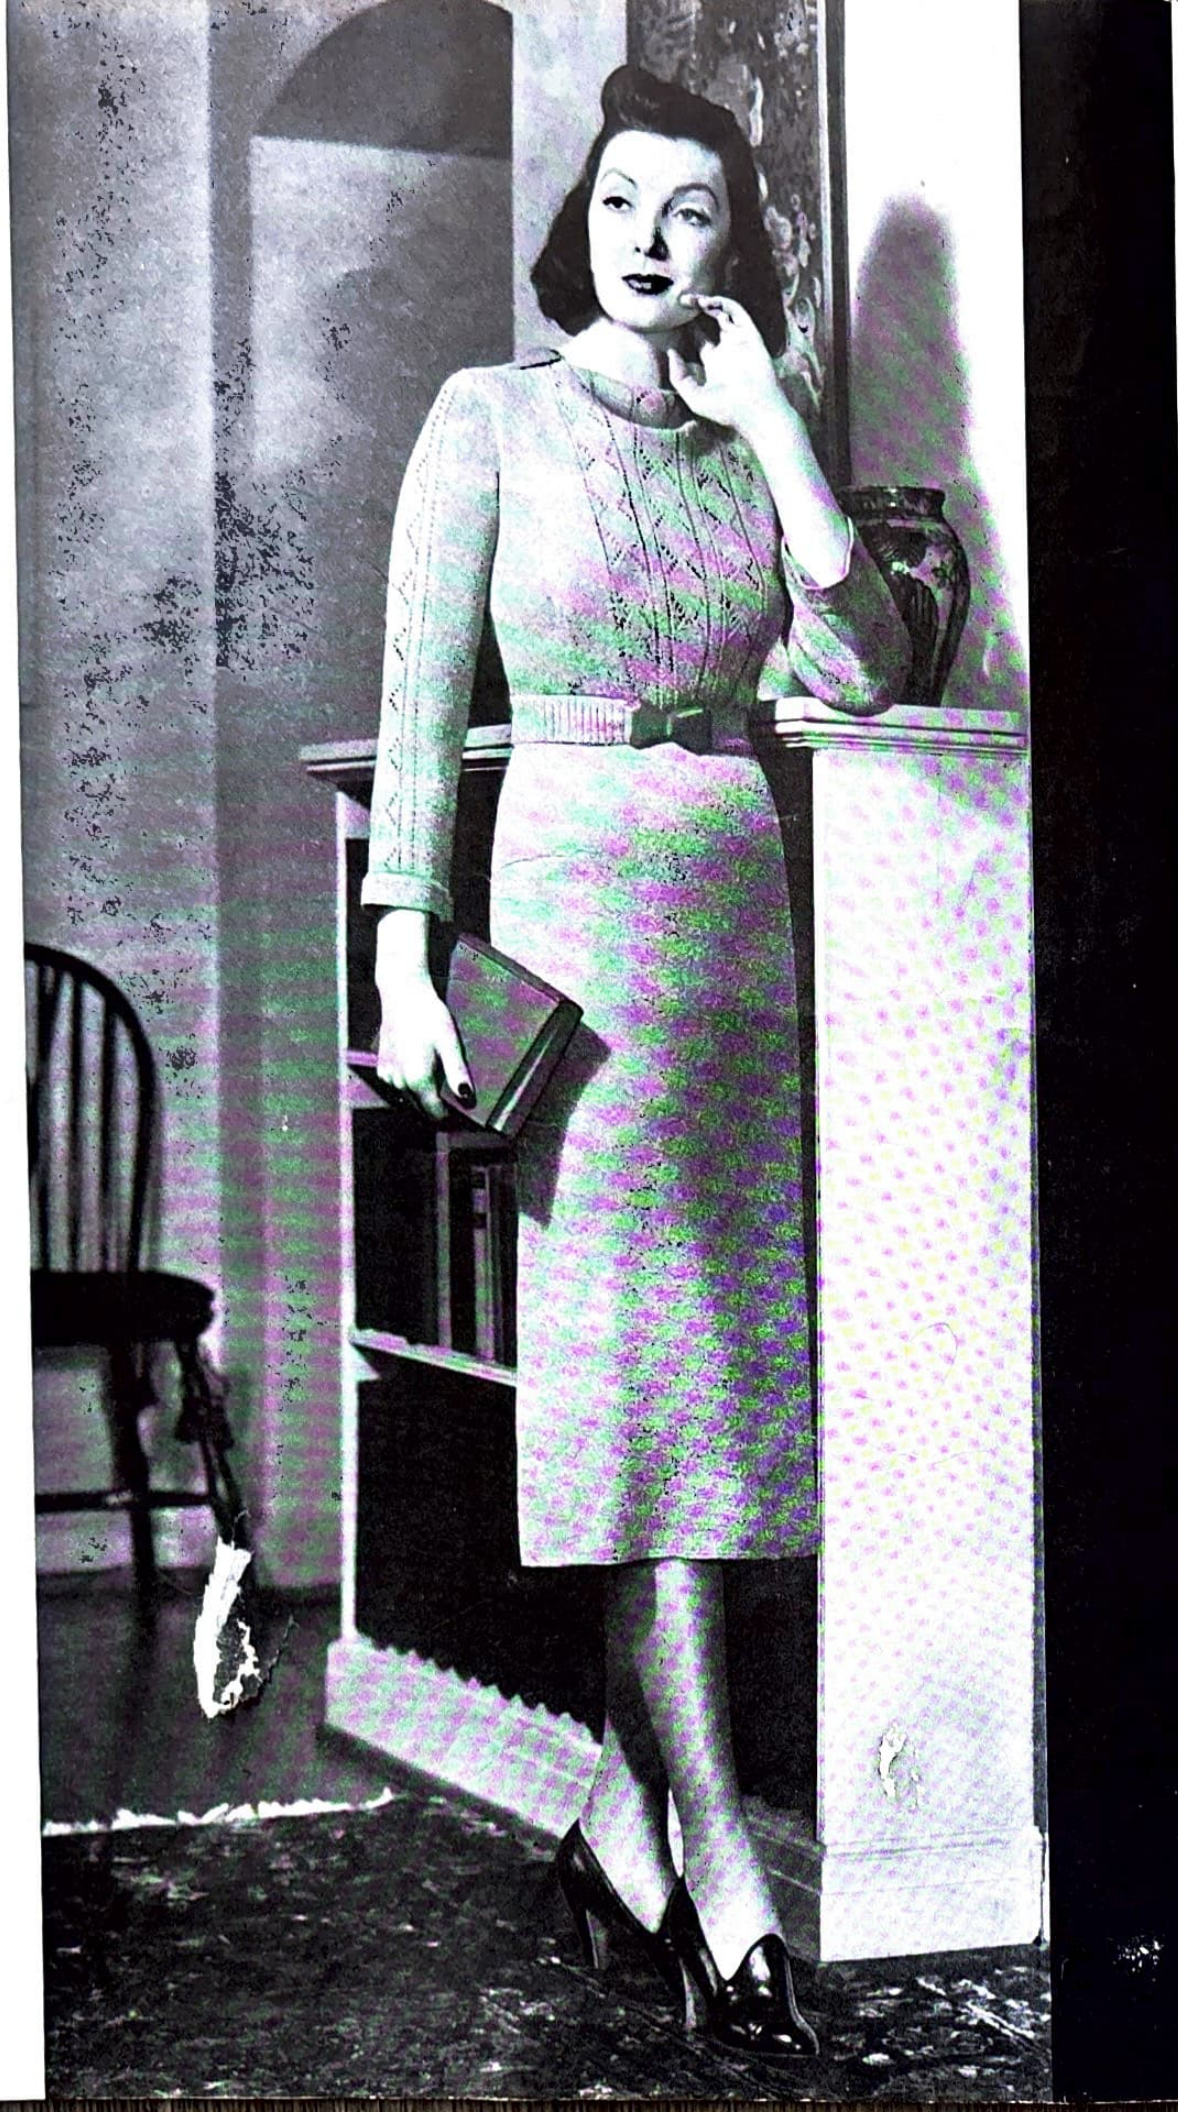

"Sunday Night"
No. 2630

☆

"SUNDAY NIGHT"

A SMARTLY SIMPLE FROCK FOR ALL OCCASIONS

☆

No. 2630

Size 16

Any changes needed for Sizes 38 and 42 will be found in parentheses.

YARNS—Fleisher's Angel Crepe†, 22 (Size 38-24; Size 42-26) balls.

NEEDLES—1 Fleisher's "Comfy-Grip" Sure-Fit 27-inch Circular Steel, Art. 896, Size 2.
1 Fleisher's Steel Crochet Hook, Art. 300, Size 2.

TRIMMINGS—2 Clips 2½ inches long.
Clasp Belt Buckle 1⅞ inches wide.

IMPORTANT—Check your gauge first, see page 46.

WAIST MEASUREMENTS FOR FINISHED GARMENT

Bust 35 (Size 38-39; Size 42-43) inches.
Width across back at underarm 16 (Size 38-18; Size 42-20) inches.
Width across back at shoulders 13 (Size 38-14; Size 42-15) inches.
Length from waistline to underarm 8 inches.
Sleeves—Width below underarm 12½ (Size 38-13½; Size 42-14½) inches.
Length from lower edge to underarm with cuff turned back 15¾ inches.

GAUGE: 17 sts = 2 inches 11 rows = 1 inch

Entire waist is worked back and forth on circular needle.

BACK—Cast on 120 (size 38-137; size 42-154) sts for lower edge.

Openwork Darts—First row—Purl.

2nd row (right side)—K 30 (size 38-34; size 42-38), * slip, k and pass, yarn over needle, k 4 (size 38-6; size 42-8), dart sts; over, k 2 tog *, k 44 (size 38-49; size 42-54), repeat between *'s once, k 30 (size 38-34; size 42-38). Repeat these 2 rows 4 times more. P 1 row.

12th row—increase row—K 32 (size 38-36; size 42-40); * over, k 4 (size 38-6; size 42-8), over *, k 48 (size 38-53; size 42-58); repeat between *'s once, k to end of row, 124 (size 38-141; size 42-158) sts.

13th row—Purl.

14th row—K 31 (size 38-35; size 42-39), repeat between *'s of 2nd row once, k 46 (size 38-51; size 42-56), repeat between *'s of 2nd row once, k to end of row. Repeat last 2 rows 4 times more. P 1 row.

24th row—2nd increase row—K 33 (size 38-37; size 42-41), repeat between *'s of 12th row once, k 50 (size 38-55; size 42-60), repeat between *'s of 12th row once, k to end of row, 128 (size 38-145; size 42-162) sts. Continue in this way to increase 4 sts every 12th row twice more, having 2 sts more in center section between darts and 1 st more at each side after each increase row; always keeping same number of dart sts between openwork holes of darts. There will be 136 (size 38-153; size 42-170) sts after 4th increase row. Discontinue openwork holes. Work even in stockinette st, p 1 row, k 1 row, until back measures 8 inches from lower edge.

Armholes—Bind off 6 (size 38-8; size 42-10) sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 7 (size 38-9; size 42-11) times, 110 (size 38-119; size 42-128) sts. Work even until 5½ (size 38-5¾; size 42-6) inches above underarm. Decrease 1 st each side of next row and repeat decreases every 2nd row 5 times more, 98 (size 38-107; size 42-116) sts.

Shoulders—On size 16 bind off 4 sts at beginning of each of next 12 rows. On size 38 bind off 2 sts at beginning of each of next 2 rows, then 4 sts at beginning of next 12 rows. On size 42 bind off 4 sts at beginning of each of next 14 rows, 24 (size 38-26; size 42-28) sts bound off for each shoulder. Bind off remaining 50 (size 38-55; size 42-60) sts for back of neck.

FRONT—Cast on 137 (size 38-155; size 42-171) sts for lower edge.

Openwork Panel Darts—First row—Purl.

2nd row—K 54 (size 38-61; size 42-67), over, k 2 tog, k 3, slip, k and pass, over, * k 4 (size 38-6; size 42-8) dart sts, over, k 2 tog, k 3, slip, k and pass, over, repeat from * once, k 54 (size 38-61; size 42-67). Repeat these 2 rows twice more. P 1 row.

8th row—increase row—K 54 (size 38-61; size 42-67), over, k 7, over, * k 4 (size 38-6; size 42-8), over, k 7, over, repeat from * once, k to end of row, 143 (size 38-161; size 42-177) sts.

9th row—Purl.

10th row—K 54 (size 38-61; size 42-67), over, k 2 tog, k 5, slip, k and pass, over, * k 4 (size 38-6; size 42-8), over, k 2 tog, k 5, slip, k and pass, over, repeat from * once, k to end of row. Repeat last 2 rows twice more. P 1 row.

16th row—2nd increase row—K 54 (size 38-61; size 42-67), over, k 9, over, * k 4 (size 38-6; size 42-8), over, k 9, over, repeat from * once, k to end of row, 149 (size 38-167; size 42-183) sts. Continue in this way to increase 6 sts every 8th row twice more, always keeping 54 (size 38-61; size 42-67) sts at each side of panel and 4 (size 38-6; size 42-8) sts in each dart st section. There will be 2 sts more after each increase row, in each of the other 3 sections between openwork stripes, 161 (size 38-179; size 42-195) sts.

Openwork Panel Pattern—**First and all odd numbered rows**—Purl.

2nd row—K 54 (size 38-61; size 42-67), over, k 2 tog, k 11, slip, k and pass, over, * k 4 (size 38-6; size 42-8), over, k 2 tog, k 11, slip, k and pass, over, repeat from * once, k to end of row. Repeat these 2 rows 4 times more. P 1 row.

12th row—K 54 (size 38-61; size 42-67), * over, k 2 tog, over, k 2 tog, k 1, slip, k and pass, over, slip, k and pass, over, k 4 (size 38-6; size 42-8), repeat from * twice, ending last repeat k 54 (size 38-61; size 42-67).

14th row—K 54 (size 38-61; size 42-67), * over, k 2 tog, k 1, over, k 2 tog, k 5, slip, k and pass, over, k 1, slip, k and pass, over, k 4 (size 38-6; size 42-8), repeat from * twice, ending last repeat k 54 (size 38-61; size 42-67).

16th row—K 54 (size 38-61; size 42-67), * over, k 2 tog, k 2, over, k 2 tog, k 3, slip, k and pass, over,

(*continued on page* 36)

"CAMPUS"

SOFT AND WARM FOR SPORTS OR DRESS WEAR

☆

No. 2642

Size 16

YARNS—Fleisher's Sport Angora, 7 balls.

NEEDLES—1 pair Fleisher's 14-inch White, Art. 846, Size 3.
1 Fleisher's Steel Crochet Hook, Art. 300, Size 1.

TRIMMINGS—1 Small Clip.
Leather Belt ½ inch wide.

IMPORTANT—Check your gauge first, see page 46.

MEASUREMENTS FOR FINISHED GARMENT
Bust 35 inches.
Width across back at underarm 16½ inches.
Width across back at shoulders 13 inches.
Length from lower edge to underarm 14½ inches.
Length from lower edge to back neck edge of yoke 22½ inches.
Sleeves—Width below underarm 12¾ inches.
Length from lower edge of crocheted border to underarm 5½ inches.

GAUGE: 15 sts = 2 inches 10 rows = 1 inch
Pattern is a multiple of 14.

BACK—Cast on 112 sts for lower edge.

Pattern—Work stockinette st (k 1 row, p 1 row) for 9 rows, ending with a k row.

10th row (right side)—P 13, † p 2 tog, k 2; wrap yarn around needle from back to front, p 10 †; repeat between †'s, ending last repeat p 11 instead of 10.

11th row—K 12, * p 2, k 12, repeat from *, ending last repeat k 14 instead of 12.

12th row—P 12, repeat between †'s of 10th row, ending last repeat p 12 instead of 10.

13th row—K 13, * p 2, k 12, repeat from *, ending last repeat k 13 instead of 12.

14th row—P 11, repeat between †'s, ending last repeat p 13.

15th row—K 14, * p 2, k 12, repeat from * across row.

16th row—P 10, repeat between †'s, ending last repeat p 14.

17th row—K 15, * p 2, k 12, repeat from *, ending last repeat k 11.

18th row—P 11, ** yarn over needle, k 2, p 2 tog, p 10 **; repeat between **'s, ending last repeat p 13.

19th row—Same as 15th row.

20th row—P 12, repeat between **'s of 18th row, ending last repeat p 12.

21st row—Same as 13th row.

22nd row—P 13, repeat between **'s, ending last repeat p 11.

23rd row—Same as 11th row.

24th row—P 14, repeat between **'s across row.

Work stockinette st for 9 rows.

34th row—P 20, repeat between †'s of 10th row, ending last repeat p 18.

35th row—K 19, * p 2, k 12, repeat from *, ending last repeat k 21.

36th row—P 19, repeat between †'s, ending last repeat p 19.

37th row—K 20, * p 2, k 12, repeat from *, ending last repeat k 20.

38th row—P 18, repeat between †'s, ending last repeat p 20.

39th row—K 21, * p 2, k 12, repeat from *, ending last repeat k 19.

40th row—P 17, repeat between †'s, ending last repeat p 21.

41st row—K 22, * p 2, k 12, repeat from *, ending last repeat k 18.

42nd row—P 18, repeat between **'s of 18th row, ending last repeat p 20.

43rd row—Same as 39th row.

44th row—P 19, repeat between **'s, ending last repeat p 19.

45th row—Same as 37th row.

46th row—P 20, repeat between **'s, ending last repeat p 18.

47th row—Same as 35th row.

48th row—P 21, repeat between **'s, ending last repeat p 17.

These 48 rows complete pattern which is repeated for entire back. Be careful to keep pattern while decreasing and increasing.

Decrease 1 st each side of next row and repeat decreases every 4th row 4 times more (102 sts at waistline).

Increase 1 st each side every 4th row 6 times, then every 6th row 5 times, working increased sts in stockinette st (124 sts). Work even until 14½ inches from lower edge, ending with 48th pattern row.

Armholes—Bind off 7 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 6 times (98 sts). Work even until 5 inches above underarm, ending with 2nd pattern row (a p row). Bind off.

FRONT—Cast on 126 sts for lower edge. Work same as back. There will be 116 sts at waistline, 138 sts below underarm and 112 sts after shaping armholes.

RIGHT SLEEVE—Cast on 84 sts for lower edge of sleeve. Pattern is worked as on back. Work 8 rows even. Increase 1 st each side of next row and repeat increases every 6th row 5 times more (96 sts).

Work even until 4¾ inches from lower edge, ending with 48th pattern row.

Bind off 7 sts at beginning of each of next 2 rows for underarm.

Decrease 1 st each side every 2nd row 6 times (70 sts).

Work even until 4¾ inches above underarm, ending with 48th pattern row. This completes pattern.

Decrease row (wrong side)—K 2 tog continuously across row (35 sts).

Next row—Bind off 6 sts, p across row binding off last 6 sts. Break yarn.

Right Half of Yoke—Join yarn in last st worked. P 1 row, k 1 row, p 1 row (reversing stockinette st of sleeve).

First increase row (right side)—K 11, over (an increase), k 1 (seam st), over, k 11 (25 sts).

P 1 row, k 1 row, p 1 row.

2nd increase row—K 12, over, k 1 (seam st), over, k 12 (27 sts). Continue in this way, increasing 1 st each side of seam st every 4th row 10 times more (47 sts). P 1 row.

(continued on page 37)

"Campus"
No. 2642

☆

"Ping Pong"
No. 2644

☆

"PING PONG"

ATTRACTIVE FOR SPORTS—IDEAL FOR TRAVELING

☆

No. 2644
Size 16

YARNS—Fleisher's Bretton Tweed†, 22 balls.
NEEDLES—Fleisher's "Comfy-Grip" Sure-Fit 27-inch Circular Steel, Art. 896, 1 each Sizes 3 and 5.
1 Fleisher's Steel Crochet Hook, Art. 300, Size 2.
TRIMMINGS—11 Buttons ¾ inch diameter.
Leather Belt 1½ inches wide.
IMPORTANT—Check your gauge first, see page 46.

WAIST

MEASUREMENTS FOR FINISHED GARMENT
Bust 35½ inches.
Width across back at underarm 17 inches.
Width across back at shoulders 12½ inches.
Width of each front at underarm 9½ inches.
Length from lower edge to underarm 8 inches.
Sleeves—Width at underarm 13½ inches.
Length from lower edge to underarm 4 inches.

GAUGE: 13 sts = 2 inches 10 rows = 1 inch

Waist is worked back and forth on size 3 circular needle.

BACK—Cast on 88 sts for lower edge. P 1 row. K 1 row, increasing 1 st in every 10th st 8 times (96 sts). Continue stockinette st (p 1 row, k 1 row), increasing 1 st each side every inch 7 times (110 sts). Work even until 8 inches from lower edge.

Armholes—Bind off 7 sts at beginning of each of next 2 rows. Decrease 1 st each side every 2nd row 7 times (82 sts). Work even until 6½ inches above underarm.

Shoulders—Bind off 5 sts at beginning of each of 4 rows, 4 sts at beginning of each of 8 rows (26 sts for each shoulder). Bind off remaining 30 sts for back of neck.

POCKET LININGS—Cast on 22 sts, work stockinette st for 1½ inches, ending with a k row. Break yarn. Place sts on a strand of yarn. Make 5 more linings in same way.

LEFT FRONT—Cast on 50 sts for lower edge. P 1 row. K 1 row increasing 1 st in every 8th st 6 times (56 sts). Continue in stockinette st increasing 1 st at underarm edge (beginning of k rows) every inch 3 times. Work until 3½ inches from lower edge, ending with a p row.

* **Next row**—K to within 42 sts of front edge, bind off next 22 sts for pocket opening, k to end. Next row p 20, place sts of a pocket lining on left point of needle and working from wrong side, p 22 sts of pocket lining, finish row *. Continue to increase 1 st at underarm edge every inch until 3 inches above pocket. Repeat between *'s once. Work until 7 inches from lower edge, then increase 1 st at underarm edge (63 sts); work until same length as back to underarm, ending with a p row. Shape armhole as for back and join a 3rd pocket 3 inches above last pocket (49 sts). Work until 5½ inches above underarm.

Neck Shaping—Bind off 10 sts at front (straight) edge. Decrease 2 sts at neck edge every 2nd row 3 times, 1 st every 2nd row until 7 inches above underarm. Shape shoulder as for back, continuing to decrease 1 st at neck edge until 13 sts. are decreased in all, then work neck edge even.

RIGHT FRONT—Cast on 50 sts and work as for left front until 1 inch from lower edge, ending with a p row. **Next row**—K 2, bind off next 4 sts for buttonhole, k to end increasing 1 st in last st (underarm edge). Next row cast on 4 sts over bound off sts. Continue to correspond to left front increasing for underarm edge at *end* of k rows and repeating buttonhole at front edge with 1½ inches between each buttonhole, at the same time make pockets 20 sts from front edge and opposite pockets on left front. Discontinue buttonholes when there are 8 altogether. Top buttonhole should be about ½ inch below neck edge. Finish as for left front.

SLEEVES—Cast on 74 sts for lower edge. Work stockinette st increasing 1 st each side every ½ inch 7 times (88 sts). Work until 4 inches from lower edge. Bind off 7 sts at beginning of each of next 2 rows. Decrease 1 st each side every 2nd row 7 times; every 4th row 7 times. On next row worked from right (k) side begin striped pattern; * p 1 row, k 1 row, p 1 row; repeat from * 6 times (forming 4 p stripes of 3 ridges on right side) and at same time decrease 1 st each side every 4th row as before until 36 sts remain. Bind off. Make other sleeve in same way.

COLLAR—Cast on 18 sts. Beginning with a p stripe (right side) work striped pattern as on top of sleeve until there are 29 p stripes (171 rows) from beginning. Bind off.

FINISHING—Sew seams. Sew sleeves to armholes with seam at center underarm, holding in sides of pattern rows at top of sleeves to 1½ inches to form pleats at sides and having extra fullness at top of sleeve at front of shoulder seam. Sew pocket linings to wrong side of waist. With right side of collar to wrong side of waist, center of collar to center back of neck and ends 4 sts from front edges, sew collar to neck edge. Working from right side, work s c across top of pockets, around lower edge of sleeves and lower edge and sides of collar, keeping work flat.

SKIRT

MEASUREMENTS FOR FINISHED GARMENT
Width at lower edge 50 inches around.
Width 5 inches below Waistline 36 inches, including underlap.
Waistline 29 inches, including underlap.
Length 30 inches.

GAUGE:

Size 5 Needle — 6 sts = 1 inch 9 rows = 1 inch
Size 3 Needle — 13 sts = 2 inches 10 rows = 1 inch

Note—At hip it is necessary to have more sts than required for hip measurement, in order to give the effect of pleating.

Using size 5 needle cast on 300 sts for lower edge. Join taking care not to twist sts on needle.

First round—* K 3, p 3; repeat from * around. Mark end of round as an aid in counting. Repeat first round (forming ribbing) until skirt measures 21 inches from lower edge. Change to size 3 needle and continue ribbing until 25 inches from lower edge. Change to stockinette st and divide for center front decreasing as follows: **First decrease row**—* K 3, k 3 tog, k 2, cast on 1 st

(*continued on page* 37)

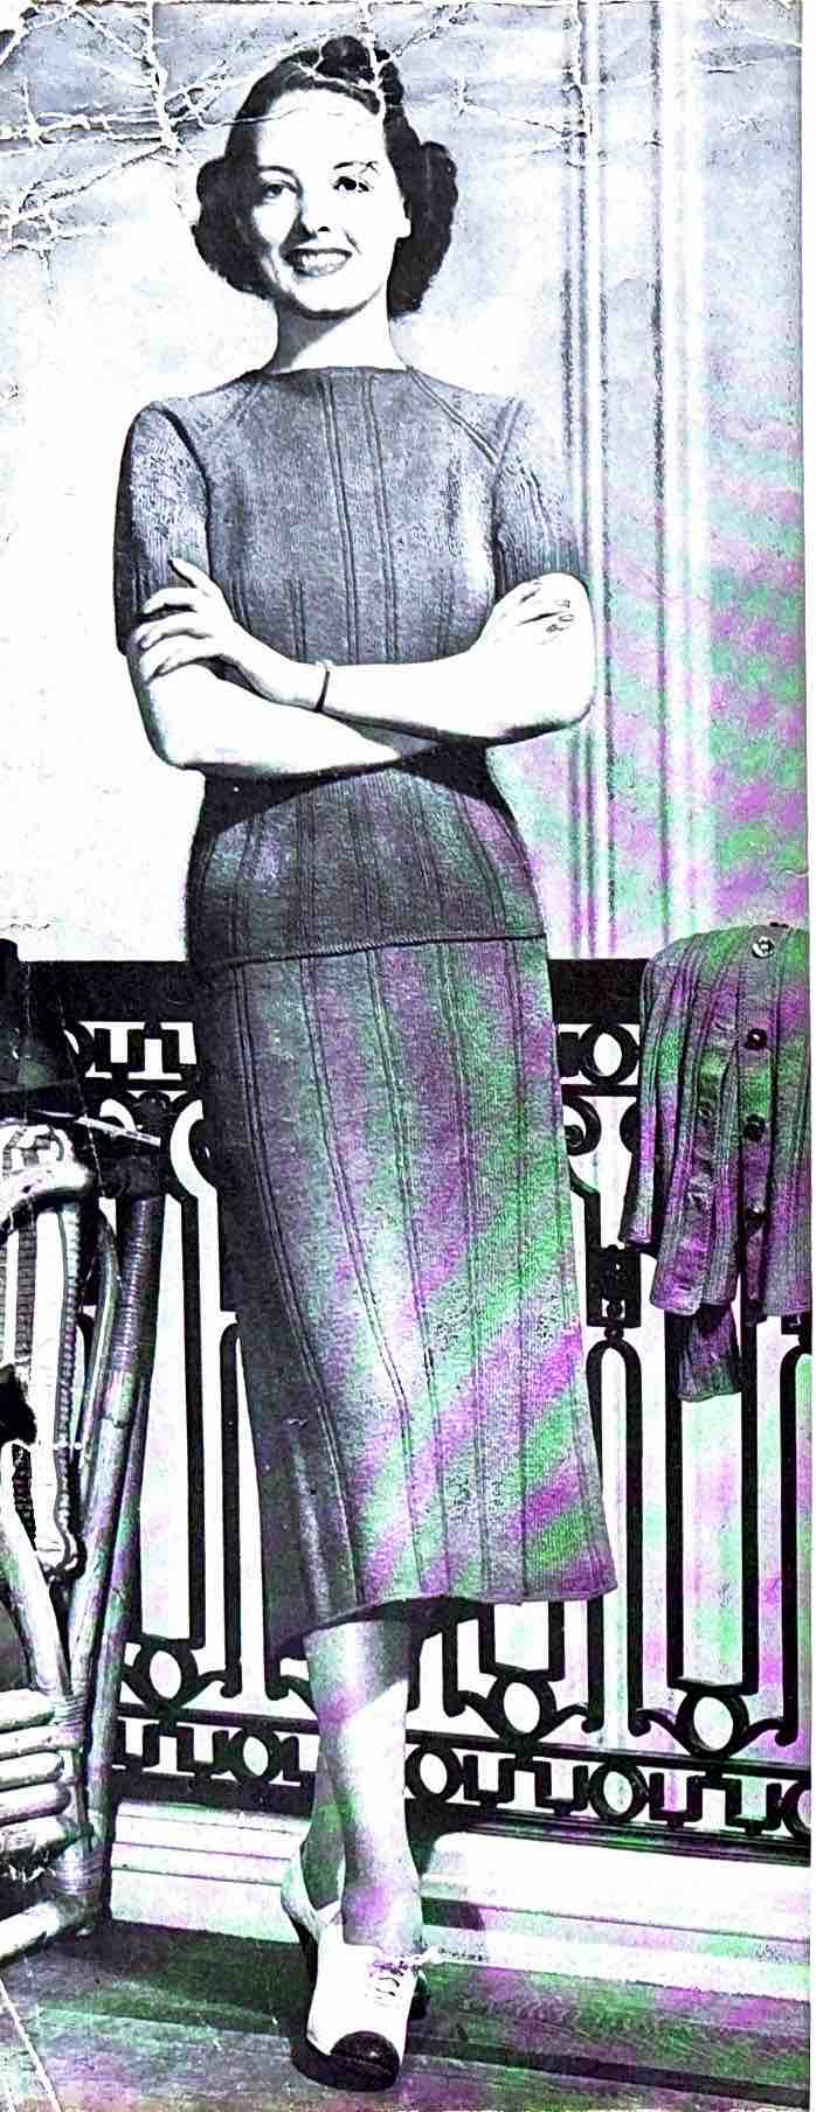

No. 2637

Size 16

YARNS—Fleisher's Cheviot Zephyrt, 12 balls (Pullover 3 balls, Cardigan 4 balls, Skirt 5 balls).

NEEDLES—1 Fleisher's "Comfy-Grip" Sure-Fit 27-inch Circular Steel, Art. 896, Size 2.

1 Fleisher's Steel Crochet Hook, Art. 300, Size 2.

TRIMMINGS—13 Buttons 5/8 inch diameter (Pullover 5 Buttons, Cardigan 8 Buttons).

IMPORTANT—Check your gauge first, see page 46.

PULLOVER

MEASUREMENTS FOR FINISHED GARMENT

Bust 35 inches.

Width across back at underarm 16½ inches.

Length from lower edge to underarm 13 inches.

Length from lower edge to neck edge 21¼ inches.

Sleeves—Width below underarm 13 inches.

Length from lower edge to underarm 4½ inches.

GAUGE (after blocking):

8 sts = 1 inch 11 rows = 1 inch

YOKE—Cast on 108 sts for neck edge. Work back and forth.

First row (wrong side)—P 1, k 2, p 13, * k 2, p 1, k 4, p 1, k 4, p 1, k 2 *, p 14, k 2, p 1, k 2, p 8, k 2, p 1, k 2, p 14, repeat between *'s once, p 13, k 2, p 1.

2nd row—K 1, p 2 (3 sts in back rib), k 13, * cast on 1 st by making a loop on right hand end of needle, p 2, k 1, p 2 (5 sts in raglan seam rib), cast on 1 st, p 2, k 1, p 2 (5 sts in center sleeve rib continued for entire sleeve), cast on 1 st, p 2, k 1, p 2 (5 sts in raglan seam rib), cast on 1 st *, k 14; p 2, k 1, p 2, k 8, p 2, k 1, p 2 (last 18 sts form center front panel which is continued to lower edge), k 14, repeat between *'s once, k 13, p 2, k 1 (116 sts).

3rd row—P 1, k 2, p 14, * k 2, p 1, k 2, p 1, k 2, p 1, k 2, p 1, k 2, p 1, k 2 *, p 15, k 2, p 1, k 2, p 8, k 2, p 1, k 2, p 15, repeat between *'s once, p 14, k 2, p 1.

4th row—K 1, p 2, k 14, * cast on 1, p 2, k 1, p 2, cast on 1, k 1, p 2, k 1, p 2, k 1, cast on 1, p 2, k 1, p 2, cast on 1 *, k 15, p 2, k 1, p 2, k 8, p 2, k 1, p 2, k 15, repeat between *'s once, k 14, p 2, k 1 (124 sts).

5th row—P 1, k 2, p 15, * k 2, p 1, k 2, p 2, k 2, p 1, k 2, p 2, k 2, p 1, k 2 *, p 16, k 2, p 1, k 2, p 8, k 2, p 1, k 2, p 16, repeat between *'s once, p 15, k 2, p 1.

6th row—K 1, p 2, k 15, * cast on 1, p 2, k 1, p 2, cast on 1, k 2, p 2, k 1, p 2, k 2, cast on 1, p 2, k 1, p 2, cast on 1 *, k 16, p 2, k 1, p 2, k 8, p 2, k 1, p 2, k 16, repeat between *'s once, k 15, p 2, k 1 (132 sts).

Continue working ribs in this way, increasing 1 st each side of the 4 raglan seam ribs every 2nd row 42 times more, having 1 st more in each stockinette st section between ribs after each successive increase row, except between ribs of center front panel. Work 1 row even (91 rows). This completes yoke (468 sts). Leave yarn at back edge for working body. Slip 64 sts of right side of back, 99 sts of right sleeve and 142 sts of front

WAY"

NG FOR ACTIVE SPORTS

on separate strands of yarn, leave next 99 sts on needle for left sleeve, slip remaining 64 sts of left side of back on strand of yarn.

LEFT SLEEVE—Join another ball of yarn at front of sleeve, cast on 3 sts for underarm, k these sts, k 13, * p 2, k 1, p 2, k 12, repeat from *, ending last repeat k 13, cast on 3 sts (105 sts).

2nd row—P 16, * k 2, p 1, k 2, p 12, repeat from *, ending last repeat p 16.

3rd row—K 2 tog, k 14, * p 2, k 1, p 2, k 12, repeat from *, ending last repeat k 14, k 2 tog (103 sts).

4th row—P 15, * k 2, p 1, k 2, p 12, repeat from *, ending last repeat p 15.

5th row—K 15, * p 2, k 1, p 2, k 12, repeat from *, ending last repeat k 15.

Repeat last 2 rows once, then repeat 4th row again.

9th row—First decrease row—K 2 tog, k 13, p 2, k 1, p 2, * k 5, k 2 tog, k 5, p 2, k 1, p 2, repeat from * 3 times more, k 13, k 2 tog (97 sts).

10th row—P 14, * k 2, p 1, k 2, p 11, repeat from *, ending last repeat p 14.

11th row—K 14, * p 2, k 1, p 2, k 11, repeat from *, ending last repeat k 14. Repeat last two rows once, then repeat 10th row again.

15th row—2nd decrease row—K 2 tog, k 12, p 2, k 1, p 2, * k 5, k 2 tog, k 4, p 2, k 1, p 2, repeat from * 3 times more, k 12, k 2 tog (91 sts).

Continue working ribs in this way, decreasing 6 sts every 6th row 3 times more (1 st at center of each of the 4 stockinette st sections between ribs and 1 st at each end of row), having 1 st less between ribs and at each side after each successive decrease row (73 sts).

Ribbed Cuff—**First row (wrong side)**—P 1, * k 2, p 1, repeat from * across row.

2nd row—K 1, * p 2, k 1, repeat from * across row. Repeat these 2 rows until cuff measures 1½ inches (sleeve should measure 4½ inches from underarm). Bind off, knitting the k sts and purling the p sts. Sew sleeve seam.

RIGHT SLEEVE—Take up 99 sts and work to correspond to left sleeve.

BODY—Take up sts of right side of back, k 1, p 2, k 61, * pick up and k 6 sts on underarm sts of sleeve *, take up sts of front on left end of needle, k 62, work across 18 sts of front panel, k 62, repeat between *'s once, take up sts of left side of back, k 61, p 2, slip last st (282 sts). Join and work around as follows: K 1, pass slip st of last round over k st, p 2, * k 12, p 2, k 1, p 2, repeat from * twice more, mark this point as beginning of round.

First round—K 27 (underarm sts), * p 2, k 1, p 2, k 12 *, repeat between *'s twice more, work 18 sts of front panel, † k 12, p 2, k 1, p 2, repeat from † twice more, k 27 (underarm sts), repeat between *'s 6 times, p 2, k 1, p 2 (281 sts). Repeat this round until 3¼ inches below underarm.

First decrease round—K 27, * p 2, k 1, p 2, k 5, k 2 tog, k 5 *, repeat between *'s twice more, work 18 sts, † k 5, k 2 tog, k 5, p 2, k 1, p 2, repeat from † twice more,

(*continued on page* 38)

No. 2637—Cardigan

"Shipboard"
No. 2638

☆

No. 2638
Size 16

YARNS—Fleisher's Raw Silk, 11 skeins.
NEEDLES—1 Fleisher's "Comfy-Grip" Sure-Fit 27-inch Circular Steel, Art. 896, Size 2 (Skirt).
1 pair Fleisher's 14-inch Steel, Art. 499, Size 2 (Waist).
1 Fleisher's Steel Crochet Hook, Art. 300, Size 3.
TRIMMINGS—Talon Slide Fastener Style 106, 4 inches long.
Leather Belt 1½ inches wide.
IMPORTANT—Check your gauge first, see page 46.

SKIRT

MEASUREMENTS FOR FINISHED GARMENT
Width at lower edge 46 inches around.
Hipline (7 inches below Waistline) 37 inches.
Waistline 29½ inches.
Length 30 inches (blocked).

GAUGE: 13 sts = 2 inches 9 rounds = 1 inch

Using circular needle, cast on 300 sts for lower edge. Join, taking care sts do not twist on needle. Mark end of rounds as an aid in counting. K until skirt measures 4 inches.

First decrease round—* K 23, k 2 tog, repeat from * around (288 sts). K until 8 inches from lower edge.

2nd decrease round—* K 22, k 2 tog, repeat from * around (276 sts). Continue in this way to decrease 12 sts in a round every 4 inches twice more, having 1 st less between decreases in each successive decrease round and always including preceding decrease round in part worked even. Work 5th decrease round when skirt measures 20 inches or 10 inches shorter than desired finished length (240 sts at hipline). Work a decrease round every 1½ inches 4 times more (192 sts). K until skirt measures 27 inches. Bind off. Working from right side, work 2 rows s c on lower edge, keeping work flat.

Steam, see directions page 47, stretching skirt to 30 inches in length.

WAIST

MEASUREMENTS FOR FINISHED GARMENT
Bust 35 inches.
Width across back at underarm 16½ inches.
Width across back at shoulders 13 inches.
Length from lower edge to underarm 8 inches.
Sleeves—Width below underarm 13 inches.
Length from lower edge to underarm 4½ inches, including border.

GAUGE:

Stockinette St—13 sts = 2 inches 9 rows = 1 inch
Cable St Panel—22 sts = 2 inches

BACK—Using straight needles, cast on 90 sts for lower edge. Work stockinette st (p 1 row, k 1 row), increasing 1 st each side every 4th row 3 times, then every 6th row 6 times (108 sts). Work even until 8 inches from lower edge.

Armholes—Bind off 5 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 7 times (84 sts). Work even until 4 inches above underarm, ending with a p row.

Next row—K 41 sts and slip on holder for right side, bind off next 2 sts for bottom of opening, k to end of row. Work even on the 41 sts of left side until 6 inches above underarm, ending at armhole edge.

Shoulder—Bind off 3 sts at beginning of next row. Keeping center edge even, bind off 4 sts from armhole edge every 2nd row 6 times (27 sts for shoulder). Bind off remaining 14 sts for back of neck. Take up 41 sts of right side. Join yarn at center and work to correspond to left side.

FRONT—Cast on 110 sts for lower edge. Work cable panel on 22 center sts and stockinette st on remaining sts as follows:

First row (wrong side)—P 44, k 3, p 16, k 3, p 44.
2nd row—K 44, p 3, k 16, p 3, k 44.
3rd row—Same as first row.
4th row—Increase 1 st in first st, k 43, p 3, k 16, p 3, k 43, increase 1 st in last st (112 sts).
5th row—P 45, k 3, p 16, k 3, p 45.
6th row—K 45, p 3, k 16, p 3, k 45.
7th row—Same as 5th row.
8th row—Increase 1 st in first st, k 44, p 3, k 16, p 3, k 44, increase 1 st in last st (114 sts).
9th row—P 46, k 3, p 16, k 3, p 46.
10th row—K 46, p 3, k 16, p 3, k 46.
11th row—Same as 9th row.
12th (cable twist) row—Increase 1 st in first st, k 45, * p 3, slip next 8 sts to crochet hook (slip off with hooked end) and hold at back of work, k next 8 sts, k the 8 sts from straight end of hook, p 3 *, k 45, increase 1 st in last st (116 sts).
13th row—P 47, k 3, p 16, k 3, p 47. Continue cable panel up to neck edge, twisting cable (as in 12th row) every 20th row and increasing 1 st each side every 6th row (a k row) 6 times (128 sts). Work even until 8 inches from lower edge, ending with a cable twist row.

Armholes and Neck Shaping—Bind off 8 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 8 times (96 sts). Work even until 5 inches above underarm, ending on right side and having 4 rows above last cable twist row.

Next row—P 37 and slip these sts on holder for right side, bind off next 3 sts, p until 8 sts from bind off and slip these 8 sts of cable on a safety pin for neck border, p next 8 sts and slip to another safety pin, bind off next 3 sts, p to end of row.

Continuing stockinette st on sts of left side, decrease 1 st at end of next row and repeat decrease at neck edge every 2nd row, keeping armhole edge even until 6½ inches above underarm, ending at armhole edge.

Shoulder—Bind off 3 sts at beginning of next row. Bind off 4 sts from armhole edge every 2nd row 6 times, continuing to decrease at neck edge as before until there are 10 decreases in all, then work neck edge even. Fasten off.

Take up 37 sts of right side. Join yarn at center edge and work to correspond to left side.

(*continued on page* 39)

"Vacation Days"
No. 2641

☆

"VACATION DAYS"

WEARABLE AND SO EASY TO DUPLICATE

☆

No. 2641

Size 16

YARNS—Fleisher's Hobnail Sport Yarn†, 16 skeins.
NEEDLES—1 pair Fleisher's 14-inch White, Art 846, Size 5.
TRIMMINGS—Talon Slide Fastener Style 101, 24 inches long.
4 Buttons 1⅜ inch diameter.
IMPORTANT—Check your gauge first, see page 46.
MEASUREMENTS FOR FINISHED GARMENT
Width at lower edge; back 22½ inches, each front 12½ inches.
Width at underarm; back 19 inches, each front 11 inches.
Width across back at shoulders 13½ inches.
Length from lower edge to underarm 23½ inches.
Sleeves—Width below underarm 15 inches.
Length from lower edge to underarm 18 inches.
GAUGE: 11 sts = 2 inches 8 rows = 1 inch

BACK—Cast on 123 sts for lower edge.
First row—* K 1, p 1; repeat from * across row, ending k 1. Repeat this row for 1¾ inches, forming seed st border.
Work stockinette st (k 1 row, p 1 row) until 6 inches from lower edge, ending with a p row. Decrease 1 st each side of next row and repeat decreases every 16th row 8 times more (105 sts). Work even until 23½ inches from lower edge.
Armholes—Bind off 6 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 9 times (75 sts). Work even until 6 inches above underarm.
Shoulders—Bind off 3 sts at beginning of each of next 20 rows (30 sts for each shoulder). Bind off remaining 15 sts for back of neck.

RIGHT FRONT—Cast on 69 sts for lower edge. Work seed st border for 1¾ inches as on back.
Next row (right side)—Work seed st on first 10 sts (front border), k 59.
Next row—P 59, work seed st on 10 sts. Repeat these 2 rows until 6 inches from lower edge, ending at front edge. (Seed st border on front edge is continued up to neck edge.) Decrease 1 st at end of next row (underarm edge) and repeat decrease at same edge every 16th row 8 times more (60 sts).
Work even until same length as back to underarm, ending at underarm edge.
Armhole—Bind off 6 sts at beginning of next row for underarm, work to end. Keeping front edge even, decrease 1 st at armhole edge every 2nd row 13 times (41 sts). Work even until 6 inches above underarm, ending at armhole edge.
Shoulder and Neck Shaping—First row — Bind off 5 sts and work across row (36 sts).
2nd row—Work even.
3rd row—Same as first row (31 sts).
4th row—Bind off 10 border sts, k to end (21 sts).
5th row—Bind off 5 sts, work to end.
6th row—Bind off 3 sts, work to end.
Repeat 5th and 6th row once. Bind off remaining 5 sts.

LEFT FRONT—Cast on 69 sts. Work seed st for 1¾ inches.
Next row—Starting at underarm edge, k 59, work seed st on 10 sts (front border). Complete to correspond to right front, shaping underarm edge and binding off for underarm at beginning of rows worked from right side.

SLEEVE TAB—Cast on 17 sts. Work seed st for 3 inches. Break yarn and slip sts on holder.

RIGHT SLEEVE—Cast on 63 sts for lower edge. Work seed st for 3 inches for cuff. Work stockinette st (k 1 row, p 1 row), increasing 1 st each side of next row and repeating increases every 12th row twice more (69 sts). Work even until sleeve measures 7 inches from lower edge, ending with a p row.
Next row (right side)—K 26, bind off 17 sts, k to end of row.
Next row—P 26, slip 17 sts of sleeve tab onto left hand needle and work seed st across these sts, p remaining 26 sts.
Next row—K 26, work seed st on 17 sts, k 26. (Seed st is continued on 17 center sts to top of sleeve.) Continue to increase 1 st each side every 12th row 7 times more (83 sts). Work even until sleeve measures 18 inches from lower edge, ending on right side.
Bind off 6 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 4th row 11 times (49 sts). P 1 row after last decrease.
Decrease row—K 2 sts tog 8 times, work seed st on 17 sts, k 2 sts tog 8 times (33 sts).
Next row—Bind off 8 sts, work seed st until 17 sts from bind off, bind off 8 sts. Break yarn.
Shoulder Insert—Join yarn in last st worked (front edge of insert) and work seed st on 17 sts for 6¼ inches, ending on wrong side. Bind off 5 sts at beginning of next row (front edge) for shaping neck edge. Bind off 2 sts at front edge every 2nd row 4 times more, keeping back edge even. Bind off remaining 4 sts.

LEFT SLEEVE—Work tab and sleeve same as right sleeve up to shoulder insert. Work shoulder insert to correspond to right shoulder insert, until insert measures 6¼ inches, ending on right side. Bind off 5 sts at beginning of next row (front edge), work to end. Complete to correspond to right sleeve.

POCKETS—Cast on 33 sts for lower edge. Work stockinette st for 6 inches, ending with a p row.
Next row—Bind off 6 sts, k 21 sts, bind off remaining 6 sts. Break yarn. Join yarn in last st worked. Work seed st on 21 sts for 3 inches for pocket flap. Bind off. Make other pocket in same way.

COLLAR—Cast on 21 sts for one end. Work seed st for 5 inches.
Next row—Bind off 10 sts and work across row. Work seed st on remaining 11 sts for 5 inches, ending at same edge on which sts were bound off. Cast on 10 sts. Work seed st even on these 21 sts for 5 inches. Bind off.

FINISHING—Sew seams. Sew 8 bound-off sts at each side of top of right sleeve to edges of shoulder insert for 1½ inches. Sew 17 bound-off sts under sleeve tab to last row on wrong side of sleeve tab. Sew short edge of right shoulder insert to right front shoulder and long edge to shoulder of back. Sew sleeve to armhole.

(continued on page 30)

"Vacation Days" No. 2641

(*continued from page 29*)

Finish left sleeve to correspond.

Pin center of long straight edge of collar at center back of neck. Sew edge of collar to neck edge of coat holding edge in to 15 inches, with ends of collar at front edges of coat. Pin right pocket to right front with lower edge 9½ inches above lower edge and front edge 4¼ inches from front edge of coat. Sew side and lower edges of pocket to coat. Sew 6 bound-off sts at each side of flap to coat. Sew pocket on left front in same way.

Steam, see page 47.

Sew slide fastener to front edges of coat from neck edge to about 6 inches above lower edge.

Tassel—Cut 6 strands of yarn each 5 inches long. Fold these strands double and draw loop through hole in "pull" on slide fastener. Slip ends of yarn through loop and draw up tightly. Trim ends even.

Sew a button in center of each sleeve tab ½ inch above lower edge, tacking tab to sleeve.

Turn pocket flaps over onto right side of pockets and sew a button in center of each flap ½ inch above lower edge, tacking flap to pocket.

Shoulder Insert Facing and Pads—Cut two 11 inch pieces of 3 inch ribbon. Turn down and sew a 1¾ inch hem at one end of each piece. Stuff hem with wool and sew open ends together to make pad. Pin hem of pad to wrong side of shoulder insert at armhole seam. Tack corners of pad to wrong side of sleeve at each side of first row of insert. Sew edges of ribbon to edges of insert, holding front edge in to 4¾ inches and back edge in to 6 inches. Turn end of ribbon under, folding on a slant and sew to neck edge of insert. Sew facing and pad on other insert in same way.

"Bolero" No. 2640

(*continued from page 3*)

sts at each of the 4 corners, by k 1, p 1, k 1 in corner sts. Repeat increases every k row 4 times more, making a buttonhole on 5th and 6th row above hemline to match first buttonhole. Bind off.

FINISHING—Sew underarm seams. Sew seams of sleeve border with contrasting color. Sew sleeves to armholes with sleeve seam at center underarm. Turn under borders of neck and sleeves on ridge and hem. Work buttonholes in buttonhole st.

Crochet Edge—With main color and beginning at lower edge of left back, work 1 s c in end of every 2nd row on edge to beginning of border, with contrasting color finish edge of border, working through 2 thicknesses. Join yarn in first st of last row and work a row of 1 s c in each st. Beginning with contrasting color at top of border, work 2 rows on right back to correspond. With main color and working from right side, work s c across decreased edge of pocket openings. Sew bound-off and short edges of pocket linings to wrong side of front.

SKIRT

MEASUREMENTS FOR FINISHED GARMENT

Width at lower edge 44½ inches around.
Hipline (7 inches below Waistline) 37 inches.
Waistline 28 inches.
Length 30 inches.

GAUGE: 7 sts = 1 inch 11 rounds = 1 inch

FLAP—With main color cast on 36 sts for lower edge. Work back and forth in stockinette st (p 1 row, k 1 row) for 3½ inches, ending with a p row. Slip sts to a strand of yarn.

Cast on 272 sts for lower edge of skirt. Work back and forth in stockinette st, increasing 1 st each side every row 10 times (292 sts). Work even until there is 1 row less than on flap, ending with a k row. Bind off 8 sts at beginning of each of next 2 rows (276 sts), do not turn. Slip sts of flap to left end of needle and k across these sts, join work (312 sts). K until 8 inches from lower edge. Mark end of rounds as an aid in counting.

First decrease round—* K 22, k 2 tog; repeat from * around (13 decreases, 299 sts).

Continue to decrease 13 sts in a round every 5 inches twice more, having 1 st less between decreases in each successive decrease round (273 sts). K until 23 inches, or 7 inches shorter than desired finished length. Work 4th decrease round (260 sts at hipline).

Continue to decrease 13 sts as before every 1½ inches twice, every inch 3 times, always including previous decrease round in part worked even (195 sts). Work even until 30 inches from lower edge. Bind off.

FINISHING—Sew the 8 bound-off sts at each side of skirt to wrong side of flap. Beginning at top of flap and working from right side, work 1 s c in end of every 2nd row on edge, 3 s c in corner, 1 s c in each st across lower edge, 3 s c in corner, 1 s c in every 2nd row on other short edge. Fasten off. Join yarn in first st of last row and work a 2nd row of s c increasing in corners. Beginning at left side of skirt under flap work as follows: 1 s c in end of every 2nd row on side edge to last increase, * skip 1 row, 1 s c in end of each of next 3 rows, repeat from * once, skip 1 row, 1 s c in end of next row; 1 s c in each st across lower edge to first increase, finish as for first side. Fasten off. Working from right side, work a row of 1 s c in each st of row below. Sew skirt to waist with flap at center front of skirt and lapping 8 sts on right side of back of waist over 8 sts on left side.

Casing for Elastic—Work as for 1 piece dress, see page 46.

Steam, see page 47.

Sew buttons 1 inch from edge of left back, opposite buttonholes.

Insert 28 inches elastic in casing.

BOLERO

MEASUREMENTS FOR FINISHED GARMENT

Width around Bolero at underarm 37¾ inches including borders.
Width across back at underarm 17½ inches.
Length from lower edge to underarm 8 inches including border.
Sleeves—Width at underarm 13½ inches.
Length from lower edge to underarm 17½ inches including border.

GAUGE: 7 sts = 1 inch 11 rows = 1 inch

Entire bolero is worked back and forth on circular needle.

BACK—With contrasting color cast on 104 sts for border. Work stockinette st for 1 inch, ending with a k row.

Next row k, increasing 1 st in every 18th st (109 sts). Last row will form a ridge on right side for hem line. K 1 row and continue in stockinette st for 1 inch. With main color work stockinette st for ½ inch. Increase 1 st each side of next row and repeat increases every

inch 6 times more (123 sts). Work even until 8 inches above hem line.

Armholes—Bind off 8 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 7 times (93 sts). Work even until 7 inches above underarm.

Shoulders—Bind off 5 sts at beginning of each of next 4 rows; 4 sts at beginning of each of next 10 rows (30 sts each shoulder). Slip remaining 33 sts to a strand of yarn.

LEFT FRONT—With main color cast on 60 sts for lower edge. Work stockinette st, increasing 1 st at underarm edge (beginning of k rows) every 1½ inches 4 times (64 sts). Decrease 1 st at end of next k row (front edge) and repeat decrease at front edge every 8th row until 7 inches from lower edge.

Shape armhole as on back, repeating decrease at front edge every 8th row until 4½ inches above underarm.

Begin dart decreases: K 16, k 2 tog twice, k to end of row. Repeat dart decreases every 1½ inches twice, working 1 st less before decreases after each decrease row and continuing to decrease at front edge as before until 7½ inches above underarm.

Shoulder—Shape shoulder as on back, continuing to decrease at front edge until 13 sts in all have been decreased, then work front edge even.

RIGHT FRONT—With main color cast on 60 sts. Work to correspond to left front, shaping underarm edge at *end* of k rows, front at *beginning* of k rows.

SLEEVES—With contrasting color cast on 54 sts for border. Work border as on back, increasing 1 st in every 11th st 4 times on hem line row (58 sts). With main color continue stockinette st increasing 1 st each side every inch 14 times; every ½ inch 4 times (94 sts). Work even until 18½ inches from cast-on edge of border. Bind off 8 sts at beginning of each of next 2 rows. Decrease 1 st each side every 2nd row 9 times, every 4th row 7 times, every 2nd row 5 times. Bind off remaining 36 sts. Make other sleeve in same way.

FRONT BORDERS—Sew shoulder seams. Join contrasting color on lower edge of right front at underarm seam. Pick up and k 60 sts across lower edge of front, 3 sts in corner, * 1 st in end of every 2nd row twice, 1 st in end of each of next 2 rows (4 sts to every 6 rows) *, repeat between *'s to shoulder seam, slip sts of back neck edge to needle and k these 33 sts, repeat between *'s down left front, 3 sts in corner, 60 sts across lower edge of left front, turn. Beginning with a p row, work stockinette st for 10 rows, increasing 2 sts in each of the 2 corners at lower front edges every k row.

K next row for hem line, decreasing as follows: K every 14th and 15th st tog 3 times, k to corner; k every 19th and 20th st tog up left front, across back neck edge and down right front to corner; k every 14th and 15th st tog 3 times, k to end. Beginning with a k row, continue stockinette st, decreasing 2 sts in each of the 2 corners every 2nd row until there are 10 rows from hem line. Bind off.

FINISHING—Sew underarm and sleeve seams. Sew sleeves to armholes with sleeve seam at center underarm and extra fullness at top of sleeve folded into 2 pleats 1½ inches apart. Sew border seams and hem border.

Steam, see page 47.

"Terrace" No. 2634

(*continued from page* 4)

FINISHING—Sew seams. Sew sleeves to armholes with sleeve seam at center underarm. Sew pocket linings to wrong side of front, sewing side edges along edges of panels.

SKIRT

MEASUREMENTS FOR FINISHED GARMENT

Width at lower edge 45½ inches around.
Hipline (7 inches below Waistline) 37 inches.
Waistline 28½ inches.
Length 30 inches.

GAUGE:

Bias Knitting-28 sts = 3 inches 9 rounds = 1 inch

Cast on 3 sts for beginning of 1 panel. Work back and forth.

First and all odd numbered rows—K all sts.

2nd row (right side)—Increase 1 st in first st, k next st and mark for center st, increase 1 st in last st (5 sts).

4th row—Increase 1 st in each of first 2 sts, k center st, increase 1 st in each of last 2 sts (9 sts).

6th row—Increase 1 st in first st, k to within 1 st of center st, increase 1 st in next st, k center st, increase 1 st in next st, k across row increasing in last st (13 sts).

7th row—Knit.

Repeat last 2 rows until there are 53 sts on needle, ending with an increase row. Break yarn and slip the 53 sts to a strand of yarn. Make 7 more pieces in same way but do not break yarn when finishing last piece. With right side of all pieces toward you slip the 7 pieces to needle (424 sts).

P 1 round on all sts, joining panels. Mark last st of 8th panel as end of round.

Pattern—**First round**—* Slip, k and pass (always slip st as if to k), k 23, increase 1 st in next st, k center st of panel piece, increase 1 st in next st, k 23, k 2 tog; repeat from * around (424 sts).

2nd round—K all sts.

Repeat the 2 rounds of pattern until skirt measures 6 inches (always measure on line of panel decrease), ending with 2nd round.

First decrease round—* Slip 1, k 2 tog, pass the slipped st over the 2 tog, k 22, increase in next st, k center st, increase in next st, k 22, k 3 tog; repeat from * around (408 sts.)

K 1 round.

Next round—* Slip, k and pass, k 22, increase in next st, k center st, increase in next st, k 22, k 2 tog; repeat from * around.

Repeat last 2 rounds until 10 inches, ending with a plain round.

2nd decrease round—* Slip 1, k 2 tog, pass the slipped st over the 2 tog, k 21, increase 1 st in next st, k center st, increase 1 st in next st, k 21, k 3 tog; repeat from * around (392 sts).

K 1 round.

Continue panel pattern decreasing as above (16 sts in a round) every 4 inches twice more, having 1 st less between decreases and increases in each panel after each successive decrease round and always including preceding decrease round in part worked even. Work 5th decrease round when skirt measures 22 inches, or 8 inches shorter than desired finish length (344 sts at hipline).

Work a decrease round every inch 5 times (264 sts).

Work even until 28 inches measured on line of panel decrease; 29 inches measured on line of panel increase, ending with first pattern round.

Next round—K 15, * bind off the next 3 sts, k until there are 30 sts from bind-off, place these 30 sts on a strand of yarn, repeat from * 6 times, bind off next 3 sts, k to end, break yarn (30 sts on needle).

With right side toward you, join yarn in first st and

work short rows as follows:
First short row—Bind off first 2 sts, k until there are 11 sts on needle, k 2 tog, slip, k and pass, k 11, k 2 tog (25 sts).
2nd short row—Bind off 2 sts, p to within 2 sts of end, p 2 tog (22 sts).
3rd short row—Bind off first 2 sts, k until there are 7 sts on needle, k 2 tog, slip, k and pass, k 7, k 2 tog (17 sts).
4th short row—Same as 2nd short row.
5th short row—Bind off first 2 sts, k until there are 3 sts on needle, k 2 tog, slip, k and pass, k 3, k 2 tog.
6th short row—Same as 2nd short row.
Bind off remaining 6 sts. Fasten off.
Slip next 30 sts from strand of yarn to needle and work short rows as before. Continue in this way until all sts are worked off. Sew in all ends neatly.
BORDER—With right side toward you, join yarn on lower edge at a panel decrease. Pick up and k 38 sts across lower edge of each panel (304 sts). Join, p 1 round, k 1 round. Repeat last 2 rounds 5 times (6 ridges). Bind off.
Sew skirt to waist, with panels on front of waist matching panels on skirt.
Casing for Elastic—Work as for 1 piece dress, see page 46.
Belt Loops—See page 46.
Steam, see page 47.
Insert 28 inches elastic in casing.

"Country Club" No. 2631

(continued from page 7)

SLEEVES—Cast on 76 sts for lower edge. Work stockinette st for 11 rows.
12th row—K 1, * over, k 2 tog, repeat from *, ending row k 1.
13th row—Purl.
14th row—K 24, increase 1 st in each of next 28 sts, k 24 (104 sts).
Work stockinette st, increasing 1 st each side every 4th row 5 times (114 sts). Work even until 4 inches from lower edge.
Bind off 8 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 25 times. Bind off 2 sts at beginning of each of next 4 rows. Bind off remaining 40 sts. Make other sleeve in same way.
COLLAR—Cast on 180 sts for outer edge. Work stockinette st for 9 rows.
10th row—K 2, * k 2 tog, k 4, repeat from *, ending last repeat k 2 (150 sts). Work 9 rows even.
20th row—K 1, * k 2 tog, k 3, repeat from *, ending last repeat k 2 (120 sts). Work even until collar measures 2½ inches from outer edge, ending with a p row. Bind off. Do not break yarn.
Working from right side, work 1 s c in every 2nd row on short edge, 3 s c at corner, 1 s c in each cast-on st, 3 s c at corner, 1 s c in every 2nd row on other short edge.
2nd row—Ch 4, turn, skip first st, 1 d c in next st, * ch 1, skip next st, 1 d c in next st, repeat from * to end of row, working 4 d c with ch 1 between in st at each corner. Fasten off.
FINISHING—Sew seams. Sew sleeves to armholes with sleeve seam at center underarm, gathering extra fullness at top of sleeve. Join yarn on lower edge of blouse at underarm seam. Working from right side, work 1 s c in each st on lower edge; join. Ch 4, turn, * skip next st, 1 d c in next st, ch 1, repeat from * around; join with a slip st to 3rd st of turning chain. Fasten off. Work lower edge of sleeves same as lower edge of blouse.
Join yarn at neck edge on left edge of opening. Work 1 s c in every 2nd row to lower edge of opening, 2 s c at bottom of opening, continue s c on right edge to correspond. Fasten off.
With right side of collar to wrong side of blouse and front edges of collar at edges of opening, sew neck edges together, holding seam in to 14 inches. Run a gathering thread along line of increases at each side of stockinette st triangle to hold fullness in place.
Belt Loops—See page 46.
Steam, see page 47.
Sew slide fastener to edges of front opening, with openwork stripes matching.

SKIRT

MEASUREMENTS FOR FINISHED GARMENT

Width at lower edge 46 inches around.
Hipline (7 inches below Waistline) 37 inches.
Waistline 28¼ inches.
Length 30 inches.

GAUGE: 17 sts = 2 inches 11 rounds = 1 inch

Cast on 390 sts for lower edge. Join, taking care sts do not twist on needle. Mark beginning of rounds as an aid in counting. K until skirt measures 6 inches.
First decrease round—* K 24, k 2 tog, repeat from * around (375 sts). K until 10 inches.
2nd decrease round — * K 23, k 2 tog, repeat from * around (360 sts). Continue in this way, decreasing 15 sts in a round every 4 inches twice more, having 1 st less between decreases in each successive decrease round and always including preceding decrease round in part worked even.
Work 5th decrease round when 23 inches, or 7 inches shorter than desired finished length (315 sts at hipline).
Work 6th decrease round when 25 inches, then a decrease round every inch 4 times (240 sts). K until skirt measures 30 inches. Bind off. Do not break yarn.
Casing for Elastic—Work as for skirts, see page 46. Working from right side, work 2 rows s c on lower edge, keeping work flat.
Steam, see page 47. Insert 28 inches elastic in casing.

"Sophisticate" No. 2632

(continued from page 9)

to end. P 1 row, k 1 row for 5 rows. Continue striped pattern shaping underarm edge, sleeve and shoulder to correspond to left side.
FINISHING—Sew shoulder and sleeve seams. Allowing first 6 rows of back to extend below lower edge of fronts, sew underarm seams, matching pattern stripes of back and fronts, to within 2½ inches of sts cast on for sleeves. Hold in extra fullness of 2 stripes on fronts to back, so that side seams from lower edge of fronts to cast on of sleeves measures 7½ inches. Sew underarm sleeve seams.
Crochet Edges—Join Magic Flake on neck edge at right shoulder seam. Working from wrong side, work 1 s c in each st across top of lapel, 3 s c in corner, 1 s c in end of every 2nd row for 13 full stripes (about 65 rows). Fasten off. Join Magic Flake at lower edge of 13th stripe from top of left lapel. Working from wrong side, work s c to left shoulder seam as for right front. Join Magic Flake at beginning of last row. Working from right side, work * 3 s c on end of p stripe, skip k stripe; repeat from * 12

times, ending last repeat 2 s c in last k stripe at lower edge of left front. Fasten off. Join Magic Flake at lower edge of right front. Working from right side, work s c as for left front. Working from right side, work s c across back of neck, working every 6th and 7th st as 1 s c. Work a row of s c around sleeve edges, working 1 s c in end of every 2nd row. Sew waist to skirt, with center back of waist to center back of skirt and free rows of back to edges of crochet band. Sew lower edge of fronts to crochet band on bodice leaving 3 sts free at center front of skirt.

Girdle—With Angel Crepe ch 9. **First row**—1 s c in 2nd st from hook, 1 s c in each of 7 sts, ch 1, turn. **2nd row**—1 s c in each of 8 sts, ch 1, turn. Repeat 2nd row until 62 inches long. Work 1 row slip st around entire belt. Fasten off.

Belt Loops—Use Angel Crepe, see page 46.

Casing for Elastic—See page 46.

Steam, see page 47.

Sew slide fastener to front edges for 26 stripes from lower edge.

Insert 28 inches elastic in casing.

"Connoisseur" No. 2639

(*continued from page* 11)

piece for other cuff in same way.

Ch 152 inches for jacket edge. Work same as braid for cuff. Baste braid to jacket as follows: Pin one end of braid at lower edge of right underarm seam. Baste braid to right side of back for 3¾ inches with picot at lower edge, make a scroll twisting braid into a circular loop 1¼ inches deep (about 3 inches of braid for loop); continue basting braid making one scroll at center back and one 3¾ inches from left underarm seam. Make a scroll at left underarm seam and 2 more scrolls on lower edge of left front; one at corner and one in center between seam and corner. Make 5 scrolls on left front edge; one at beginning of neck decrease and one at lower edge of slide fastener, the other 3 equally spaced between (about 3½ inches apart). Make 3 scrolls on neck edge, one on left front just below shoulder seam, one at center back of neck and one on right front just below shoulder seam. Continue scrolls on right side to correspond. Sew both edges of braid, leaving picots free. Sew ends together. Sew braid around lower edge of sleeves, making 3 scrolls, one at center of sleeve and one on each side 1½ inches from seam.

Steam braid.

SHOULDER PADS—Cut ribbon into two 18 inch pieces and hem ends. Pleat one edge of each piece into six 1 inch overlapping pleats and tack, making pleated piece 4 inches long. Sew tacked edge of each piece to wrong side of armhole seam, with center of pad at shoulder seam.

SKIRT

MEASUREMENTS FOR FINISHED GARMENT

Width at lower edge 57½ inches around.
Hipline (7 inches below Waistline) 37 inches.
Waistline 28 inches.
Length 30 inches.

GAUGE: 7 sts = 1 inch 11 rounds = 1 inch

Using Krinky Crepe, cast on 403 sts for lower edge. Join, taking care sts do not twist on needle. Mark end of rounds as an aid in counting. K 1½ inches.

First decrease round—* K 29, k 2 tog, repeat from * around (390 sts). K until 3 inches from lower edge.

2nd decrease round—* K 28, k 2 tog, repeat from * around (377 sts). Continue in this way to decrease 13 sts in a round every 1½ inches 7 times more, having 1 st less between decreases in each successive decrease round and always including preceding decrease round in part worked even (286 sts). Work 10th decrease round when 18 inches and 11th decrease round when 23 inches or 7 inches shorter than desired finished length (260 sts at hipline). Work 12th decrease round when 25 inches, then a decrease round every inch 4 times more (195 sts). K until skirt measures 30 inches. Bind off, do not break yarn.

Casing for Elastic—Work as for skirts, see page 46. With size 2 hook and working from right side, work 2 rows s c on lower edge of skirt, keeping work flat.

Steam, see directions page 47.

Insert 28 inches elastic in casing.

"Spectator" No. 2643

(*continued from page* 12)

SKIRT

MEASUREMENTS FOR FINISHED GARMENT

Width at lower edge 46 inches around (above joining of slits).
Hipline (7 inches below Waistline) 37 inches.
Waistline 28¼ inches.
Length 30 inches.

GAUGE: 17 sts = 2 inches 11 rounds = 1 inch

Hem is worked back and forth.

Using circular needle and color A, cast on 390 sts for half of lower edge of hem.

First row—Inserting needle in back of st k the st, * bring yarn to front of work, slip next st as if to p, take yarn tightly across in front of slipped st and to back of work, k 1 inserting needle in front of st; repeat from *, ending row slip last st. Repeat this row for 2½ inches, working an even number of rows (2 rows make 1 row on each side of hem).

Next row (right side)—K 2 tog continuously across row (195 sts). This completes half of hem. Break yarn. Leave sts on needle. On same end of needle cast on 390 sts and make other half of hem in same way. Do not break yarn.

With right side of hem toward you, join and k around until skirt measures 6½ inches from lower edge of hem. Mark end of rounds as an aid in counting.

First decrease round—* K 24, k 2 tog, repeat from * around (375 sts). K until 10½ inches from lower edge of hem.

2nd decrease round—* K 23, k 2 tog, repeat from * around (360 sts). Continue in this way to decrease 15 sts in a round every 4 inches twice more, having 1 st less between decreases in each successive decrease round and always including preceding decrease round in part worked even.

Work 5th decrease round when skirt measures 23 inches or 7 inches shorter than desired finished length (315 sts at hipline).

Work 6th decrease round when skirt measures 25 inches, then a decrease round every inch 4 times more (240 sts). K until skirt measures 30 inches. Bind off. Do not break yarn.

Casing for Elastic—Work as for skirts, see page 46.

Steam lightly, see page 47.

Insert 28 inches elastic in casing.

"Cruiser" No. 2633

(*continued from page* 15)

k row) 12 times (71 sts). Begin box pleat.
First row (wrong side)—P 27, k 17 for pleat, p 27.
2nd row—K 27, p 17, k 27.
3rd row—P 27, k 17, p 27. Continuing to work pleat on 17 center sts for remainder of sleeve, decrease 1 st each side of next row and repeat decreases every 4th row 6 times more (57 sts). Bind off 2 sts at beginning of each of next 4 rows, then 3 sts at beginning of each of next 2 rows. Bind off remaining 43 sts. Make other sleeve in same way.

SCROLL BANDS—Using Angel Crepe cast on 9 sts for one sleeve band.
First row—* K 1, p 1, repeat from * across row, ending k 1. Repeat this row (forming seed st) until band measures 19 inches. Bind off. Make band for other sleeve in same way. Make a band 49½ inches long for neck and back button band, in same way as sleeve bands.

FINISHING—Sew seams. Sew bound-off edges of box pleats to wrong side of blouse, sewing along row below bind-off row of pleats. Tack edges of pleats together on right side for 2 rows above joining. Pin center of top edge of sleeve to armhole at shoulder seam. Fold 17 p sts at center into an inverted box pleat, with k sts at each edge of pleat meeting on right side of sleeve at shoulder seam. Sew sleeve to armhole and tack folded edges of box pleat to wrong side of armhole seam. Sew other sleeve in same way. Join Magic Flake on lower edge of blouse at corner of left side of back. Working from right side, work 1 s c in every 2nd row on center back edge to neck edge, 1 s c in each of 21 cast-on sts, 33 s c to front neck edge, 1 s c in each of 14 cast-on sts, work s c to lower edge of right side to correspond, 3 s c at corner, 1 s c in each st on lower edge, join. Ch 1, turn, work 1 s c in each s c on lower edge. Fasten off. Join Magic Flake on lower edge of sleeves at seam. Working from right side, work 1 s c in each st on lower edge; join. Fasten off.

Steam blouse and scroll bands, see page 47.
Run a basting thread down center of sleeve from beginning of box pleat to lower edge. Mark center of sleeve band. Pin one end of sleeve band to lower edge of right sleeve at seam. Sew top edge of band to lower edge of front of sleeve for 2¼ inches from seam. Pin band on sleeve to form oval loop (see diagram for measurements), with center of band at basting in center of sleeve, top edge of loop about 2 inches below p sts of box pleat and lower edge of band crossing at center of lower edge of sleeve. Sew ends of band together at sleeve seam and sew top edge of band to lower edge of back of sleeve for 2¼ inches from seam. Gather inside edge of loop, so that it will lie flat. Sew both edges of loop to sleeve and to crossed over part of band. Sew remainder of top edge of band to sleeve. Finish other sleeve to correspond, crossing band in opposite direction to form loop. Run a basting thread down center front of blouse for 3¾ inches below neck edge. Place one end of button band between center back edges at lower edge. Sew both edges of band to back edges for 19¼ inches above lower edge (1¼ inches below last neck increase). Sew inner edge of band to remainder of back edge and to right neck edge (leaving a little fullness on edge of band around corner at back of neck and stretching at curved part of neck at shoulder seam), sewing it up to the 14 sts cast on for front neck edge. Pin band on front to form oval loop (see diagram for measurements), with center of loop at basting. Sew other edge of band to left neck edge and tack end of band under back button band 19¼ inches above lower edge of blouse. Gather inside edge of loop. Sew both edges of loop to front and to crossed over part of band. Steam bands. Sew top button in center of back button band 19¼ inches above lower edge of blouse (at dividing point of neck opening). Sew other buttons on band 2¾ inches apart.

Blouse
Scroll Diagram

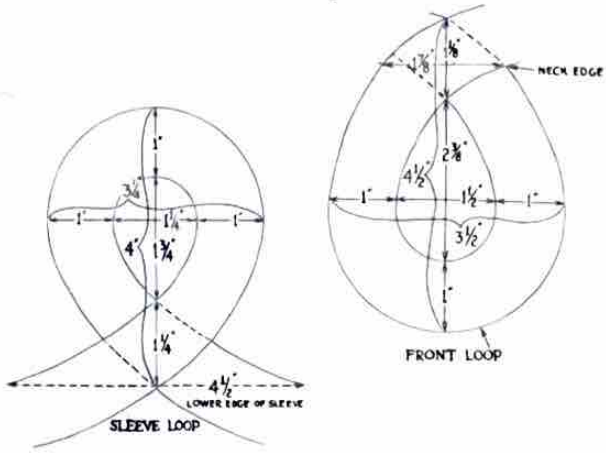

SKIRT

MEASUREMENTS FOR FINISHED GARMENT

Width at lower edge 48 inches around.
Hipline (7 inches below Waistline) 36¾ inches.
Waistline 28 inches.
Length 30 inches.

GAUGE: 17 sts = 2 inches 11 rounds = 1 inch
Using Magic Flake, cast on 408 sts for lower edge. Join, taking care sts do not twist on needle. Mark end of rounds as an aid in counting.
First round—* K 58, p 10; repeat from * around. Repeat this round until skirt measures 3 inches. There will be 6 k gores and 6 p ribs of 10 sts each which will be continued for entire skirt.
First decrease round—* K 1, k 2 tog, k 52, slip, k and pass, k 1, p 10; repeat from * around (396 sts).
Next round—* K 56, p 10; repeat from * around. Repeat this round until 6 inches.
2nd decrease round—* K 1, k 2 tog, k 50, slip, k and pass, k 1, p 10; repeat from * around (384 sts).
Continue in this way decreasing 12 sts in a round every 3 inches 5 times more (2 sts in each k gore), having 2 sts less between decreases in each gore in each successive decrease round and always including preceding decrease round in part worked even. Work 8th decrease round when skirt measures 23 inches or 7 inches shorter than desired finished length (312 sts at hipline). Then work a decrease round every inch 6 times (240 sts). Work until skirt measures 30 inches. Bind off. Do not break yarn.

Casing for Elastic—Work as for skirts, see page 46.
FINISHING—Join Magic Flake on lower edge of skirt at beginning of round. Working from right side, * work 1 s c in each of 10 p sts, draw up a loop in each of next 2 sts and work off as 1 s c, 1 s c in each of next 54 sts, draw up a loop in each of next 2 sts and work off as 1 s c; repeat from * around. Join; ch 1, turn, work 1 s c in each st of row below. Join; fasten off.
Steam, see page 47.
Insert 28 inches elastic in casing.

"Sorority" No. 2636

(*continued from page 16*)

FRONT—Cast on 155 sts for lower edge (6 pattern stripes). Work pattern and shape as on back (omitting 3rd increase row) until 1¾ inches above underarm, ending with 7th pattern row (134 sts).

Next row—Work 13 sts, * bind off the next 27 sts for pocket opening *, work until 54 sts from bind off, repeat between *'s once, work to end.

Next row—Work 13 sts, * slip sts of 1 pocket lining to left end of needle, with right side of lining to wrong side of front, continue pattern across these 27 sts *, work 54 sts, repeat between *'s once, work to end.

Work 22 rows in pattern, ending with 7th pattern row. Bind off for pocket openings and join linings as below. Work even until 6¾ inches above underarm, ending with 8th pattern row.

Neck Shaping—Work pattern across 43 sts, bind off next 48 sts for front neck edge, work pattern to end. Continuing on sts of right side, bind off 8 sts from neck edge every 2nd row twice, being careful to have correct number of sts on each row. Work 1 row even.

Bind off remaining 27 sts for shoulder.

Join yarn at neck edge and work left side to correspond to right side.

SLEEVES—Cast on 97 sts for lower edge.

Pattern—**First row**—P 2, * p 3, k 2 tog, k 3, increase 1 st in next st, k 2, increase 1 st in next st, k 4, slip, k and pass, p 6; repeat from *, ending last repeat p 5 (21 sts in each of 4 pattern stripes, 3 p sts between pattern stripes). Continue even in pattern until 1 inch from lower edge.

Increase 1 st each side of next row (99 sts). Work even until 2 inches from lower edge, ending with 7th pattern row.

Increase row—Increase 1 st in first st, k 2, * p 21, increase 1 st in each of next 2 sts, k 1, repeat from * twice, p 21, k 2, increase in last st (107 sts).

Work even until 3 inches from lower edge.

Increase 1 st each side of next row (109 sts). Work even until 4 inches from lower edge, ending with 3rd pattern row.

Increase row—K 3, increase 1 st in each of next 2 sts, k 2, * p 17, k 3, increase in each of next 2 sts, k 4; repeat from *, ending last repeat k 2 instead of 4 (119 sts). Work even until 4¾ inches from lower edge, ending with 4th pattern row.

Bind off 7 sts at beginning of each of next 2 rows. Decrease 2 sts each side every 2nd row 5 times, 1 st each side every 2nd row 23 times, being careful to have correct number of sts on each row. Bind off remaining 39 sts, working every 4th and 5th st together. Make other sleeve in same way.

FINISHING—Sew underarm, sleeve and right shoulder seams. Sew left shoulder seam to within 1¼ inches of neck edge. Sew sleeves to armholes with sleeve seam at center underarm and extra fullness of sleeve held in across top of armhole.

Sew pocket linings to wrong side of blouse.

Join yarn on lower edge at left underarm seam. Working from right side, * work 1 s c in each st to center of pattern stripe, draw up a loop in each of next 2 sts and work as 1 s c, repeat from * around. Join; fasten off. Working from right side, work 1 s c in each st across top of pocket openings. Work s c on lower edge of sleeves as on lower edge of blouse. Join yarn at end of left shoulder seam, work s c across front shoulder opening, front and back neck edge and back shoulder opening, working 1 s c in each st to p ribs between pattern stripes, decreasing 2 sts in center of each p rib. Ch 1, turn, work 2 rows of 1 s c in each st across back shoulder opening for underlap.

Block, see page 47 pinning to correct measurements.

Sew 3 snap fasteners to left shoulder opening.

SKIRT

MEASUREMENTS FOR BLOCKED GARMENT

(1¼ inches allowed on all measurements of width in order to give pattern a ripple effect).
Width at lower edge 48¼ inches around.
Hipline (7 inches below Waistline) 38½ inches.
Waistline 30 inches.
Length 30 inches.

GAUGE (after blocking):
Stockinette St—8 sts = 1 inch 11 rounds = 1 inch
1 Pattern (21 sts) = 2¼ inches

Pattern stripe is a multiple of 21 sts, the number of p sts between patterns is decreased for shaping.

Cast on 374 sts for lower edge. Do not join. K 3 rows.

Next row—K 13, † * increase 1 st in next st, k 1, repeat from * 3 times, k 26, repeat from †, ending last repeat k 13 instead of 26 (418 sts). Do not turn.

Join, taking care sts do not twist on needle. Mark end of rounds as an aid in counting.

Pattern—**First round**—P 8, * p 3, k 2 tog, k 3, increase 1 st in next st, k 2, increase 1 st in next st, k 4, slip, k and pass, p 20; repeat from *, ending last repeat p 12 instead of 20 (21 sts in each of 11 pattern stripes, the 17 p sts at end of repeat is reverse stockinette st stripe between pattern stripes).

2nd round—P 11, * k 15, p 23; repeat from *, ending last repeat p 12 instead of 23.

3rd round—P 8, * p 2, k 2 tog, k 3, increase in next st, k 4, increase in next st, k 4, slip, k and pass, p 19; repeat from *, ending last repeat p 11 instead of 19.

4th round—P 10, * k 17, p 21; repeat from *, ending last repeat p 11 instead of 21.

5th round—P 8, * p 1, k 2 tog, k 3, increase in next st, k 6, increase in next st, k 4, slip, k and pass, p 18; repeat from *, ending last repeat p 10 instead of 18.

6th round—P 9, * k 19, p 19; repeat from *, ending last repeat p 10 instead of 19.

7th round—P 8, * k 2 tog, k 3, increase in next st, k 8, increase in next st, k 4, slip, k and pass, p 17; repeat from *, ending last repeat p 9 instead of 17.

8th round—P 8, * k 21, p 17; repeat from *, ending last repeat p 9 instead of 17.

These 8 rounds complete the pattern and are repeated for entire skirt.

Work even until 6 inches from lower edge, ending with first pattern round.

First decrease round—P 6, * p 2 tog, p 3, k 15, p 3, p 2 tog, p 13; repeat from *, ending last repeat p 7 instead of 13 (22 decreases, 396 sts).

Continue in this way, decreasing 1 st each side of each reverse stockinette st stripe every 6 inches twice more; having 2 sts less between decreases after each successive decrease round (352 sts).

Work even with 11 sts in reverse stockinette st stripes until 23 inches, or 7 inches shorter than desired finished length.

4th decrease round—Decrease 1 st in center of each reverse stockinette st stripe (11 decreases, 341 sts at hipline).

Decrease 1 st at each side of each reverse stockinette st stripe every 2 inches 3 times (275 sts).

Work even with 4 sts in reverse stockinette st stripes until 30 inches from lower edge.

Bind off working 2 sts together 3 times across top of each pattern stripe. Do not break yarn.
Working from right side, work 1 h d c in each of 2 sts (above p sts), * 1 s c in each of 4 sts, 1 slip st in each of 9 sts across top of pattern stripe, 1 s c in each of 4 sts, 1 h d c in each of 5 sts; repeat from *, ending last repeat 1 h d c in each of 3 sts. Do not break yarn.
Casing for Elastic—Work as for skirts, see page 46.
FINISHING—Sew ends of first 4 rows together. Beginning at seam and working from wrong side, work crochet on lower edge as follows: 1 slip st in each of 11 sts, * 1 s c in each of 2 sts, 1 h d c in each of 2 sts, 1 d c in each of 4 sts, 1 h d c in each of 2 sts, 1 s c in each of 2 sts, 1 slip st in each of 22 sts, repeat from *, ending 1 slip st in each of 11 instead of 22 sts. Join, fasten off.
Block, pinning to correct measurements, see page 47. Insert 28 inches elastic in casing.

"Sunday Night" No. 2630

(*continued from page* 19)

k 2, slip, k and pass, over, k 4 (size 38-6; size 42-8), repeat from * twice, ending last repeat k 54 (size 38-61; size 42-67).
18th row—K 54 (size 38-61; size 42-67), * over, k 2 tog, k 3, over, k 2 tog, k 1, slip, k and pass, over, k 3, slip, k and pass, over, k 4 (size 38-6; size 42-8), repeat from * twice, ending last repeat k 54 (size 38-61; size 42-67).
20th row—Same as 16th row.
22nd row—Same as 14th row.
24th row—Same as 12th row.
These 24 rows complete panel pattern. Panel pattern is continued in this way up to beginning of cowl neck increases, at the same time when front measures 6 inches from lower edge, ending on wrong side, work 12 short rows as follows:
Underarm Darts—**First row**—Work 141 (size 38-159; size 42-175) sts. Turn at end of every row. Always slip first st at beginning of each row after turning.
2nd row—Work 121 (size 38-139; size 42-155) sts.
3rd row—Work 125 (size 38-143; size 42-159) sts.
4th row—Work 129 (size 38-147; size 42-163) sts. Continue in this way to work 4 sts more each row for 7 rows more.
12th row—Work across all sts. Work even until front measures same as back to underarm, measured at underarm edge, ending on right side.
Armholes—Bind off 11 (size 38-13; size 42-15) sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 10 (size 38-13; size 42-15) times, 119 (size 38-127; size 42-135) sts. P 1 row after last decrease row. Begin increasing for cowl neck in each of the 2 seam st sections of panel as follows:
First increase row—Work pattern as before on 49 (size 38-51; size 42-53) sts, * cast on 1 st by making a loop on right hand end of needle, k 2 (size 38-4; size 42-6), cast on 1 st *, work pattern on next 17 sts, repeat between *'s once, work pattern across row, 123 (size 38-131; size 42-139) sts. Continue working pattern even for 9 rows with 6 (size 38-8; size 42-10) sts in each dart st section.
2nd increase row—Work 49 (size 38-51; size 42-53) sts, * cast on 1 st, k 4 (size 38-6; size 42-8) sts, cast on 1 st *, work 17 sts, repeat between *'s once, work across row, 127 (size 38-135; size 42-143) sts. Continuing in this way increase 4 sts every 10th row 4 times more, having 2 sts more in each dart st section after each increase row and at the same time shape top of armholes when same length as on back, then shape shoulders as on back. Bind off remaining 83 (size 38-87; size 42-91) sts for neck edge.

SLEEVES—Cast on 107 (size 38-115; size 42-123) sts for turn back cuff. K 1 row, p 1 row and repeat until there are 10 rows, ending on wrong side of cuff with a p row. P next row to reverse stockinette st for wrong side of sleeve. K next row and continue in stockinette st for 10 rows more, ending with a k row.

Sleeve Pattern—**First and all odd numbered rows**—Purl.
2nd row—* K 40 (size 38-42; size 42-44), slip, k and pass, over, k 4 (size 38-6; size 42-8), over, k 2 tog *, over, k 2 tog, k 7, slip, k and pass, over, † slip, k and pass, over, k 4 (size 38-6; size 42-8), over, k 2 tog, k 40 (size 38-42; size 42-44) †.
4th row—Repeat between *'s of 2nd row once, k 1, over, k 2 tog, k 5, slip, k and pass, over, k 1, repeat between †'s of 2nd row once.
6th row—Repeat between *'s of 2nd row once, k 2, over, k 2 tog, k 3, slip, k and pass, over, k 2, repeat between †'s of 2nd row once.
8th row—Repeat between *'s of 2nd row once, k 3, over, k 2 tog, k 1, slip, k and pass, over, k 3, repeat between †'s of 2nd row once.
10th row—Same as 6th row.
12th row—Same as 4th row.
14th row—Same as 2nd row.
15th row—Purl.
16th row—Repeat between *'s of 2nd row once, k 11, repeat between †'s of 2nd row once. Repeat last 2 rows 4 times more. These 24 rows form one complete pattern. Continue in this way working pattern up center to top of sleeve. Work even until sleeve measures 16¾ inches from beginning, ending with 18th pattern row. Bind off 8 (size 38-10; size 42-12) sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 21 times. Then decrease 2 sts each side, by knitting 2 sts tog twice, every 2nd row 5 times, ending with 24th pattern row, 29 (size 38-33; size 42-37) sts.
Next row—Bind off 7 (size 38-9; size 42-11) sts, p until 15 sts from bind off, bind off remaining 7 (size 38-9; size 42-11) sts. Break yarn.

Triangle Insert—Join yarn in last st worked and work on remaining 15 sts as follows:
First row—K 2 tog, over, k 2 tog, k 7, slip, k and pass, over, k 2 tog—13 sts.
2nd and all even numbered rows—Purl.
3rd row—K 2 tog, over, k 2 tog, k 5, slip, k and pass, over, k 2 tog—11 sts.
5th row—K 2 tog, over, k 2 tog, k 3, slip, k and pass, over, k 2 tog—9 sts.
7th row—K 2 tog, over, k 2 tog, k 1, slip, k and pass, over, k 2 tog—7 sts.
9th row—K 2 tog, over, k 3 tog, over, k 2 tog—5 sts.
11th row—K 2 tog, k 1, k 2 tog—3 sts.
12th row—P 3 tog. Fasten off. Make other sleeve in same way.

BELT—Ch 17. Work 1 s c in 2nd st from hook and in each st on chain.
2nd row—Ch 1, turn, work 1 s c in each st of row below, 16 sts. Repeat this row until belt measures 26½ (size 38-30½; size 42-34½) inches. Fasten off.

FINISHING—Sew underarm and shoulder seams. Sew sleeve seams, sewing turn back cuff on reverse side.

Sew sleeves to armholes with sleeve seam at center underarm and edges of triangle insert to decreased part at top of armholes.

Join yarn on edge of turn back cuff at seam. Working from right side of cuff, work 1 s c in each st on edge; join. Ch 1, turn, work 1 s c in each st of row below. Join; fasten off. Sew ribbon facing to wrong side of cuff. Turn cuff back. Finish other cuff in same way.

Join yarn on neck edge at shoulder seam. Work 2 rows s c around neck edge as on cuff.

SKIRT

MEASUREMENTS FOR FINISHED GARMENT

Width at lower edge 45¾ (Size 38-49½; Size 42-54½) inches around.
Hipline—7 inches below Waistline 37 (Size 38-40½; Size 42-45¾) inches.
Waistline 30 (Size 38-33½; Size 42-38¾) inches.
Length 30 inches.

GAUGE: 17 sts = 2 inches 11 rounds = 1 inch

Cast on 390 (size 38-420; size 42-465) sts for lower edge. Join, taking care sts do not twist on needle. Mark end of rounds as an aid in counting. K until skirt measures 6 inches.

First decrease round—* K 24 (size 38-26; size 42-29), k 2 tog, repeat from * around, 375 (size 38-405; size 42-450) sts. K until 10 inches.

2nd decrease round—* K 23 (size 38-25; size 42-28), k 2 tog, repeat from * around, 360 (size 38-390; size 42-435) sts.

Continue in this way to decrease 15 sts every 4 inches twice more, having 1 st less between decreases in each successive decrease round and always including preceding decrease round in part worked even.

Work 5th decrease round when skirt measures 23 inches or 7 inches shorter than desired finished length, 315 (size 38-345; size 42-390) sts at hipline.

Work a decrease round every 1½ inches 4 times more, 255 (size 38-285; size 42-330) sts. K until skirt measures 30 inches. Bind off.

FINISHING—Join yarn on lower edge of skirt. Working from right side, work 1 row s c keeping work flat, ch 1, turn, work a 2nd row of 1 s c in each st. Join; fasten off. Sew skirt to waist.

Casing for Elastic—Work as for one piece dress, see page 46.

Belt Loops—See page 46.

Steam, see directions page 47.

Insert 28 (size 38-32; size 42-36) inches elastic in casing.

Cover a lead weight with ribbon. Make a ch 1 inch long. Fasten off. Sew one end of chain to weight and other end to center front neck edge.

Place a clip at each side of neck over shoulder seams. Sew buckle to ends of belt.

"Campus" No. 2642

(*continued from page* 20)

Next row—K 21 sts and slip on holder for front yoke, bind off next 5 sts, k to end of row. Work even on the 21 sts of back yoke until 7½ inches from beginning of yoke (about 2½ inches from dividing point). Slip these sts on holder, break yarn leaving an 18 inch end for weaving. Take up front yoke sts. Join yarn at inside edge. Work even until 8 inches from beginning of yoke (about 3 inches from dividing point). Bind off.

LEFT SLEEVE AND HALF OF YOKE—Work to correspond to right sleeve, having first 21 sts on k row for back of yoke, last 21 sts for front yoke.

FINISHING—Sew the 6 sts bound off at each side on top of sleeves to 1 inch on edges of yoke. Weave the 21 sts of each half of back yoke together, see page 43.

Sew underarm and sleeve seams.

Sew lower edge of back yoke to top edge of back.

Join yarn on bound-off edge of left front yoke at lower edge.

Working from wrong side, work 1 s c in each of the 21 bound-off sts, 3 s c at corner, 21 s c on top edge of left lapel, 1 s c in each of 5 bound-off sts, 30 s c on back neck edge, continue s c on right edge to correspond. Ch 1, turn, work 1 s c in each st of row below, working 3 s c at corners of lapels. Fasten off. Sew lower edge of each half of front yoke to top edge of front, holding in extra fullness of fronts to 14 inches and having crocheted edges of lapels meet at center front. Sew sleeves to armholes with sleeve seam at center underarm. Working from right side, work 1 s c in each st on lower edge of blouse; join. Ch 1, turn, work 1 s c in each st of row below; join. Fasten off. Working from right side of sleeve and beginning at seam, work 1 s c in each of 18 sts on lower edge, * draw up a loop in each of next 2 sts and work as 1 s c, repeat from * 23 times, 1 s c in each of next 18 sts; join.

Ch 1, turn, work 1 s c in each st of row below; join. Repeat last row 8 times more. Fasten off. Work s c on other sleeve in same way.

Belt Loops—See page 46.

Steam, see page 47.

Fasten clip at center front at bottom of neck opening.

"Ping Pong" No. 2644

(*continued from page* 23)

by making a loop on right point of needle, k 1, k 3 tog; repeat from * around (225 sts). Cast on 8 sts at end of row for underlap (233 sts), turn. Work back and forth in stockinette st (p 1 row, k 1 row) for ½ inch, ending with a p row. Next row k 2, bind off next 4 sts for buttonhole, k to end. Next row cast on 4 sts over bound off sts. Work even until 1½ inches above ribbing, ending with a p row.

2nd decrease row—* K 13, k 2 tog; repeat from * 14 times, k to end (218 sts). Work even repeating buttonhole at right front edge with 1½ inches between each buttonhole until skirt measures 28 inches, ending with a p row.

3rd decrease row—* K 12, k 2 tog; repeat from * 14 times, k to end (203 sts). Work until there are 3 buttonholes and skirt measures 29 inches, ending with a p row.

4th decrease row—* K 11, k 2 tog; repeat from * 14 times, k to end (188 sts). Work even until 30 inches from lower edge. Bind off.

Working from right side work a row of s c around lower edge, keeping work flat.

Sew skirt to waist with edges of front openings matching.

Crochet Edge—Working from right side join yarn at lower edge of right front opening on skirt, work 1 s c in end of every 2nd row to neck edge, 3 s c in corner, 1 s c in each st to joining of collar. Fasten off. Beginning at joining of collar, work s c down left front to correspond, ch 1, turn, work a 2nd row of 1 s c in each st to neck edge. Fasten off.

Work buttonholes in buttonhole st.

Casing for Elastic—Working from wrong side join yarn in 2nd row above waistline at inside edge of s c on left front, ch 4, * skip 1 st, 1 slip st in next st at left in 4th row below, ch 4, 1 slip st in 3rd st at left of first st in 4th row above, ch 4; repeat from *, ending at inside edge of s c on right front. Fasten off.

Belt Loops—See directions page 46.

Block, see directions page 47, stretching skirt at lower edge to correct measurements.

Insert 28 inches elastic in casing and sew ends at inside edge of s c rows. Sew a hook and eye on ends of elastic. Sew buttons ¾ inch from left front edge opposite buttonholes. Sew snap fastener at neck edge.

"Fairway" No. 2637

(*continued from page* 25)

k 27, repeat between *'s 6 times, p 2, k 1, p 2 (269 sts).

Next round—K 27, * p 2, k 1, p 2, k 11 *, repeat between *'s twice more, work 18 sts, † k 11, p 2, k 1, p 2, repeat from † twice more, k 27, repeat between *'s 6 times, p 2, k 1, p 2. Repeat this round 6 times more.

2nd decrease round—K 27, * p 2, k 1, p 2, k 5, k 2 tog, k 4 *, repeat between *'s twice more, work 18 sts, † k 5, k 2 tog, k 4, p 2, k 1, p 2, repeat from † twice more, k 27, repeat between *'s 6 times, p 2, k 1, p 2 (257 sts). Continue working ribs in this way decreasing 12 sts every 8th round 3 times more (1 st at center of stockinette st sections between ribs, except in center front panel and underarm sections), having 1 st less in decreased sections after each successive decrease round (221 sts). Continuing ribs, work even until 8½ inches below underarm.

First increase round—K 27, * p 2, k 1, p 2, k 4, cast on 1 st, k 3 *, repeat between *'s twice more, work 18 sts, † k 4, cast on 1 st, k 3, p 2, k 1, p 2, repeat from † twice more, k 27, repeat between *'s 6 times, p 2, k 1, p 2 (233 sts). Continuing in this way, increase 12 sts every 12th round twice more, increasing 1 st at center of each stockinette st section which was decreased before (257 sts). Work ribs even until 13 inches below underarm. Bind off as before. Do not break yarn.

FINISHING—Working from right side, work 1 s c in each bound-off st on lower edge; join. Ch 1, turn, work 1 s c in each st of row below; join. Fasten off. Join yarn on left corner of back neck opening. Working from right side, work 1 s c in each st on neck edge, 3 s c at corner, 1 s c in every 2nd row on both edges of back opening; join.

2nd row—Ch 1, turn, work 1 s c in each st on left edge of opening. Repeat last row 3 times more for underlap. Fasten off. Join yarn on right corner of neck opening. Working from right side, work 1 s c in first st on right edge of opening, * ch 3 for button-loop, skip next 2 sts, 1 s c in each of next 7 sts, repeat from * 4 times more, ending last repeat 1 s c in each remaining st to bottom of opening. Fasten off. Sew lower edge of underlap to wrong side of back.

Steam, see page 47.

Sew 5 buttons on purled rib at left edge of opening, opposite buttonloops.

CARDIGAN

MEASUREMENTS FOR FINISHED GARMENT

Width across back at underarm 16½ inches.
Width of each front at underarm 9¾ inches.
Length from lower edge to underarm 14 inches.
Length from lower edge to neck edge 22¾ inches.
Sleeves—Width below underarm 13½ inches.
Length from lower edge to underarm 18 inches.

GAUGE (after blocking):

8 sts = 1 inch 11 rows = 1 inch

Cardigan is worked back and forth on circular needle.

YOKE—Cast on 107 sts for neck edge.

First row (wrong side)—P 8, k 2, p 1, k 2, p 12, * k 2, p 1, k 4, p 1, k 4, p 1, k 2 *, p 11, k 2, p 1, k 2, p 11, repeat between *'s once, p 12, k 2, p 1, k 2, p 8.

2nd row—K 8, p 2, k 1, p 2 (5 sts in left front rib), k 12, * cast on 1 st, p 2, k 1, p 2 (5 sts in raglan seam rib), cast on 1 st, p 2, k 1, p 2 (5 sts in center sleeve rib), cast on 1 st, p 2, k 1, p 2 (5 sts in raglan seam rib), cast on 1 st *, k 11, p 2, k 1, p 2 (5 sts in center back rib), k 11, repeat between *'s once, k 12, p 2, k 1, p 2 (5 sts in right front rib), k 8 (115 sts).

3rd row—P 8, k 2, p 1, k 2, p 13, * k 2, p 1, k 2, p 1, k 2, p 1, k 2, p 1, k 2, p 1, k 2 *, p 12, k 2, p 1, k 2, p 12, repeat between *'s once, p 13, k 2, p 1, k 2, p 8.

4th row (Buttonhole row)—K 8, p 2, k 1, p 2, k 13, * cast on 1, p 2, k 1, p 2, cast on 1, k 1, p 2, k 1, p 2, k 1, cast on 1, p 2, k 1, p 2, cast on 1 *, k 12, p 2, k 1, p 2, k 12, repeat between *'s once, k 13, p 2, k 1, p 2, k 1, bind off next 4 sts for buttonhole, k to end of row.

5th row—P 3, cast on 4 sts, p 1, k 2, p 1, k 2, p 14, * k 2, p 1, k 2, p 2, k 2, p 1, k 2, p 2, k 2, p 1, k 2 *, p 13, k 2, p 1, k 2, p 13, repeat between *'s once, p 14, k 2, p 1, k 2, p 8 (123 sts).

6th row—K 8, p 2, k 1, p 2, k 14, * cast on 1, p 2, k 1, p 2, cast on 1, k 2, p 2, k 1, p 2, k 2, cast on 1, p 2, k 1, p 2, cast on 1 *, k 13, p 2, k 1, p 2, k 13, repeat between *'s once, k 14, p 2, k 1, p 2, k 8 (131 sts). Continue working ribs in this way, increasing 1 st each side of the 4 raglan seam ribs every 2nd row 44 times more, having 1 st more in each stockinette st section between ribs after each successive increase row; keeping 8 sts in stockinette st at front edges to lower edge and working another buttonhole at right front edge every 3 inches. Work 1 row even (95 rows). This completes yoke (483 sts). Leave yarn at left front edge for working body. Slip 75 sts of left front, 103 sts of left sleeve and 127 sts of back on separate strands of yarn, leave next 103 sts on needle for right sleeve, slip remaining 75 sts of right front on strand of yarn.

RIGHT SLEEVE—Join another ball of yarn at back of sleeve, cast on 3 sts for underarm, k these sts, k 15, * p 2, k 1, p 2, k 12, repeat from *, ending last repeat k 15, cast on 3 sts for underarm (109 sts).

2nd row—P 18, * k 2, p 1, k 2, p 12, repeat from *, ending last repeat p 18.

3rd row—K 2 tog, k 16, * p 2, k 1, p 2, k 12, repeat from *, ending last repeat k 16, k 2 tog (107 sts).

4th row—P 17, * k 2, p 1, k 2, p 12, repeat from *, ending last repeat p 17.

5th row—K 2 tog, k 15, * p 2, k 1, p 2, k 12, repeat from *, ending last repeat k 15, k 2 tog (105 sts).

6th row—Work even, continuing ribs. The 5 ribs are continued to lower edge of sleeve.

7th row—Decrease 1 st each side as before (103 sts).

8th row—Work even.

9th row—Work a decrease row same as 9th row of Pullover sleeve. Decrease 6 sts as on Pullover sleeve every 18th row 8 times (49 sts). Work even until sleeve measures 18 inches from underarm. Bind off. Sew sleeve seam.

LEFT SLEEVE—Take up 103 sts and work to correspond to right sleeve.

BODY—Take up sts of left front, k 8, p 2, k 1, p 2, k 62, * pick up and k 6 sts on underarm sts of sleeve *, take up sts of back on left hand end of needle, k 61, p 2, k 1, p 2, k 61, repeat between *'s once, take up sts of right front, k 62, p 2, k 1, p 2, k 8 (289 sts). Continuing buttonholes until there are 8 in all, begin working ribs as follows:

First row—P 8, k 2, p 1, k 2, * p 12, k 2, p 1, k 2 *, repeat between *'s twice more, p 27 (underarm sts), k 2, p 1, k 2, repeat between *'s 6 times, p 27 (underarm sts), k 2, p 1, k 2, repeat between *'s 3 times, p 8.
2nd row—K 8, p 2, k 1, p 2, * k 12, p 2, k 1, p 2 *, repeat between *'s twice more, k 27, p 2, k 1, p 2, repeat between *'s 6 times, k 27, p 2, k 1, p 2, repeat between *'s 3 times, k 8. Repeat these 2 rows until 3¼ inches below underarm, ending with the first row. Continuing to work ribs in this way, decrease 12 sts on next row as on Pullover and repeat every 8th row 4 times (1 st at center of stockinette st sections between ribs, except in underarm sections and stockinette st section at front edges), 229 sts. Continuing ribs, work even until 8½ inches below underarm, ending on wrong side. Increase 12 sts in next row and repeat increases every 14th row twice more (1 st at center of each stockinette st section which was decreased before, as on Pullover), 265 sts. Work ribs even until 14 inches below underarm, ending on right side. Bind off. Do not break yarn.

FINISHING—Working from right side, work 1 s c in each bound-off st on lower edge, 3 s c at corner, 1 s c in every 2nd row on right front edge, 3 s c at corner, 1 s c in each st on neck edge, 3 s c at corner, 1 s c in every 2nd row on left front edge, 3 s c at corner; join.
2nd row—Ch 1, turn, 1 s c in each st of row below, working 3 s c at corners; join. Fasten off.
Join yarn on lower edge of sleeve at seam. Working from right side, work 1 s c in each st on lower edge; join.
2nd row—Ch 1, turn, work 1 s c in each st of row below; join. Fasten off. Work other sleeve in same way.
Work buttonholes in buttonhole st.
Steam, see page 47.
Sew about 23½ inches of 1 inch ribbon to wrong side of each front, sewing under 8 stockinette sts at front edges from neck to lower edge. Cut slits in ribbon under each buttonhole; turn edges of slits under and sew to wrong side of buttonholes.
Sew 8 buttons ¾ inch from left front edge, opposite buttonholes.

SKIRT

MEASUREMENTS FOR FINISHED GARMENT

Width at lower edge 49 inches around.
Hipline (7 inches below Waistline) 37 inches.
Waistline 28¾ inches.
Length 30 inches.

GAUGE: Ribs on skirt are *not* blocked out
33 sts = 4 inches 11 rounds = 1 inch

Cast on 408 sts for lower edge. Join, taking care sts do not twist on needle. Mark end of rounds as an aid in counting.
First round—* K 19, p 2, k 1, p 2, repeat from * around. Repeat this round for 3½ inches. The 17 rib sections of p 2, k 1, p 2 and 17 k gores will be continued for entire skirt.
First decrease round—* K 9, k 2 tog, k 8, p 2, k 1, p 2; repeat from * around (391 sts).
Next round—* K 18, p 2, k 1, p 2, repeat from * around. Repeat this round until 7 inches from lower edge.
2nd decrease round—* K 8, k 2 tog, k 8, p 2, k 1, p 2, repeat from * around (374 sts).
Next round—* K 17, p 2, k 1, p 2, repeat from * around. Repeat this round until 11 inches.
3rd decrease round—* K 8, k 2 tog, k 7, p 2, k 1, p 2, repeat from * around (357 sts).
Continue in this way to decrease 17 sts every 4 inches twice more, decreasing 1 st at center of each k gore and having 1 st less in each gore after each successive decrease round. Always include preceding decrease round in part worked even.
Work 6th decrease round when skirt measures 23 inches or 7 inches shorter than desired finished length (306 sts at hipline). Work a decrease round every 2 inches twice, then every inch twice (238 sts). Work even until skirt measures 30 inches. Bind off. Do not break yarn.

Casing for Elastic—Work as for skirts, see page 46.
FINISHING—Join yarn on lower edge of skirt. Working from right side, work 1 s c in each st on lower edge; join. Ch 1, turn, work 1 s c in each st of row below; join. Fasten off.
Steam, see page 47.
Insert 28 inches elastic in casing.

"Shipboard" No. 2638

(*continued from page* 27)

Neck Borders—Take up 8 sts of right side of cable from safety pin. Join yarn at center and work stockinette st (k 1 row, p 1 row) for 6¾ inches. Bind off. Take up 8 sts of left side of cable and work to correspond to right border.
SLEEVES—Cast on 8 sts for one-half of sleeve border. Work stockinette st (p 1 row, k 1 row) for 4¼ inches, ending with a k row. Cast on 27 sts at end of last row for lower edge of sleeve; break yarn. Slip these 35 sts to other needle. Cast on 8 sts (other half of sleeve border) on same needle with the 35 sts. Work stockinette st (k 1 row, p 1 row) on these 8 sts for same number of rows as on first half, ending with a p row. Cast on 27 sts at end of last row (70 sts on needle). Work cable panel on 22 center sts and join halves of border at center of sleeve as follows:
First row (right side)—K 24, p 3, k 16, p 3, k 24.
2nd row—P 24, k 3, p 16, k 3, p 24. Repeat these 2 rows once.
5th (cable twist) row—K 24, repeat between *'s of 12th row of front once, k 24.
Repeat 2nd row, then repeat first and 2nd row twice.
11th row (right side)—Increase 1 st in first st, k 3, * cast on 1 st by making a loop on right hand needle, k 4 *, repeat between *'s 4 times, work the 22 panel sts, k 3, repeat between *'s 5 times, increase 1 st in last st (82 sts).
Continue cable pattern as on front to top of sleeve insert, twisting cable every 20th row and increasing 1 st each side every 4th row 6 times (94 sts). Sleeve should now measure 4 inches from lower edge.
Bind off 6 sts at beginning of each of next 2 rows for underarm.
Decrease 1 st each side every 2nd row 9 times, every 4th row 5 times (54 sts).
On next row worked from right side, k 2 sts tog twice, work across next 46 sts, k 2 sts tog twice (50 sts). Work 1 row even.
Decrease row—K 2 sts tog 7 times in succession, work across the 22 panel sts, k 2 sts tog 7 times (36 sts).
Next row—Bind off 7 sts, work across sts of panel, bind off last 7 sts. Break yarn and join in last st worked.
Sleeve Insert—Continue cable panel on remaining 22 sts for 10 rows more (there will be 5 rows above last cable twist row). Bind off. Make other sleeve in same way.

FINISHING—Sew seams. Sew the 7 sts bound off at each side on top of sleeve to edges of sleeve insert. Weave cast-on ends of sleeve borders together (being careful not to twist borders) and pin this seam to lower edge of sleeve seam. With right side of border to right side of sleeve, sew upper edge of border to cast-on edge of sleeve, pleating in the 3 p sts at each side of cable panel. Fold other edge of border over onto wrong side and sew to cast-on edge of sleeve from seam to within 2 sts of cable panel, leaving about 6 rows of border free at sides of center of cable. Sew sleeve to armhole with center of cable at shoulder seam, making a ¼ inch pleat at center of cable. Finish other sleeve in same way. Pin end of right neck border at right edge of back opening and end of left border at left edge of opening. Sew borders to neck edge as on sleeves. Join yarn on right edge of neck opening at folded edge of neck border. Working from right side, work 3 s c on end of border (working through both thicknesses), 1 s c in every 2nd row to bottom of opening, 1 s c in each of the 2 bound-off sts, work s c on left edge to correspond. Fasten off. Steam, see directions page 47.

Sew slide fastener to edges of neck opening and border.

Sew waist to skirt, sewing the 22 sts of cable panel to 14 sts on top edge of skirt.

Casing for Elastic—Work as for one piece dress, see page 46.

Insert 28 inches elastic in casing.

Belt Loops—See page 46.

"BRIDGE DATE" No. 2635

(Shown on Front Cover)

Size 16

YARNS—Fleisher's Cassimere Sport Yarn†, 5 balls A (Blouse), 6 balls B (Skirt and Borders on Blouse).

NEEDLES—1 Fleisher's "Comfy-Grip" Sure-Fit 27-inch Circular Steel, Art. 896, Size 3.

1 Fleisher's Steel Crochet Hook, Art. 300, Size 2.

TRIMMINGS—Talon Slide Fastener Style 101, 18 inches long.

1 Fastener Ornament.

IMPORTANT—Check your gauge first, see page 46.

JACKET

MEASUREMENTS FOR FINISHED GARMENT

Bust 35 inches including Fastener.

Width across back at underarm 16¾ inches.

Width across back at shoulders 13 inches.

Length from lower edge of crocheted border to underarm 14 inches.

Length from lower edge of border to back neck edge of border 22 inches.

Sleeves—Width at underarm 12¾ inches.

Length from lower edge of border to underarm 4½ inches.

GAUGE:

Pattern—15 sts = 2 inches 19 rows = 2 inches

Stockinette St—7 sts = 1 inch 9 rows = 1 inch

Pattern at lower edge of back and sleeves is a multiple of 7 plus 13. Entire blouse is worked back and forth on circular needle with color A.

BACK—Cast on 111 sts for lower edge. K 1 row.

Pattern—**First row** (wrong side)—P 11, * insert needle in next st as if to p, wrap yarn twice around needle, p this st, p 6 *, repeat between *'s, ending last repeat p 8 instead of p 6.

2nd row—K 8, * slip next st as to p dropping extra wrap and keeping yarn at back, k 6, repeat from *, ending last repeat k 11 instead of k 6.

3rd row—P 11, * slip next st as to p keeping yarn at front, p 6, repeat from *, ending last repeat p 8 instead of p 6.

4th row—K 8, * drop next st off needle, k next 3 sts, put dropped st back on left hand end of needle (do not twist) and k this st, k 3 *, repeat between *'s, ending last repeat k 8 instead of k 3.

5th row—P 8, repeat between *'s of first row, ending last repeat p 11 instead of p 6.

6th row—K, slipping wrapped sts as before.

7th row—P, slipping wrapped sts.

8th row—K 8, * pass needle in front of work over next 3 sts and insert in front of slipped st, k the slipped st and leave on needle, k the 3 sts at right of st just worked, take slipped st off needle, k 3 *, repeat between *'s, ending last repeat k 8 instead of k 3. These 8 rows complete pattern, which is continued up to yoke.

Work even until 2½ inches from lower edge, ending on wrong side.

Decrease 1 st each side of next row and repeat decreases every 6th row 5 times more (99 sts).

Increase 1 st each side every 4th row 13 times, working all increased sts in stockinette st (k 1 row, p 1 row). Work even on 125 sts until 13½ inches from lower edge, ending with 8th pattern row.

Armholes—Bind off 6 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 2nd row 7 times (99 sts). Work even until 3¾ inches above underarm, ending with 4th pattern row.

Begin yoke. **Decrease row**—P 5, * p 2 tog, p 12, repeat from *, ending last repeat p 8 (92 sts). Work even in stockinette st until 6 inches above underarm.

Shoulders—Bind off 4 sts at beginning of each of next 14 rows (28 sts for each shoulder). Bind off remaining 36 sts for back of neck.

RIGHT FRONT—Cast on 57 sts for lower edge. K 1 row.

Pattern—**First row**—Starting at underarm edge p 12, repeat between *'s of first row of back, ending last repeat p 2.

2nd row—Same as 6th row of back.

3rd row—Same as 7th row of back.

4th row—K 2, repeat between *'s of 4th row of back, ending last repeat k 9.

5th row—P 9, repeat between *'s of first row of back, ending last repeat p 5.

6th and 7th row—Same as 6th and 7th row of back.

8th row—K 2, repeat between *'s of 8th row of back, ending last repeat k 9. Pattern is continued up to yoke.

Work even until 2½ inches from lower edge, ending on wrong side.

Decrease 1 st at end of next row (underarm edge) and repeat decrease every 6th row 5 times more (51 sts). Increase 1 st at underarm edge every 4th row 13 times (64 sts). Work even until same length as back to underarm, ending with 8th pattern row.

Armhole and Neck Shaping—Bind off 7 sts at beginning of next row for underarm. Keeping front edge even, decrease 1 st at armhole edge every 2nd row 7 times (50 sts). Work even until 3¾ inches above underarm, ending with 4th pattern row.

Begin yoke. **Decrease row**—P 5, * p 2 tog, p 12, repeat from *, ending last repeat p 15 (47 sts).

Bind off 5 sts at beginning of next row for neck edge. Working stockinette st, decrease 1 st at neck edge every 2nd row, keeping armhole edge even until 6½ inches above underarm.

Shoulder—Bind off 4 sts from armhole edge every 2nd row 7 times, continuing to decrease at neck edge until there are 14 decreases in all, then work neck edge even. Fasten off.

LEFT FRONT—Cast on 57 sts for lower edge. K 1 row.

Pattern—First row—Starting at front edge p 5, repeat between *'s of first row of back, ending last repeat p 9. Continue pattern in this way, working to correspond to right front; decreasing and increasing for underarm edge at *beginning* of rows worked from *right* side, neck at *beginning* of rows worked from *wrong* side.

SLEEVES—Cast on 63 sts for lower edge. Work 8 rows stockinette st.

Increase row—K 12, * increase 1 st in next st, k 1, repeat from * 19 times, k 11 (83 sts). Work pattern as on back, increasing 1 st each side every 4th row 6 times (95 sts). Continuing pattern, work even until 4 inches from lower edge, ending with 4th pattern row. Bind off 6 sts at beginning of each of next 2 rows for underarm. Decrease 1 st each side every 8th row 6 times (71 sts). Work 2 rows even, ending with 8th pattern row.

Decrease row—P 2 sts tog 10 times in succession, * p 1, p 2 tog, repeat from * 10 times, p 2 sts tog 9 times (41 sts).

Next row—Bind of 12 sts, k until 17 sts on needle, bind off remaining 12 sts. Break yarn.

Sleeve Insert—Join yarn in last st worked and continue in stockinette st on 17 sts for 1¾ inches. Bind off. Make other sleeve in same way.

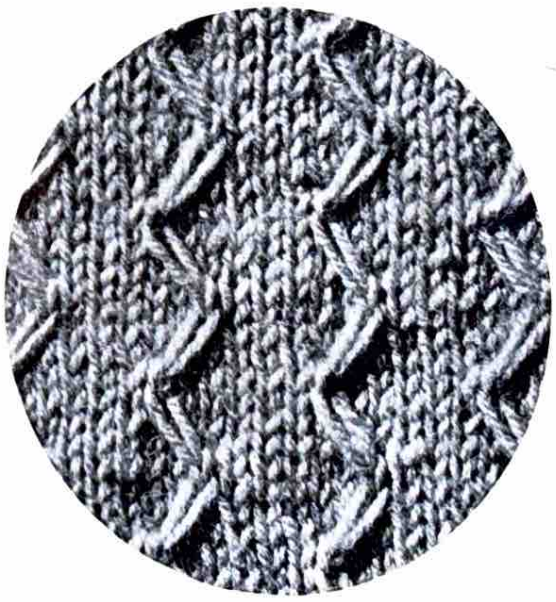

FINISHING—Sew seams. Sew 12 sts bound off at each side of top of sleeve to edges of sleeve insert. Sew sleeves to armholes with sleeve seam at center underarm and center of insert at shoulder seam. Join B on lower edge of sleeve at seam. Working from right side, work 4 rows of s c, working 1 s c in each st. Fasten off. Work other sleeve in same way. Join A on right front at lower edge, working from right side, work 1 s c in every 2nd row on front edge, 3 s c at corner, 37 s c to shoulder seam, 1 s c in each st on back neck edge, continue s c on left side to correspond. Fasten off at lower edge. Join B on lower edge of blouse at right underarm seam. Working from right side, work 1 s c in each st on lower edge of front, 3 s c at corner, 1 s c in each s c on front and neck edges and in each st on lower edge of left front and back, working 3 s c at corners; join. Ch 1, do not turn, work 2 rows of 1 s c in each st, working 3 s c at corners.

4th row—Ch 1, work 1 s c in each st of row below, working 2 s c at lower corners only; join. Fasten off. Steam, see directions page 47.

Sew slide fastener to front edges of borders, with top of fastener ¼ inch below neck edge and bottom at lower edge of borders. Using A, work buttonhole st over ring on slide. Fasten ornament to ring.

SKIRT

MEASUREMENTS FOR FINISHED GARMENT

Width at lower edge 46½ inches around.
Hipline (7 inches below Waistline) 37 inches.
Waistline 28 inches.
Length 29 inches.

GAUGE: 7 sts = 1 inch 9 rounds = 1 inch

Using B, cast on 325 sts for lower edge. Join, taking care sts do not twist on needle. Mark end of rounds as an aid in counting. K 1 round.

Begin panel of 5 zig-zag stripes at center front of skirt.

Pattern—First round—* Insert needle in next st as to k, wrap yarn twice around needle, k this st, k 27 *, repeat between *'s 4 times, k remaining 185 sts.

2nd round—* Slip next st as if to p dropping extra wrap and keeping yarn at back, k 27, repeat from * 4 times, k to end of round.

3rd round—K, slipping wrapped sts as if to p and keeping yarn at back.

4th round—* Take slipped st off needle, k next 3 sts, put st back on left hand end of needle and k this st, k 24, repeat from * 4 times, k to end of round.

5th round—K 3, repeat between *'s of first round 5 times, k to end of round.

6th and 7th round—Same as 3rd round.

8th round—* Pass needle in front of work over next 3 sts and insert in front of slipped st, k this st and leave on needle, k the 3 sts at right of st just worked, take slipped st off needle, k 24, repeat from * 4 times more, k to end of round. These 8 rounds complete pattern. Repeat pattern 6 times more. Continue pattern on 3 center stripes for 16 rounds, discontinuing 1 stripe at each side of panel. Continue pattern on the 1 center stripe for 16 rounds, discontinuing other stripes. This completes pattern panel.

First decrease round—* K 23, k 2 tog, repeat from * around (312 sts). K until 13 inches from lower edge.

2nd decrease round—* K 22, k 2 tog, repeat from * around (299 sts).

Continue in this way to decrease 13 sts in a round every 3 inches twice more, having 1 st less between decreases in each successive decrease round. Work 5th decrease round when 22 inches or 7 inches shorter than desired finished length (260 sts at hipline). Work 6th decrease round when 24 inches, then a decrease round every inch 4 times (195 sts). K until skirt measures 29 inches. Bind off. Do not break yarn.

Casing for Elastic—Work as for skirts, see page 46.

FINISHING—Join B on lower edge of skirt. Working from right side, work 2 rows s c on lower edge, keeping work flat. Fasten off.

Steam, see page 47.

Insert 28 inches elastic in casing.

KNITTING STITCHES

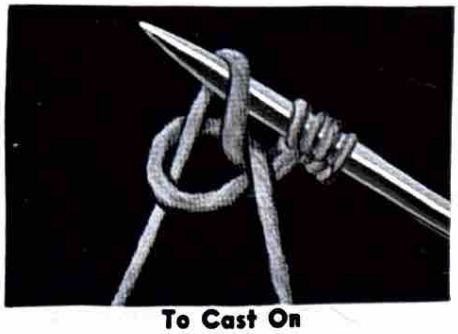

To Cast On

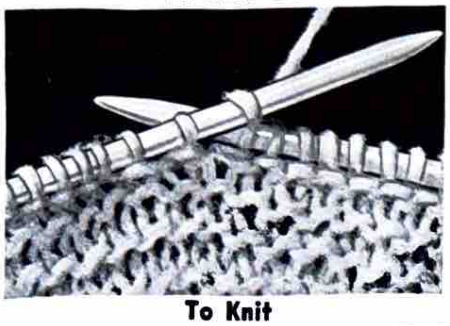

To Knit

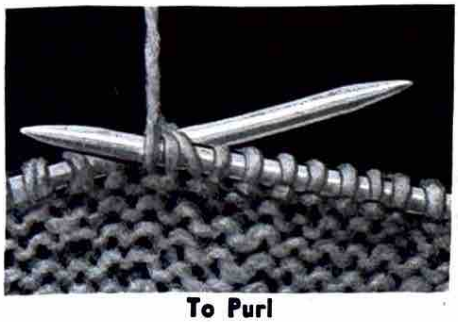

To Purl

Stockinette Stitch

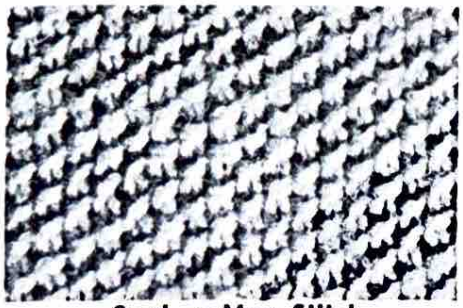

Seed, or Moss Stitch

To Cast On

Make a loop, leaving a long end and slip loop to a needle; with loose end, make a loop on left thumb; insert needle in this loop and with end attached to ball, knit a st on the needle; tighten loose end with left hand.

To Knit (k)

Holding the needle containing the sts in the left hand, with the yarn back of the work, insert the right-hand needle into first loop and make a loop on right-hand needle, as for casting on, slip loop from left needle. The loops should be retained on the right-hand needle. Work each st in this way until no loop remains on the left-hand needle.

When the row described above is repeated back and forth, any number of times, the work becomes alike on both sides and is called GARTER STITCH.

To Purl (p)

Hold as for plain knitting, but bring the yarn to front of the work. Insert the right-hand needle from right to left through the front of the next st, pass the yarn around the back of the right-hand needle, draw it over the needle and through the loop, backwards, and let the st slip off the left needle, just as in plain knitting. When purling comes after plain knitting in the same row, the yarn must be brought from back to front under the point of the right-hand needle, and it must be brought back again in the same manner before returning to plain knitting.

Stockinette Stitch

Cast on a desired number of sts on a needle, k 1 row, p 1 row for the required length.

To Slip a Stitch in Knitting

Take it from one needle to the other without knitting. Insert needle as if to knit, unless otherwise stated.

Seed, or Moss Stitch

Cast on an uneven number of stitches. **First row**—K 1, p 1 and repeat across row, ending k 1. Repeat this row for the length required, always having a knitted stitch come over a purled stitch and vice versa.

KNITTING STITCHES

To Increase

1—Knit 1, but do not slip it from the needle as usual; turn needle to which the sts are being knitted behind the first needle, and knit a second st on the back thread of the same st, after which slip the latter from the needle as usual. (Illustrated.)

2—Knit 1, draw up an extra st in side of next st *in row before last row*, then knit next st.

By these two methods of increasing, a st is added without making a hole in the work.

3—"Over" means to throw the yarn over the right hand needle, which is another way of increasing a st. This method makes a hole in the work and is used to provide space for a beading, to work a lace pattern, etc.

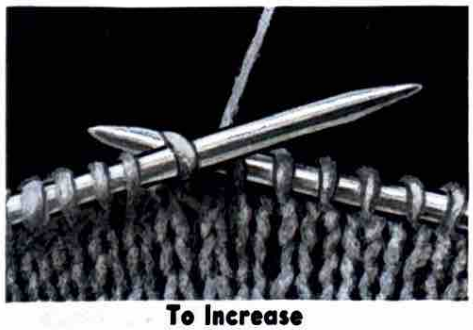

To Increase

To Decrease or Narrow

1—Knit 2 sts together. Work as with plain knitting, but insert needle into two sts at a time, instead of one.

2—Slip 1, k 1, pass the slipped st over the knitted st (slip, knit and pass).

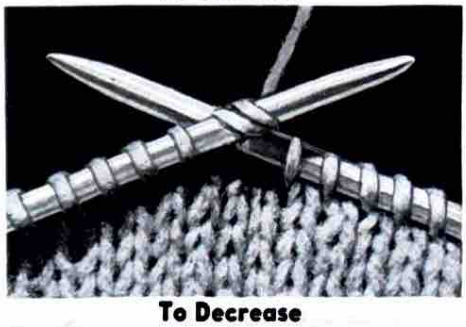

To Decrease

To Bind Off

Knit 2 sts, * pass the first st over the second, knit another st, again having 2 sts on the needle. Repeat from * until only 1 st remains. Break off the yarn and draw it through the last st.

To Bind Off

To Sew Seams

Hold edges to be joined close together, with right side toward you. Using a tapestry needle, bring yarn from wrong to right side; beginning at top insert needle through 2 threads on edge of piece at right (see cut), pull yarn through; insert needle through 2 threads on edge of piece at left, pull yarn through. Continue in this way keeping seam elastic.

To Sew Seam

Weaving Stockinette Stitch

Thread a tapestry needle and bring pieces to be joined close together. Draw up yarn in first st on upper piece, inserting needle from wrong side; insert needle from right side in first st on lower piece and bring up through next stitch from wrong side—draw up yarn; * insert needle from right side in same st as before on upper piece and bring up through next st from wrong side—draw up yarn; insert needle from right side in same st as before on lower piece and bring up through next st—draw up yarn; repeat from * until all sts are joined, and fasten yarn well before breaking off.

Weaving Stockinette Stitch

CROCHET STITCHES

Chain Stitch

Single Crochet

Half Double Crochet
or Short Double Crochet

Double Crochet

Treble Crochet

Chain Stitch (ch)

Make a loop on hook, * wrap and draw yarn through the preceding loop, repeat from * the desired length. Each loop is called one chain st (ch).

Crocheted Slip Stitch (slip st)

Insert the hook in next st, wrap and draw through both loops on hook.

Single Crochet (s c)

Make a chain the length required, turn, insert the hook in 2nd ch from hook and draw yarn through it, wrap and draw yarn through both loops on hook. Continue to work in this way in each ch to end of row. **2nd row**—Turn the work, ch 1, * insert the hook in top of next st taking up both threads, wrap and draw yarn through, having 2 loops on the hook, wrap and draw yarn through both loops on hook. Repeat from * across row.

Half Double Crochet (h d c) or Short Double Crochet (s d c)

Make a chain the length required, turn, skip 2 ch, * wrap and draw up a loop in next ch, wrap and draw yarn through all 3 loops on hook; repeat from * in each ch to other end. A new row is begun with 2 chs after turning.

Double Crochet (d c)

Make a chain the length required, turn, wrap, insert the hook in the 3rd ch from hook and draw yarn through, having 3 loops on hook; wrap and drawn yarn through 2 loops, again wrap and through 2 loops. For the 2nd st, * wrap and draw yarn through next ch, wrap and through 2 loops and then wrap and through 2 loops more, as before; repeat from * to other end of chain. **2nd row**—Turn, ch 2, wrap, insert the hook in the top of the first d c of preceding row taking up both threads, and work off as in first row.

Treble Crochet (tr)

Treble crochet is made in the same way as double crochet, only wrap the yarn around the hook twice, instead of once. Work the loops off the hook as follows: wrap, draw through 2, wrap, draw through 2, wrap and draw through 2.

●

Abbreviations and Terms Used in Knitting and Crocheting

ch—chain
s c—single crochet
h d c—half double crochet
s d c—short double crochet
d c—double crochet
tr—treble
k—knit
p—purl
st—stitch
tog—together
over—yarn over

slip, k and pass—slip 1, k 1, pass the slipped st over the knitted st.

An *Asterisk* (*) indicates that the directions immediately following are to be repeated the given number of times, in addition to the original. Thus "repeat from * 3 times" means to make 4 times in all.

The ** and † are used in the same way.

Even means that a row is to be worked without either increase or decrease.

Over means to throw the yarn over the right-hand needle, which is another way of increasing a st.

Work means to continue in the stitch which has been described.

CONVENIENT MEASUREMENT CHART

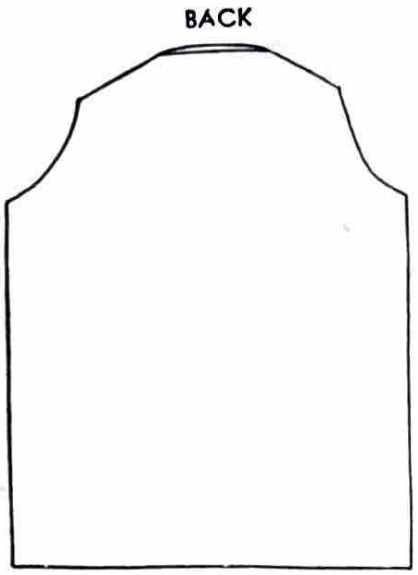

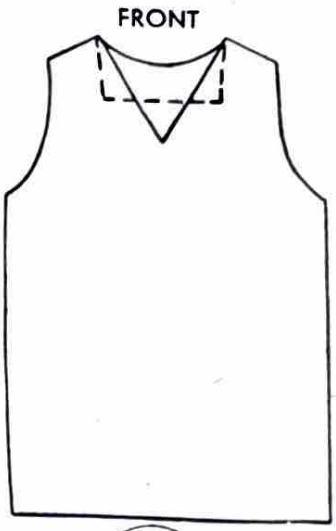

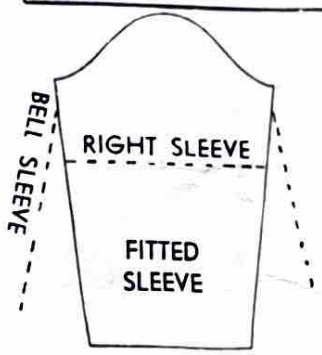

Bust .....

Waist .....

Hips (7 to 9 inches below waist) .....

Across Back from Underarm to Underarm .....

Shoulder to Neck .....

Shoulder to Shoulder .....

Sleeve Length—Top arm to Wrist .....

Sleeve Length—Underarm to Wrist .....

Sleeve Width at upper part of arm .....

Width of Sleeve at Wrist .....

Waist Length up to Armhole .....

Waist Length to back of Neck .....

Coat Length to Armhole .....

Skirt Measurement

Decreasings: Indicate on diagram how many in rounds and how far between decreasing rounds:

Finished Length .....

Width of Skirt at lower edge .....

Width of Skirt at Hipline .....

Width of Skirt at Waistline .....

GUIDE TO INTERCHANGEABLE YARNS

If you should want to make the garment which you have selected of some yarn other than that called for in the directions, follow the guide given below. It shows which yarns are interchangeable; or, in other words, which yarns may be substituted for one another, using the same directions.

Interchangeable { Lustre Iceland, French Zephyr, Petite Bouclette

Interchangeable { Cassimere Sport Yarn†, Shetland Floss, Crepe Boucle

Interchangeable { Angel Crepe†, Magic Flake†

Interchangeable { Cheviot Zephyr†, Sport Angora

*Interchangeable { Ladyfair†, Kashyr†

Interchangeable { Crepe Gora†, Bretton Tweed†

*** Kashyr or Ladyfair may be used in place of Shetland Floss or the other yarns in the same group by using the next size larger needle or crochet hook called for in the directions. If Shetland Floss is to be used in place of Kashyr or Ladyfair, use the next size smaller needle or crochet hook than is called for in the directions.**

† All yarns marked with a † have been registered U.S. Pat. Off.

SOME KNITTING WISDOM

☆

CHECK YOUR GAUGE FIRST — Before starting your garment, knit a small sample. If you cannot procure the exact gauge given in the direction, try a needle one or even two sizes smaller or larger until you obtain the exact gauge specified for the garment you intend to make. The needles recommended in the directions are based as nearly as possible on the average knitter's work, but because some knitters work tightly and others loosely, we suggest you test your own work first to verify the gauge.

If you find you have to use a different size needle than that called for in the directions, the change will not in any way alter your garment, provided your gauge is in accordance with that called for in the directions.

DIRECTIONS FOR GARMENTS IN THIS BOOK ARE BASED ON THE FOLLOWING MEASUREMENTS:

	Bust	Waist	Hips (7 inches below waist)
Size 16 (Size 34) . . .	35 inches	28 inches	37 inches
Size 18 (Size 36) . . .	37 inches	30 inches	39 inches
Size 20 (Size 38) . . .	39 inches	32 inches	41 inches
Size 40	41 inches	34 inches	43 inches
Size 42	43 inches	36 inches	45 inches

TO CHANGE SIZE OF GARMENTS TO ANOTHER REGULATION SIZE—Add the number of sts required to make 1 inch (see gauge at beginning of directions for garment to be made) to both the back and front of garment for each size larger than the size given in directions; or subtract the number of sts required for 1 inch from both back and front for each size smaller. When a pattern stitch is used, add (or substract) the number of sts given for 1 or more repeats (or "multiples") of pattern, according to the number of inches required. Then follow the directions given. When shaping armholes, bind off 1 st more each side for one size larger (1 st less each side for one size smaller). Make the armhole 1/4 inch longer at both back and front for one size larger (1/4 inch shorter for one size smaller). When shaping shoulders, bind off more (or less) sts than given in directions for shoulders and back of neck, adding 1/3 of the extra sts to each shoulder and remaining sts to back of neck. When casting on the sts for lower edge of sleeve, add 1/4 inch for each size larger, then increase 1/4 inch extra. This will make sleeve 1/2 inch wider at the underarm for each size larger.

IF YOU VARY FROM A REGULAR SIZE—Take your own measurements wherever you differ from the size given in the directions. Multiply the number of inches of each of these measurements by the number of sts (or rows) equivalent to 1 inch, to obtain the number of sts (or rows) required at each particular place where it is necessary to make your garment larger, or smaller. Follow directions given changing number of decreases or increases to obtain desired width or the number of rows between decreases or increases to obtain desired length. In making a garment, always count the rows on the front and back, being careful to have the same number on each piece. Count the rows in some way on each sleeve.

BELT LOOPS—Join yarn 1/2 inch below waistline at underarm. Make a chain the width of belt and fasten above waistline. Make loop at other underarm in some way.

CASING FOR ELASTIC FOR SKIRTS — Holding wrong side of skirt toward you, ch 3, * skip 1 st, 1 slip st in the next st at left in 4th row below; ch 3, 1 slip st at top of skirt in 3rd st at left of first st, ch 3, repeat from * around top of skirt, ending with a slip st in the first st. Turn right side toward you. Work 1 row s c around top of skirt, working 1 s c in each st. Join with a slip st. Fasten off.

CASING FOR ELASTIC FOR ONE PIECE DRESS —Work as for casing for skirts, commencing 2 rounds above waistline and working next slip st in 2nd round below waistline, omitting the row of s c on top of skirt.

SOME KNITTING WISDOM

☆

BEADING FOR ELASTIC—With crochet hook, work 1 tr (twice around hook) in first st on waistline, * ch 2, skip 2 sts on edge, 1 tr in next st, repeat from * around, join with a slip st, ch 1, work 1 s c in each st around top of skirt, join with a slip st. Fasten off.

TO WASH KNITTED GARMENTS—First take complete measurements of your garment, then using Lux Soap Flakes, make thick suds with hot water; then add enough cold water, to make it lukewarm (comfortable wrist temperature). Avoid using hot water which shrinks wool. Immerse garment and gently work suds through the fabric—do not rub or twist or allow the weight of the garment to pull it out of shape. Keep the garment supported in the hands when squeezing out water.

Rinse thoroughly in three lukewarm waters immediately after washing, squeezing garment gently between the hands to remove soap. Do not twist or wring. Roll garment between two turkish towels to knead out excess moisture—unroll at once and shape garment according to original measurements, leaving it on turkish towel. Let it dry slowly, not forgetting to stretch it frequently into its natural shape, according to measurements. While garment is still damp, block according to directions given below.

TO BLOCK OR STEAM YARN GARMENTS—Turn garment wrong side out. Lay flat on a pressing board. Pin edge of garment if necessary to make it lie flat. For one-piece dress, pin across waistline, then pin skirt according to directions given below. Lay a wet cloth over garment. Pass a hot iron over the cloth allowing the steam to go through the garment. Do not allow the weight of the iron to rest on the garment. Leave garment pinned until thoroughly dry.

TO BLOCK OR STEAM YARN SKIRTS—Turn wrong side out. Pin top of skirt to pad every ¾ inch. Stretch skirt to desired width and length and pin to pad. Steam as for yarn garments. Leave until dry. Turn up side next to pad and steam. Leave until dry. Remove from pad. Steam out creases formed at sides.

TO STRETCH PATTERN STITCH GARMENTS IN BLOCKING—In special cases when a stitch of the rib type is used, it is necessary to stretch garments out to their correct width. Pin garment to pressing board, stretching to measurements given for finished garment. Then follow directions for steaming yarn garments or skirts, using enough pressure on iron so that garment will retain desired measurements. Be careful not to flatten pattern too much or to leave a mark of the iron by pressing too hard.

WHEN GARMENT IS NOT IN USE—Be sure to lay your garment flat when not in use—never under any circumstances hang your garment on a clothes hanger or hook.

BUY SUFFICIENT YARN—At the time you make your initial purchase of the yarn for the garment you intend to make, it is important that you buy the complete amount of each color necessary to finish the article, making sure that it is all of ***one dye lot number*** as the next lot number of any color may differ slightly in shade from the original lot you purchased and make it impossible to complete your garment satisfactorily.

FLEISHER KNITTING NEEDLES AND CROCHET HOOKS—When you make a garment with Fleisher Knitting Needles or Crochet Hooks you are assured of the best results. Fleisher Knitting Needles and Crochet Hooks are made of the finest materials, they are smooth to the touch and will not catch or split the yarn you work with. Each set of directions specifies the type of Fleisher needle or hook needed to make the garment—be sure to insist upon it—it will help you achieve a perfect garment.

Smart! Safe! Ruined!

This charming two-piece model, beautifully knit after one of the season's smartest designs, was sacrificed to help YOU avoid washing mistakes.

This half was washed the Lux way—gently cupped in cool Lux suds and pinned to its outline to dry. It's unshrunken—soft as new.

This half was rubbed with an ordinary cake of soap in water that was too warm. It's badly shrunken—the fibers matted and felted.

It's *easy* to wash knitted things *safely* this way:

Draw an outline of the garment on paper before washing, to use in shaping it to correct size later.

Use rich, lukewarm to cool Lux suds.

Gently cup the suds through garment, handling as little as possible.

Rinse in waters of the same temperature as your suds.

Roll your garment in a Turkish towel to remove most of the moisture.

Unroll at once and shape garment to outline, pinning with rust-proof pins.

• • •

Wool fibers are so sensitive that harsh or careless treatment causes them to shrink and mat. Beware of *too warm* water, harsh soaps containing harmful alkali, and *rubbing* with cake soap.

Having no harmful alkali, Lux doesn't injure the natural softness of the fibers, helps to keep them like *new*. Anything safe in water is safe in gentle Lux.

...won't shrink woolens

PRINTED IN U. S. A.